

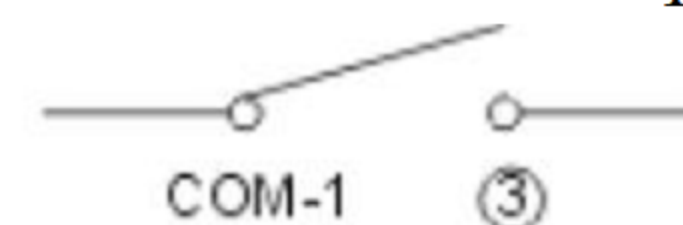


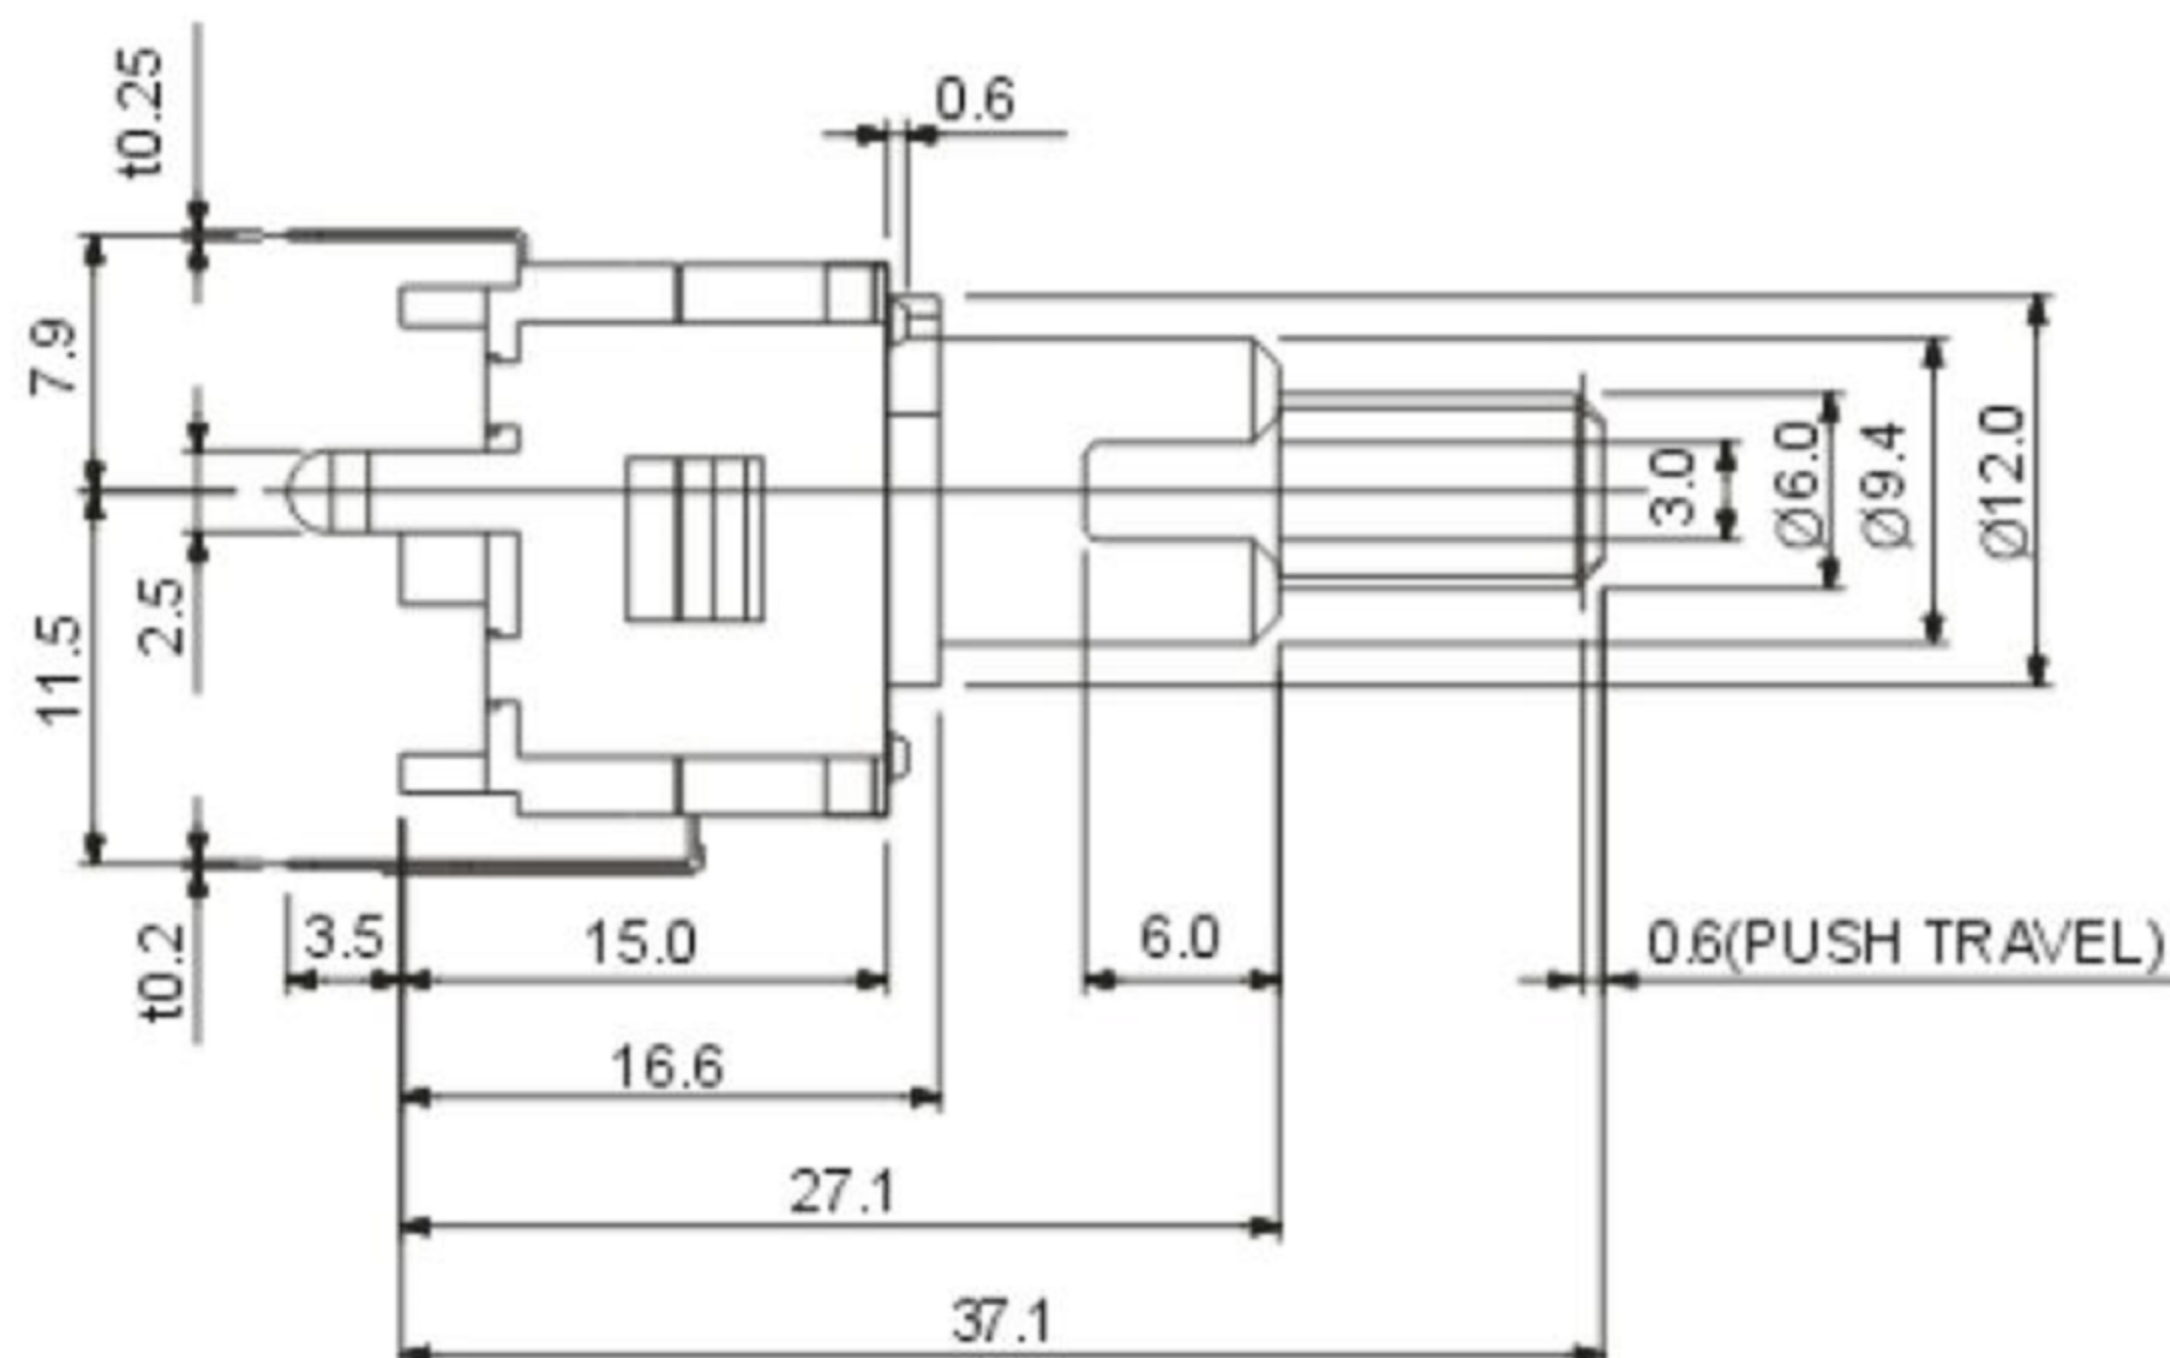


CAD FILE:

ROHS

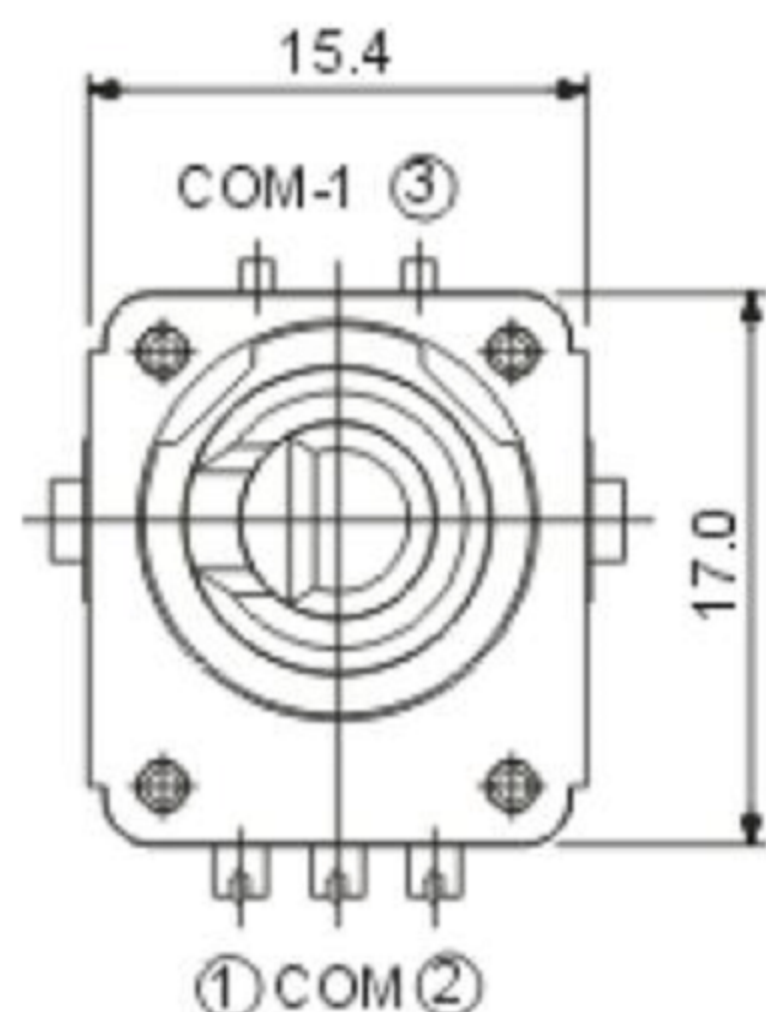

CIRCUIT DIAGRAM(TACT SW PART)

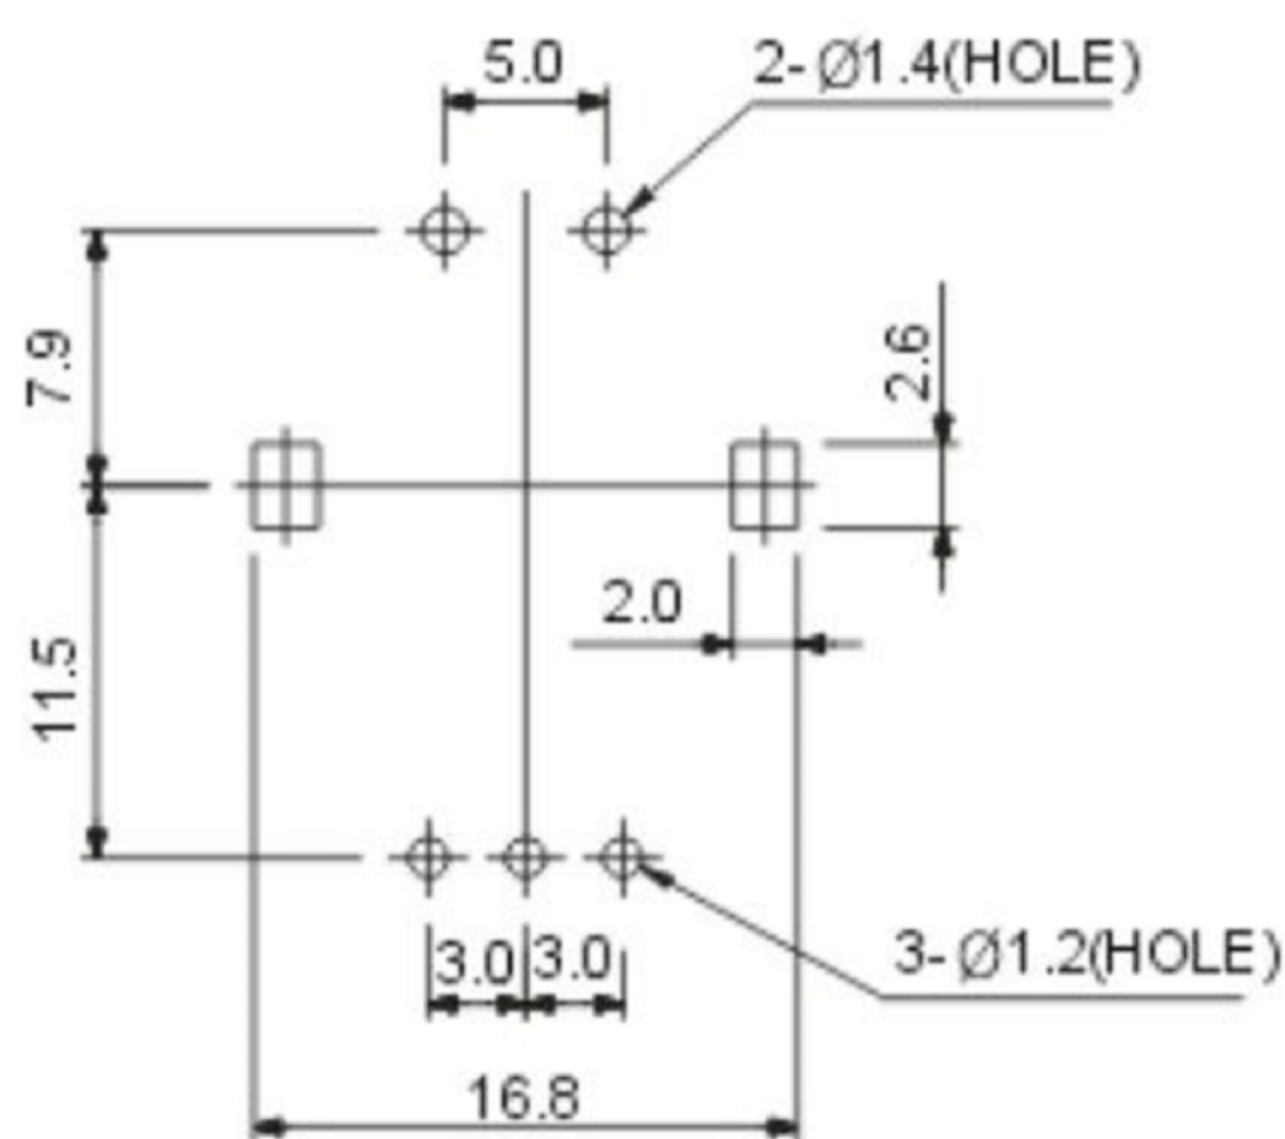

P.C.B HOLE DIMENSION

* O: ON X:OFF

C.C.W

C.W

Shaft Position		1	2	3	4	5	6	7	8	9	10	11	12
Terminal		1	2	3	4	5	6	7	8	9	10	11	12
TERMINAL-1		O	X	X	O	O	X	X	O	O	X	X	O
TERMINAL-2		O	O	X	X	O	O	X	X	O	O	X	X

- Rating:
 - Encoder s/w part: DC 28V 10mA
 - Tact s/w part: DC 12V 50mA
- Contact Resistance
 - Encoder s/w part: 30mΩ
 - Tact s/w part: 100mΩ
 - Total Rotation Angle: 360° (Endless)
- Number of Clicks: 12Clicks
- Click Angle: 30gf
- Rotation Torque(Encoder s/w part): 270±50gf.cm
- Operating Force(Tact s/w part): 260±50gf
- Operating Life:
 - Encoder s/w part: 30,000 Cycles
 - Tact s/w part: 100,000 Cycles
- Push Travel: 0.60
- Circuit: 2bit

8					TOLERANCE UNLESS SPECIFIED					
7										
6					WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	A	2012-9-25	初 版		ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Encoder Swith			UNIT : mm	DRWG NO.: XB-JES-1512T	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED	MODEL: XB-JES-1512T				2012-9-25	
1	KNOB	PPA	1	BLACK				CHK'D	DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			APPD.	ZENQ. CHEN	2012-9-25