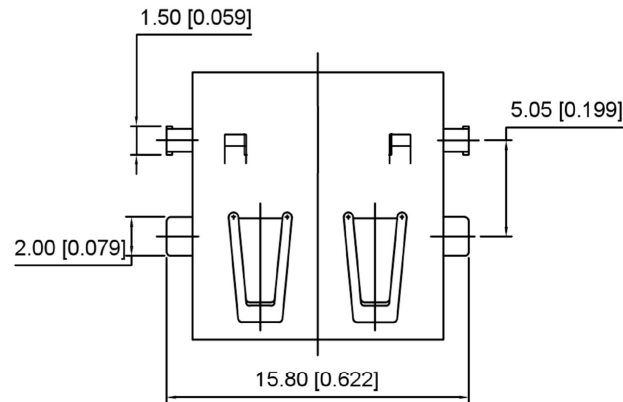
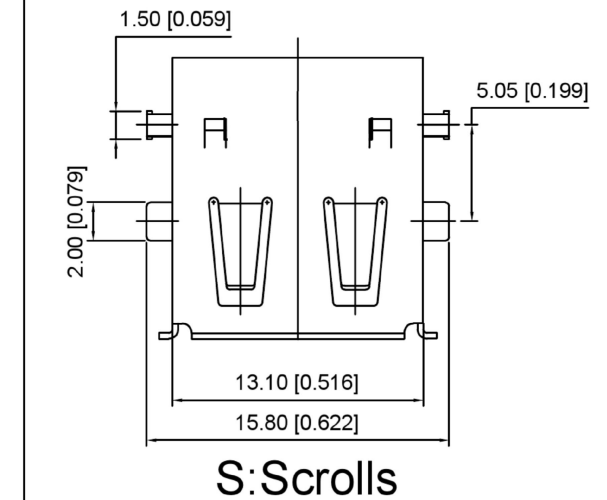
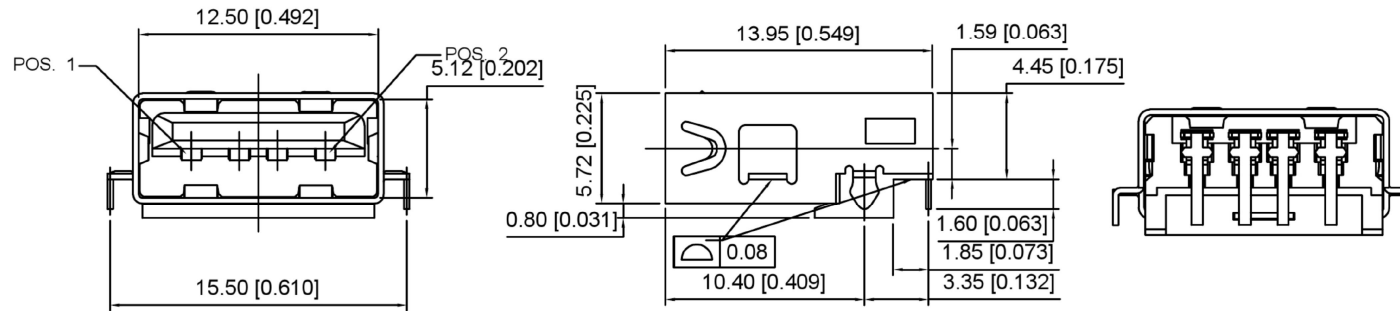


Housing Material: LCP 94V-0, black/White
 Contact Terminal: COPPER ALLOY. (T=0.25mm)
 Metallic Shell: SUS

FINISH:

2-1. CONTACT: UNDER PLATED 50u" MIN NICKEL ALL AREA.
 100u" MIN TIN IN SOLDER TAIL AREA.
 30u" MIN. GOLD PLATED AT CONTACT AREA.

2-2. SHELL: NICKEL 50u" MIN. PLATING OVERALL.

ENVIRONMENTAL CHARACTERISTICS:

3-1. OPERATION TEMPERATURE RANGE : -10°C TO +85°C.

U221-04XN-4BU02-XS

1: Au 1U"
 5: Au 15U"
 6: Au 30U"

1: PBT
 2: PA6T
 3: PA9T
 4: LCP

S: SUS
 S: Scrolls F: Flat
 W: WHITE B: BLACK

							DSND		SCALE: N/A	MODEL TYPE: USB 2.0		
							DWN		VIEW: 	PART NO.:		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4	U221-04XN-4BU02-XS		
REVISIONS				UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						
						WEIGHT		SHEET		REVISION		
								1/1		A0		