


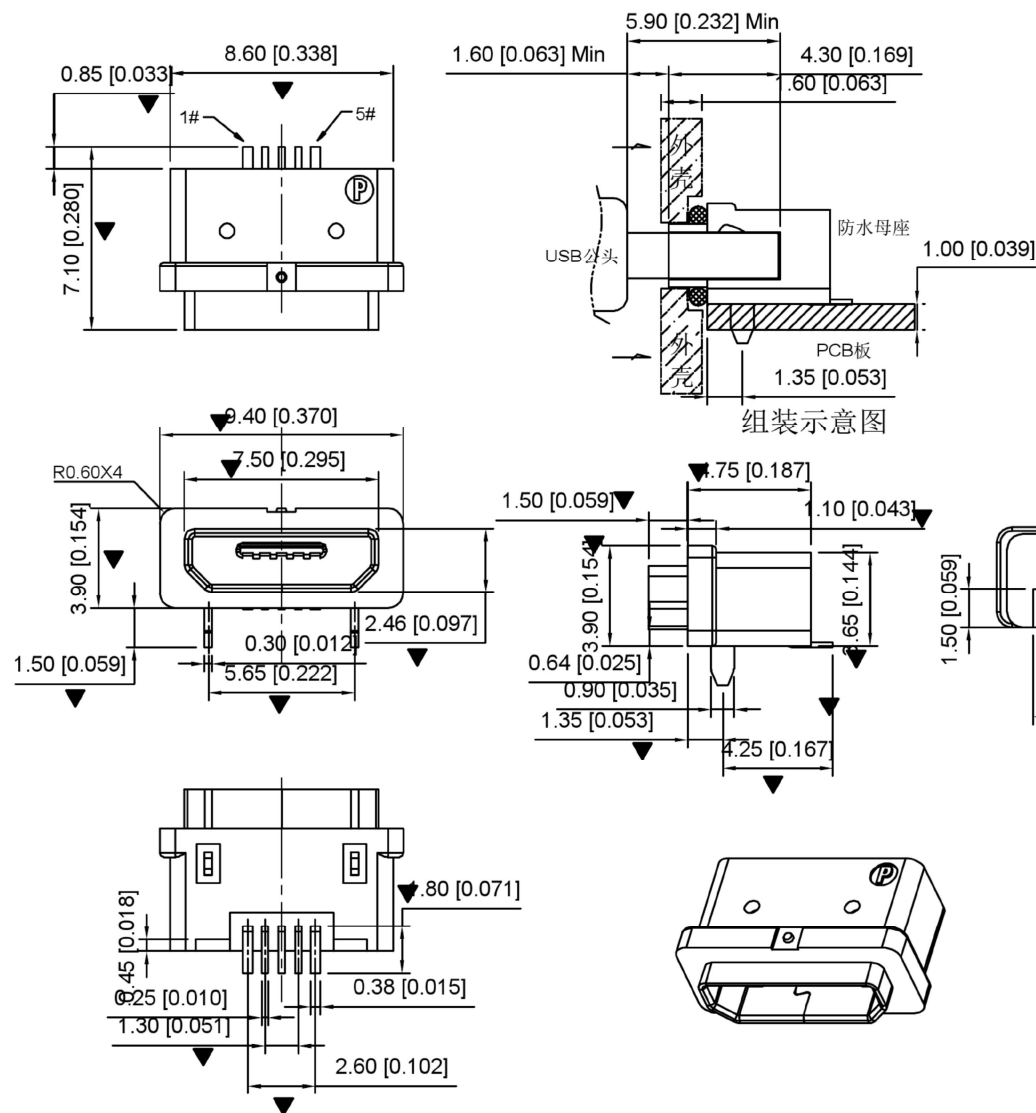


Notes:

1. Dimension shall be interpreted per ASME Y14.5M1994
2. Dimension marked ∇ & $\blacktriangledown$ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data

Specification:

1. Current Rating: 2.0 AMP
2. Voltage Rating: 30V AC, DC
3. Dielectric Strength: 500V AC RMS for 1 minute
4. Contact Resistance: 30mΩ Max.
5. Insulator Resistance: 500M 2Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

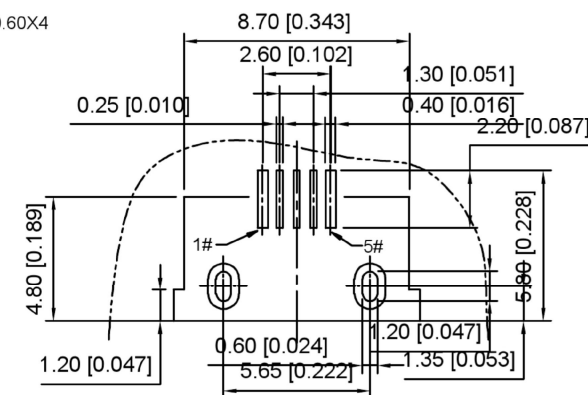

P.C.B LAYOUT

3	Shell	1	SUS304R-1/2H Ni Plating T=0.30mm(3U)	
2	Contact	5	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm (1U)	
1	Housing	1	PA9T&LCP (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

							DSND		SCALE: N/A	MODEL TYPE: MICRO USB	
							DWN		VIEW: 	PART NO.:	
							CHKD		UNIT: mm/in	DWG NO.:	
							APPD		SIZE: A4	U-E-M5SS-W-3	
REVISIONS						UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD			
www.alpsr.com www.gdxjdz.com www.xbswitch.com											