
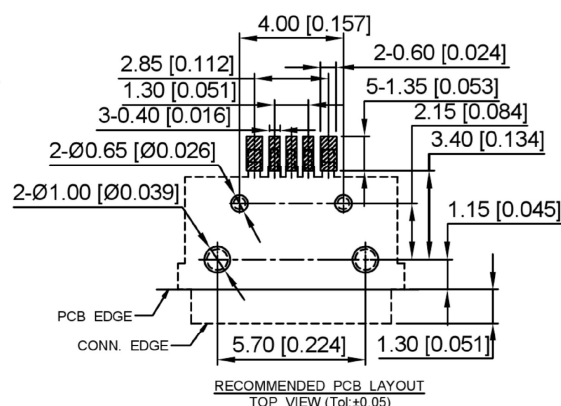
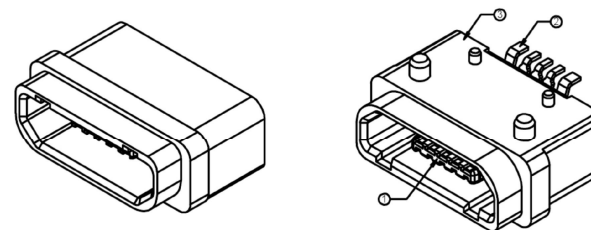

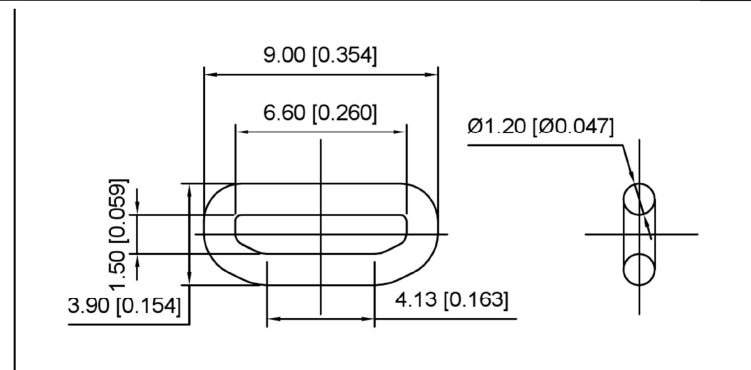




- 1.CONTACT CURRENT RATING:1.0A(SIGNAL PIN2,3,4);2.0A(POWER PIN1,5).
- 2.CONTACT RESISTANCE:30mΩ MAX.:
- 3.INSULATION RESISTANCE:1000MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 100V AC MIN;
- 5.DURABILITY:5,000 CYCLES MIN;
- 6.CONNECTOR MATING FORCES:25N(2.55Kgf)MAX.;
- 7.CONNECTOR UNMATING: FORCES: 2~25N(0.20~2.55Kgf);

③	Shell	1	SUS304R-1/2H	Ni Plating T=0.3mm (3u)
②	Terminal	5	Phosphor Bronze C5191R-EH	Au/Ni Plating T=0.2mm (1u)
①	Housing	1	HI-TEMP PLASIC UL 94V-0	BLACK
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

									DSND		SCALE: N/A	MODEL TYPE: MICRO USB		
					ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
					L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
					4<L ≤ 16	±0.3		APPD		SIZE: A4	U-E-M5SS-W-4			
					16<L ≤ 63	±0.4								
					L > 63	±0.5								
					UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION	
REVISIONS												1/1	A0	
www.alpsr.com www.gdxdz.com www.xbswitch.com														
</														