


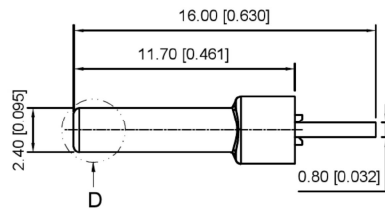

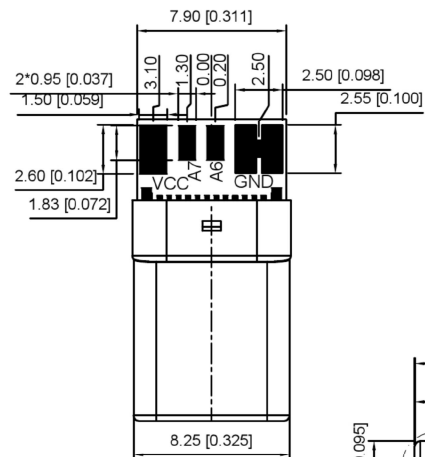


P/N	R/C
U261-12XXN-4B0422	R1(56K Ω ±5%)黑色 珍珠镍
U261-12XXN-4B0425	R2(5.1K Ω ±5%)黑色 珍珠镍


$$\frac{D}{2:1}$$

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	D-	D+	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn			SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12



U261-12XXN-4B0422 C TYPE PLUG: PCB:

1: Au
2: Ni

1: Au1u''
2: Au3u''
4: Au15u''
5: Au30u''

A1+A12+B1+B12
A4+B4+A9+B9
A5
A6
A7
Latch+Shell

R1
R2

GND
VCC
A6
A7
Latch+Shell

REMARKS:

- 1.CONTACT INSERTION AND WITHDRAW FORCE :
 - 1.Insertion force : 5N-20N max.
 2. Withdrawal force : 8N-20N.
 - 3.Durability : 10000Cycles.
- 2.ELECTRIC PROPERTY :
 - 1.Contact current rating : 3A.
 - 2.Dielectric Strength : 100V AC(RMS).
 - 3.Insulation Resistance : 100 megaohms min.
 4. Contact resistance :
40mOhms MAX.FOR VBUS,GND AND OTHER CONTACT
50mOhms MAX.AFTER ENVIRONMENT TEST
- 3.AMBIENT TEMPERATURE :
 - 1.Operating temperature : -55°C to +85°C.

6	Shrapnel	SUS T=0.10mm	Ovep-plating: Ni
5	Shell	SUS T=0.15mm	
4	Terminal	C7025 T=0.15mm	Ovep-plating: Au Ni/Sn
3	Latch	SUS T=0.4mm	
2	Housing	LCP	
1	Housing Stopper	LCP	UL94-0
ITEM	DESCRIPTION	MATERIAL	REMARKS

								DSND		SCALE: N/A	MODEL TYPE: Type-C 3.1		
				ANGLAR	±5°			DWN		VIEW: 	PART NO.:		
				L ≤ 4	±0.2			CHKD		UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16	±0.3			APPD		SIZE: A4	U261-12XXN-4B0422		
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION	
www.alpsr.com www.gdxdz.com www.xbsswitch.com											1/1	A0	