

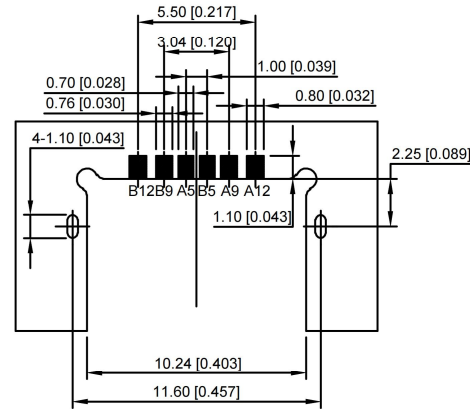





- 1.CURRENT RATING: 3.0A MAX
- 2.VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 ~85
- 4.CONTACT RESISTANCE: 40 MILLIONHM MAX
- 5.INSULATION RESISTANCE: 100 MEGOHMS MIN
- 6.LNSERTION FORCE: 5N~20N
- 7.UNMATING FORCE: 8N~20N
- 8.DURABILITY: 10.000 CYCLES
- 9.WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7

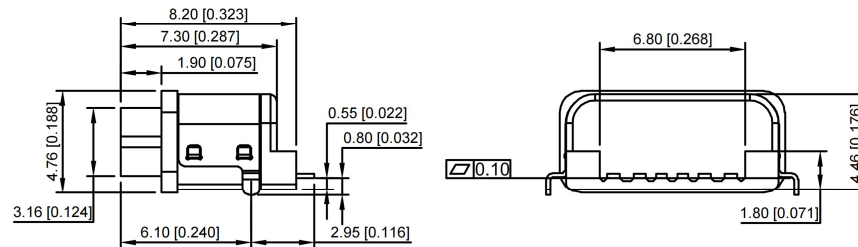

1:0.8u''
2:5u''
3:10u''

W:WHITE
B:BLACK
1:PB T
2:PA6T
3:PA9T
4:LCP

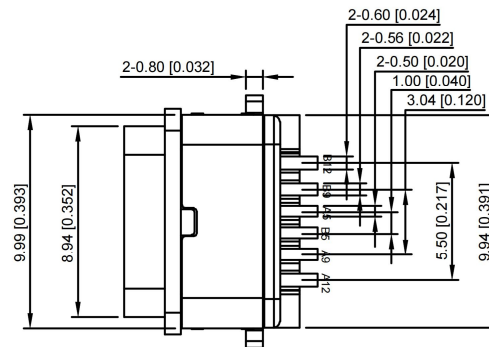

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

							DSND		SCALE: N/A	MODEL TYPE: 3.1 TYPE C		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:		
				L≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4<L≤ 16	±0.3		APPD		SIZE: A4	U262-06XN-4BF712		
				16<L≤ 63	±0.4							
				L> 63	±0.5							
REVISIONS				UNSPECIFIED TOLERANCES								
www.alpsr.com www.gdxdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD						
						WEIGHT		SHEET		REVISION		
								1/1		A0		