


Ø0.80 [Ø0.031]




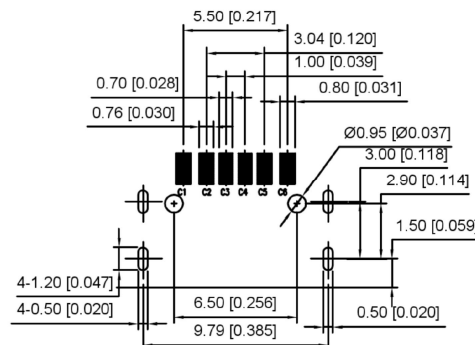


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:

SPECIFICATION 规格:


1. CURRENT RATING 额定电流: 3.0A MAX
2. VOLTAGE 电压: 100 VAC
3. TEMPERATURE RANGE 温度范围: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE 接触电阻: 40 MILLIONHM MAX
5. INSULATION RESISTANCE 绝缘电阻: 100 MEGOHMS MIN.
6. LNSERTION FORCE 插入力: 5N~20N
7. UNMATING FORCE 拔出力: 8N~20N
8. DURABILITY 工作寿命: 10,000 CYCLES
9. WATER PROOFNESS 防水: THIS PRODUCT IS BASED ON IPX7.

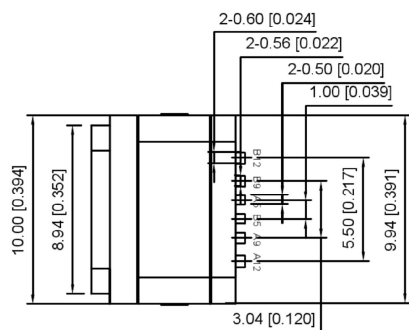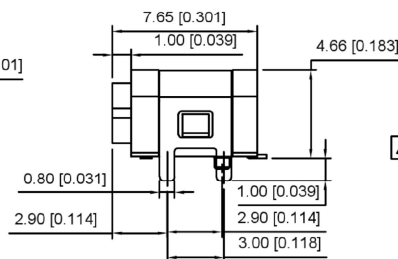

U262-06XN-4BFC10

1: 0.8u"
2: 5u"
3: 10u"

W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

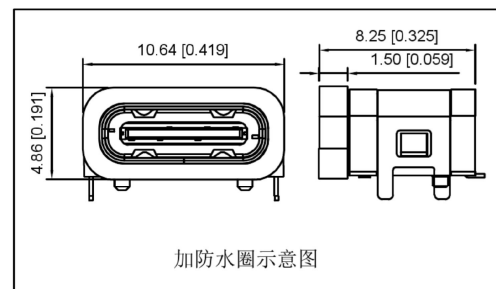

加防水圈示意图

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au/Ni Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

					DSND		SCALE: N/A	MODEL TYPE: 3.1 TYPE C	
					DWN		VIEW:	PART NO.:	
					CHKD		UNIT: mm/in	DWG NO.: U262-06XN-4BFC10	
					APPD		SIZE: A4		
REVISIONS					UNSPECIFIED TOLERANCES		WEIGHT		SHEET
www.alpsr.com www.gdxjdz.com www.xbswitch.com					DONG GUAN XI BANG ELECTRONIC CO., LTD		1/1		REVISION
									A0