
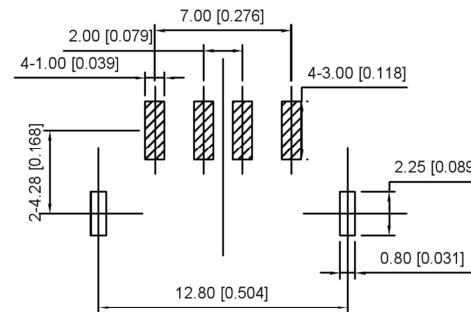
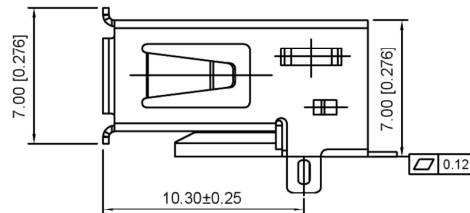
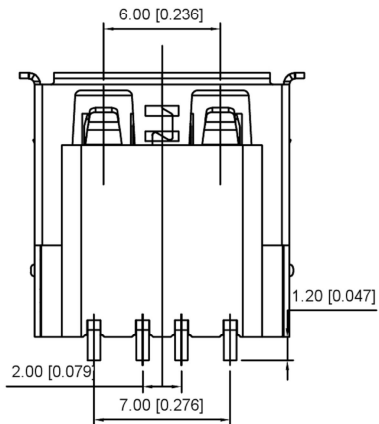
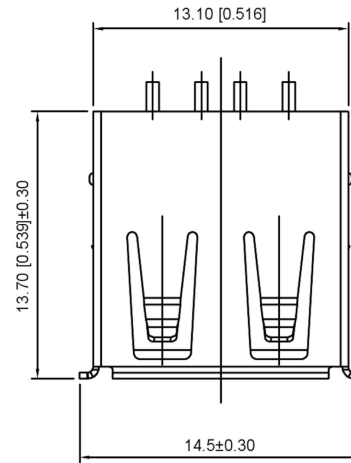



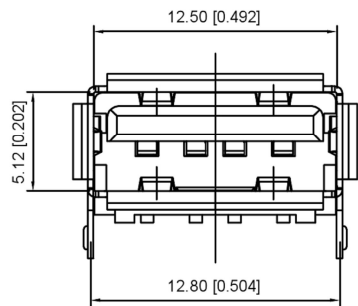

RECOMMEND P.C.B. LAYOUT

NOTES:

1.材料规格 MATERIAL SPECIFICATION:

- 1) 胶壳 HOUSING MATERIAL:BLACK LCP ROHS;
- 2) 外壳 SHELL MATERIAL:SPCC T=0.30
电镀 PLATING:NICKE;
- 3) 端子 TERMINAL: C5191 T=0.25
电镀 PLATING:SEMI GOLD TIN G/F;

2.电气特性 ELECTRICAL CHARACTERISTIC:

- 1) 绝缘电阻 INSULATION RESISTANCE: 1000MΩ MIN;
- 2) 接触电阻 CONTACT RESISTANCE: 30mΩ MAX;
- 3) 耐压 WITHSTANDING VOLTAGE: 500V AC;

3.机器特性 MECHANICAL CHARACTERISTICS:

- 1) 插入力 INSERTION FORCE:3.57Kgf Max;
- 2) 拔出力 EXTRACTION FORCE:1.02Kgf Min;

							DSND		SCALE: N/A	MODEL TYPE: USB 2.0			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: U221-04XN-4BVS70-S1			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.: U221-04XN-4BVS70-S1			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
				L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0