

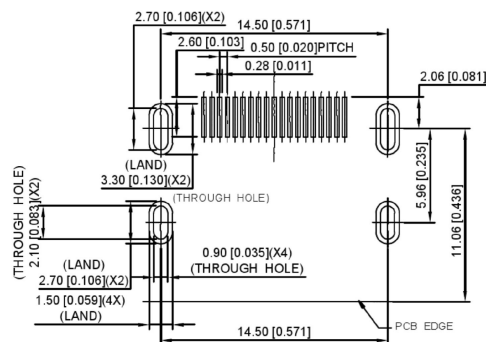
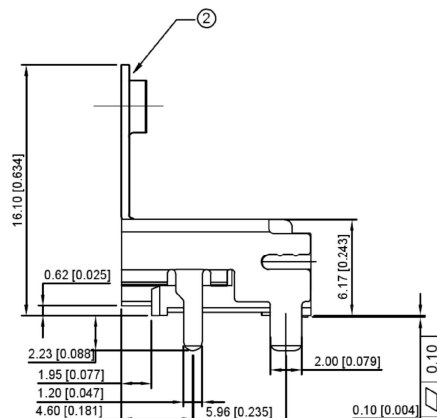
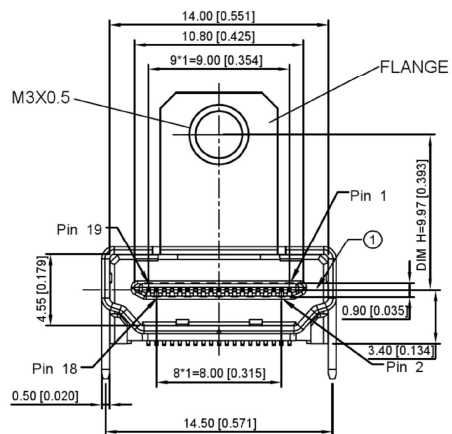


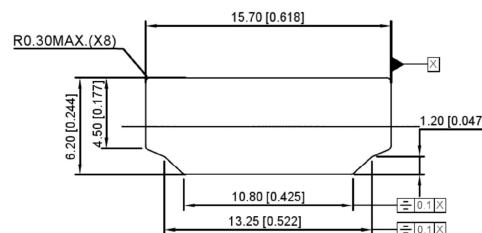

RECOMMENDED P.C.B LAYOUT (T:1.20mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



1. OPERATING CURRENT: 0.5A MAX.
2. OPERATION TEMPERATURE: -25°C TO +85°C
3. DIELECTRIC WITHSTANDING VOLTAGE:
500Volts AC BETWEEN ADJACENT TERMINAL (UNMATED)
300Volts AC BETWEEN ADJACENT TERMINAL (MATED)
4. INSULATION RESISTANCE:
100Mohm MIN (UNMATED); 10Mohm MIN. (MATED)
5. HDMI SPECIFICATION COMPLIANCE

A71-05H3-1X1N1

1: Au 1U'' -
5: Au 15U''
6: Au 30U''

3	CONTACTS	19	COPPER ALLOY,GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN.TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	COPPER ALLOY, NICKEL PLATED

								DSND		SCALE: N/A	MODEL TYPE: HDMI CONNECTOR			
								DWN		VIEW: 	PART NO.: A71-05H3-1X1N1			
								CHKD		UNIT: mm/in	DWG NO.: A71-05H3-1X1N1			
								APPD		SIZE: A4				
REVISIONS						UNSPECIFIED TOLERANCES				DONG GUAN XI BANG ELECTRONIC CO., LTD		WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0	