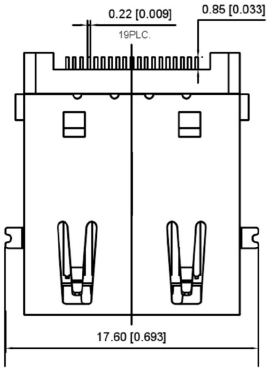

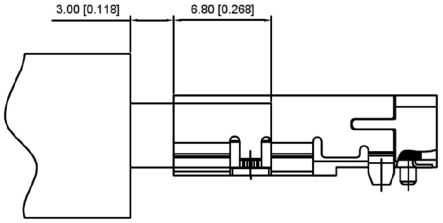

NOTE:

1.MATERIAL:

HOUSING: THERMOPLASTIC HIGH TEMP WITH 40% GF, UL94V-0.

CONTACT: BRASS T=0.20mm

SHELL: STAINLESS T=0.50mm

2.FINISH:

CONTACT: GOLD PLATING ON CONTACT AREA,

MATTE TIN PLATING ON SOLDERTAILS

100u" MIN. NICKEL UNDERPLATING OVERALL.

SHELL: 50~90u"NICKEL PLATING OVERALL.

3.▼MAJOR DIMENSION ▽ CRITICAL DIMENSION

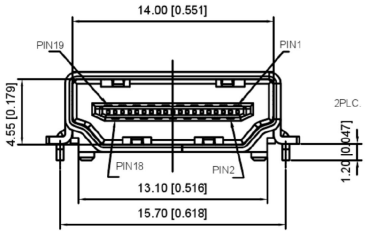

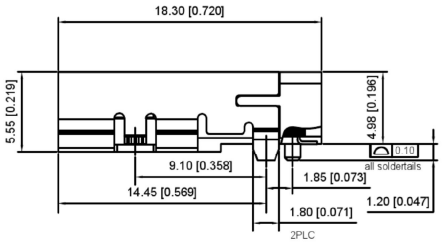

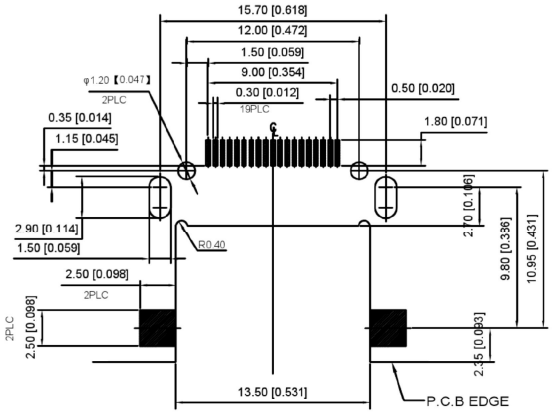

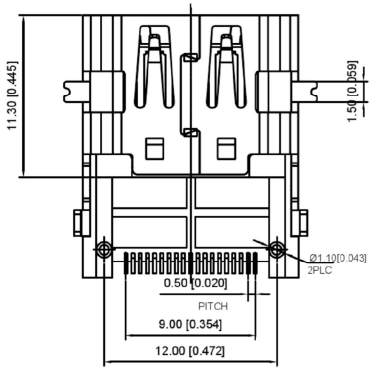



RECOMMENDED P.C.B LAYOUT(THICKNESS=1.2mm)

(COMPONENT SIDE)TOLERANCES±0.05mm

A71-05H7-1X1N1

1:AU 1U"

5:AU 15U"

6:AU 30U"

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	

www.alpsr.com www.gdxjdz.com www.xbswitch.com

DSND		SCALE: N/A	MODEL TYPE: HDMI CONNECTOR
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.: A71-05H7-1X1N1
APPD		SIZE: A4	

DONG GUAN XI BANG ELECTRONIC CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0