

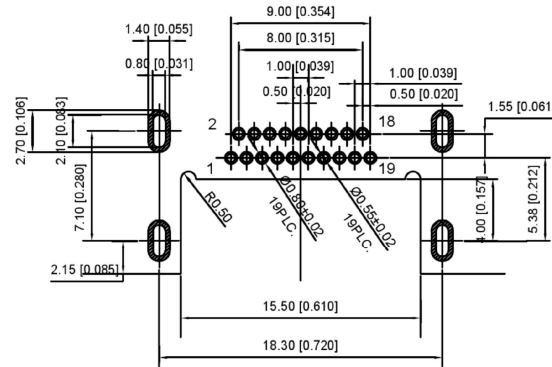
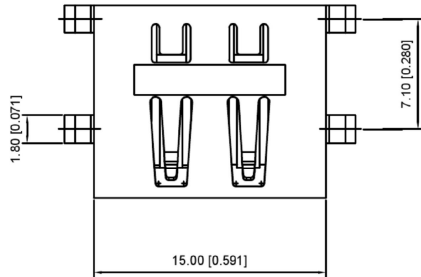
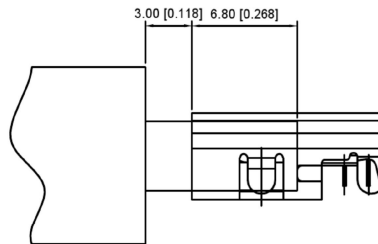
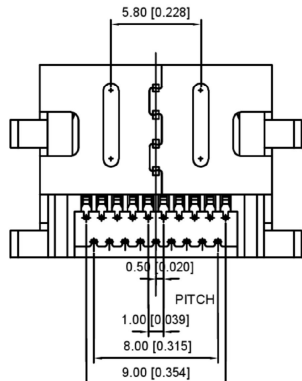
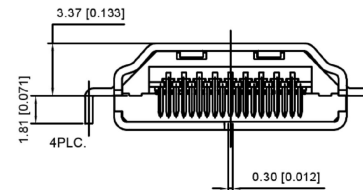


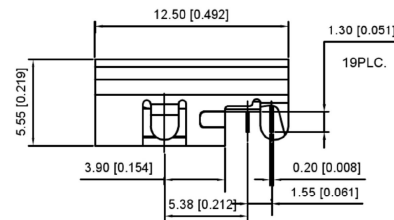

RECOMMENDED P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCES $\pm 0.05\text{mm}$

NOTE:
1. MATERIAL:
HOUSING: THERMOPLASTIC HIGH TEMP WITH 30% GF, UL94V-0.
CONTACT: BRASS T=0.20mm
SHELL: BRASS T=0.50mm
MYLAR: KAPTON TAPE
2. FINISH:
CONTACT: GOLD PLATING ON CONTACT AREA,
MATTE MATTE TIN PLATING ON SOLDER TAILS
100u" MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 40u" MIN. NICKEL PLATING OVERALL.

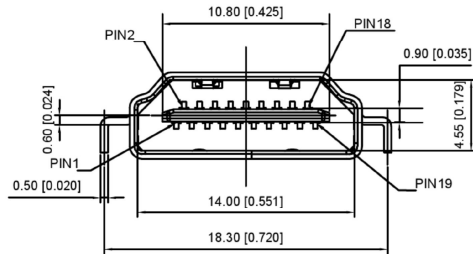

A71-05H8-1X1N1

1:AU 1U"
5:AU 15U"
6:AU 30U"

							DSND		SCALE: N/A	MODEL TYPE: HDMI CONNECTOR		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.:		
				L≤ 4	±0.2							
				4<L≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16<L≤ 63	±0.4					A71-05H8-1X1N1		
				L> 63	±0.5	APPD		SIZE: A4				
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0