
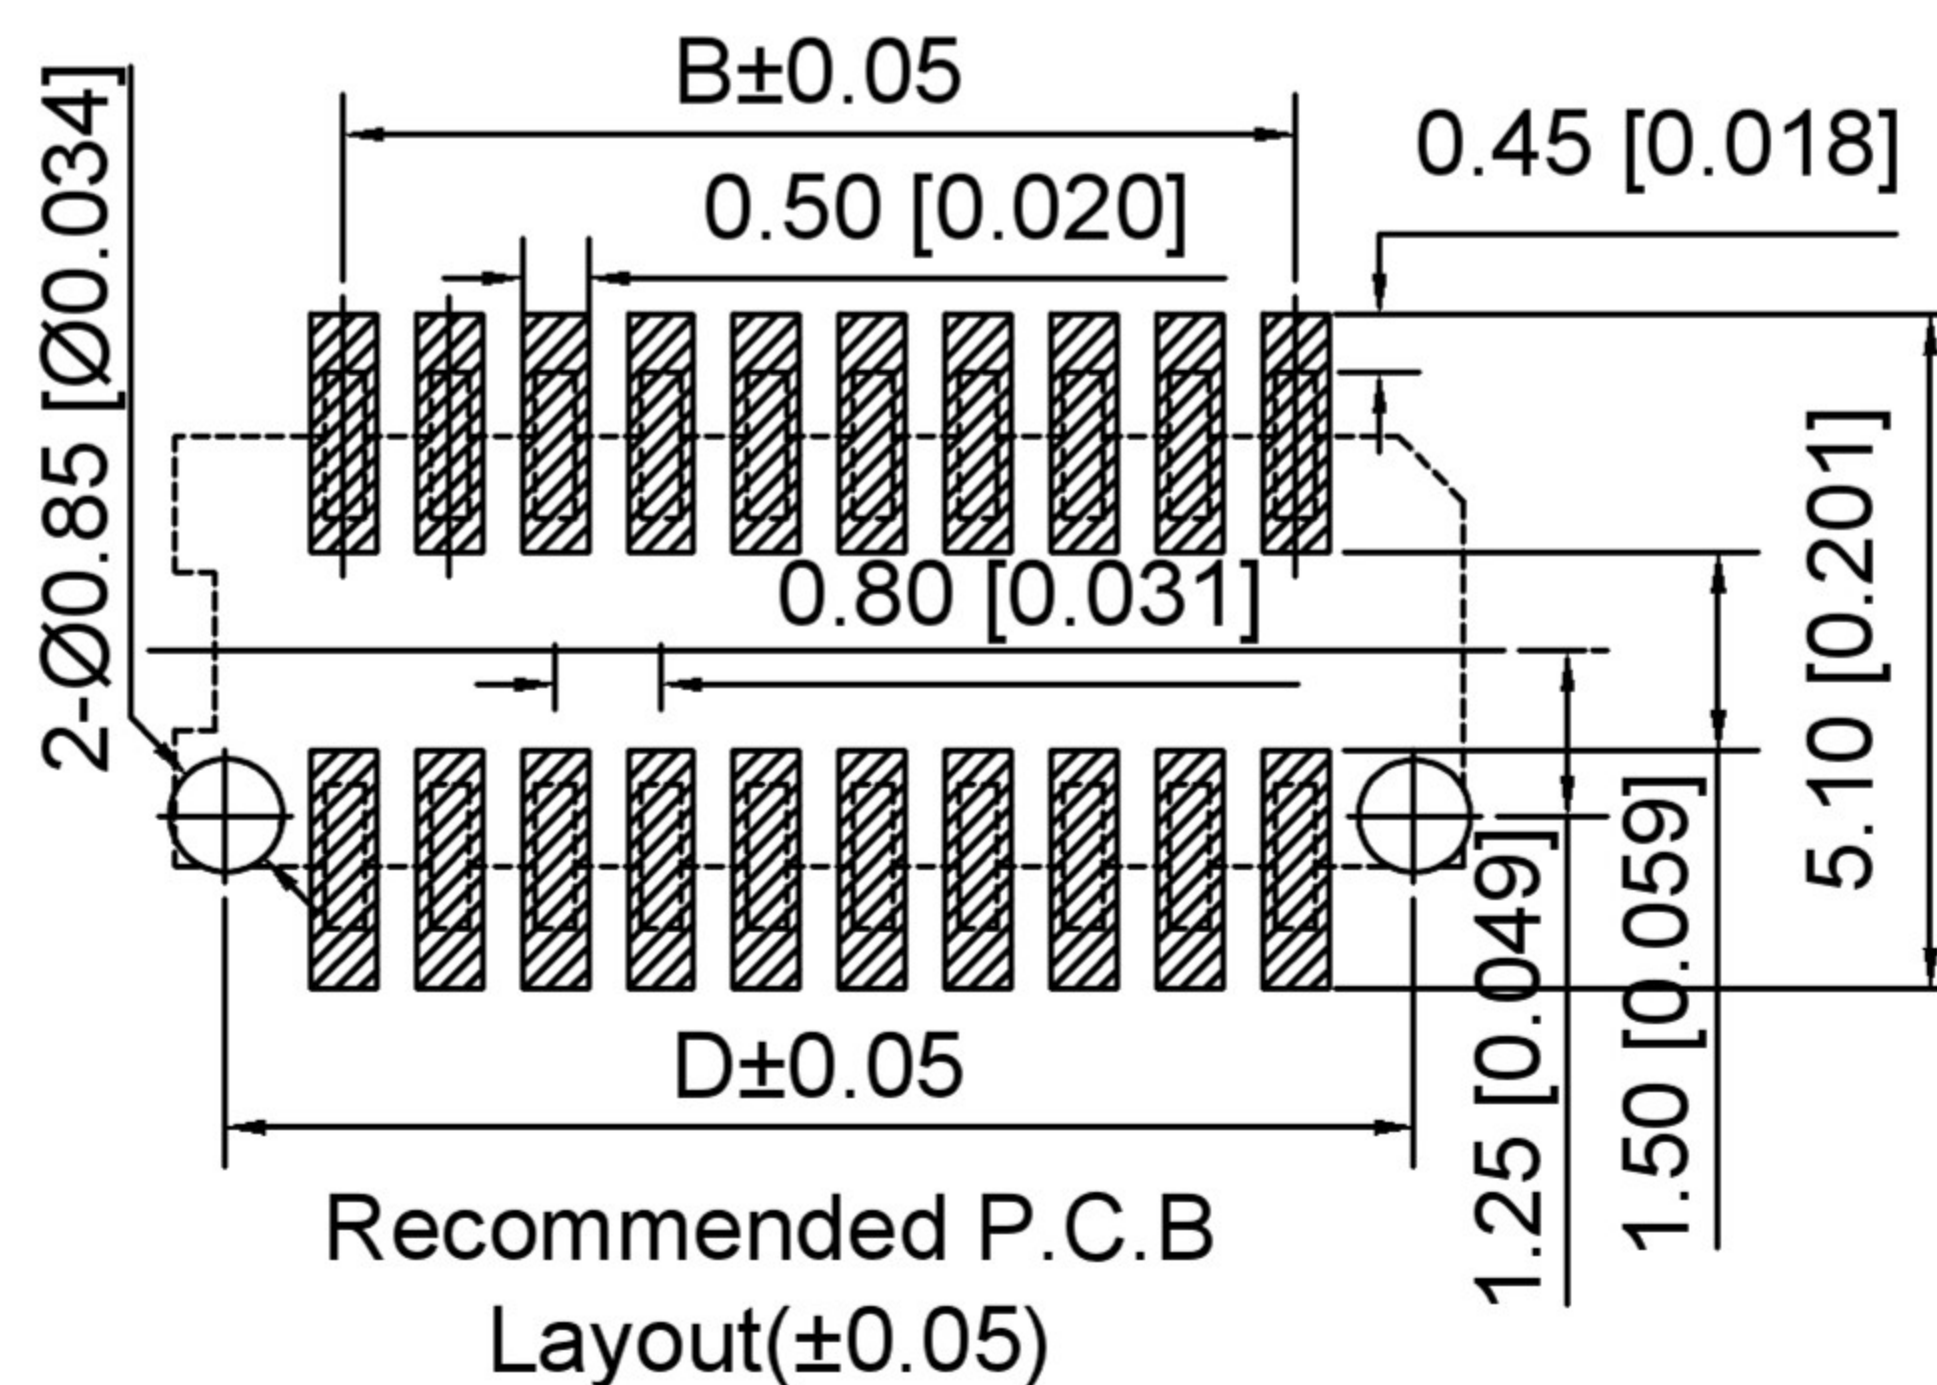
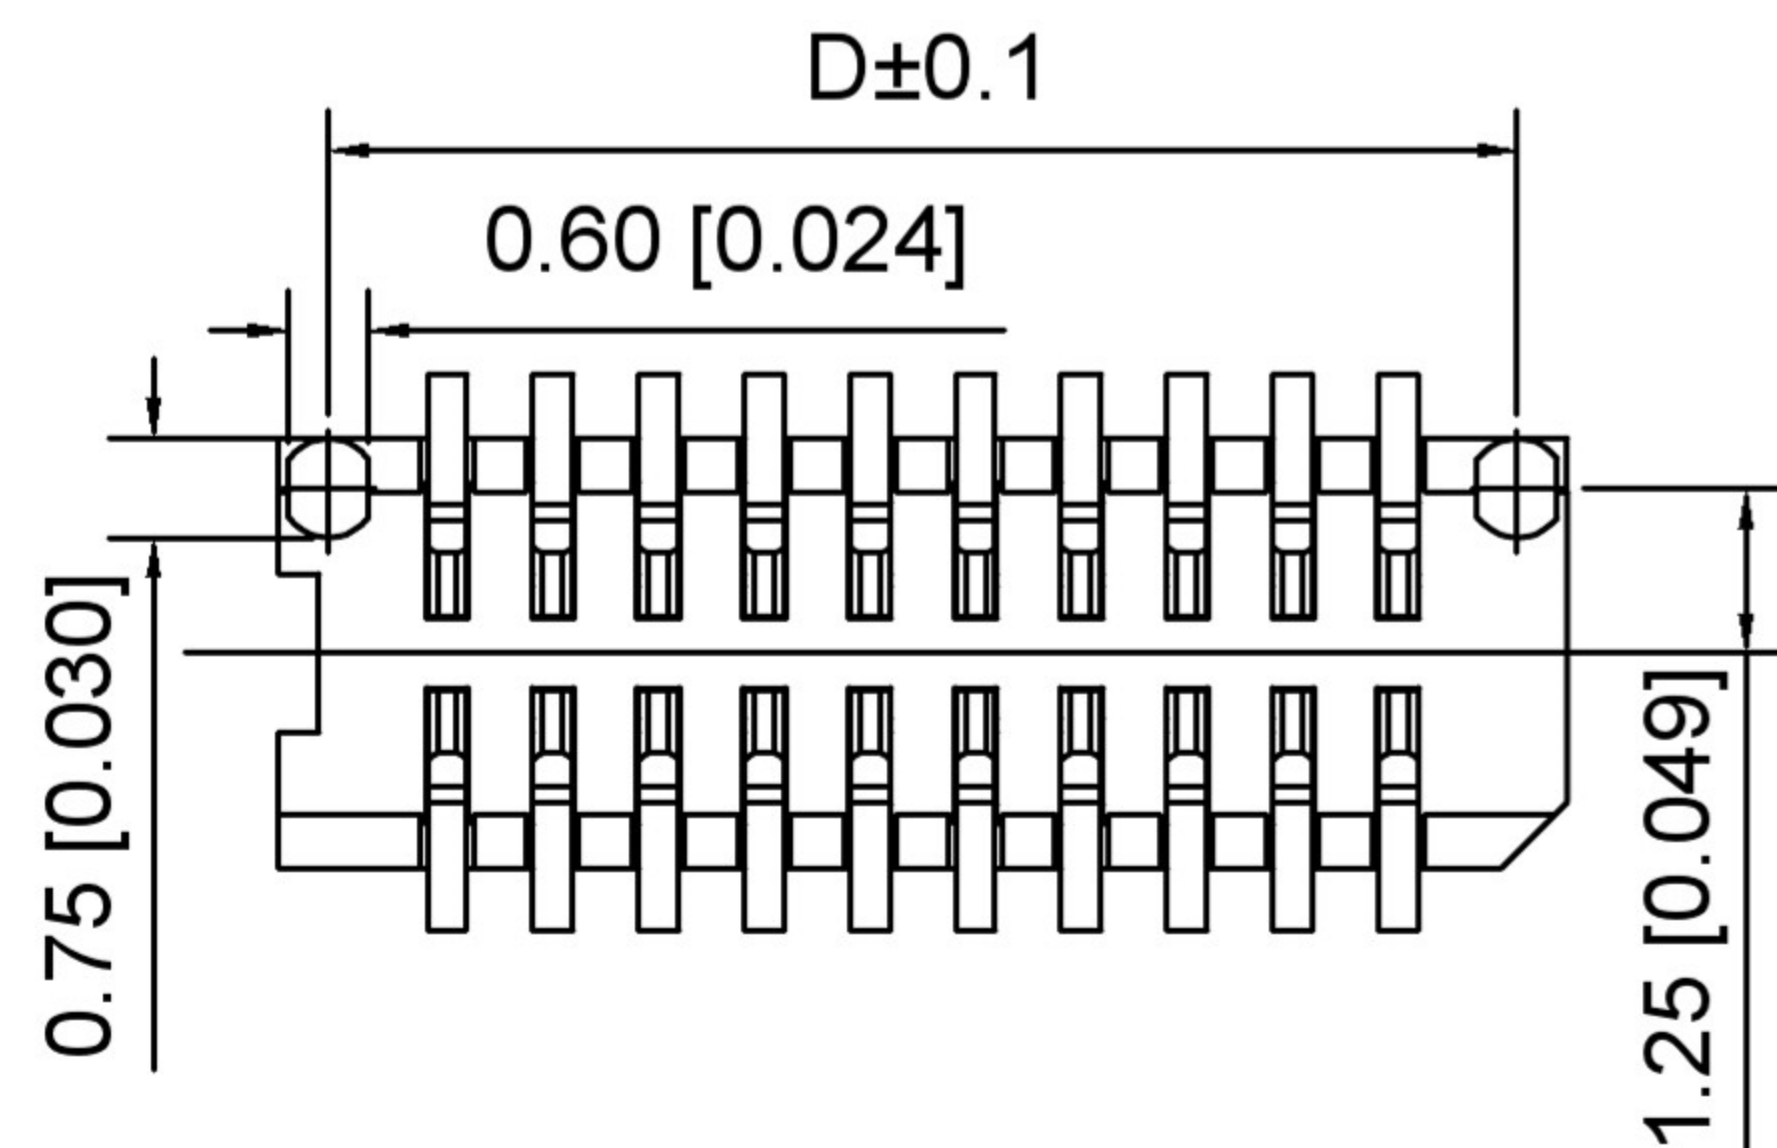
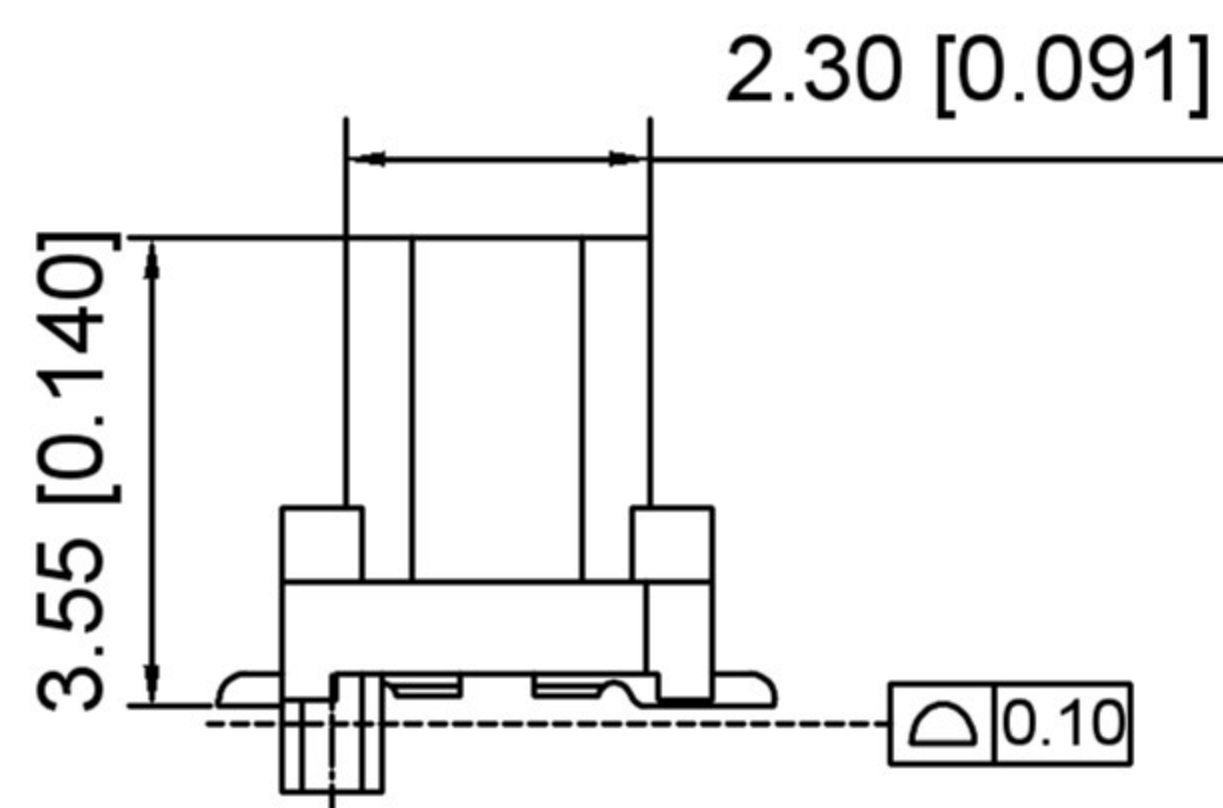
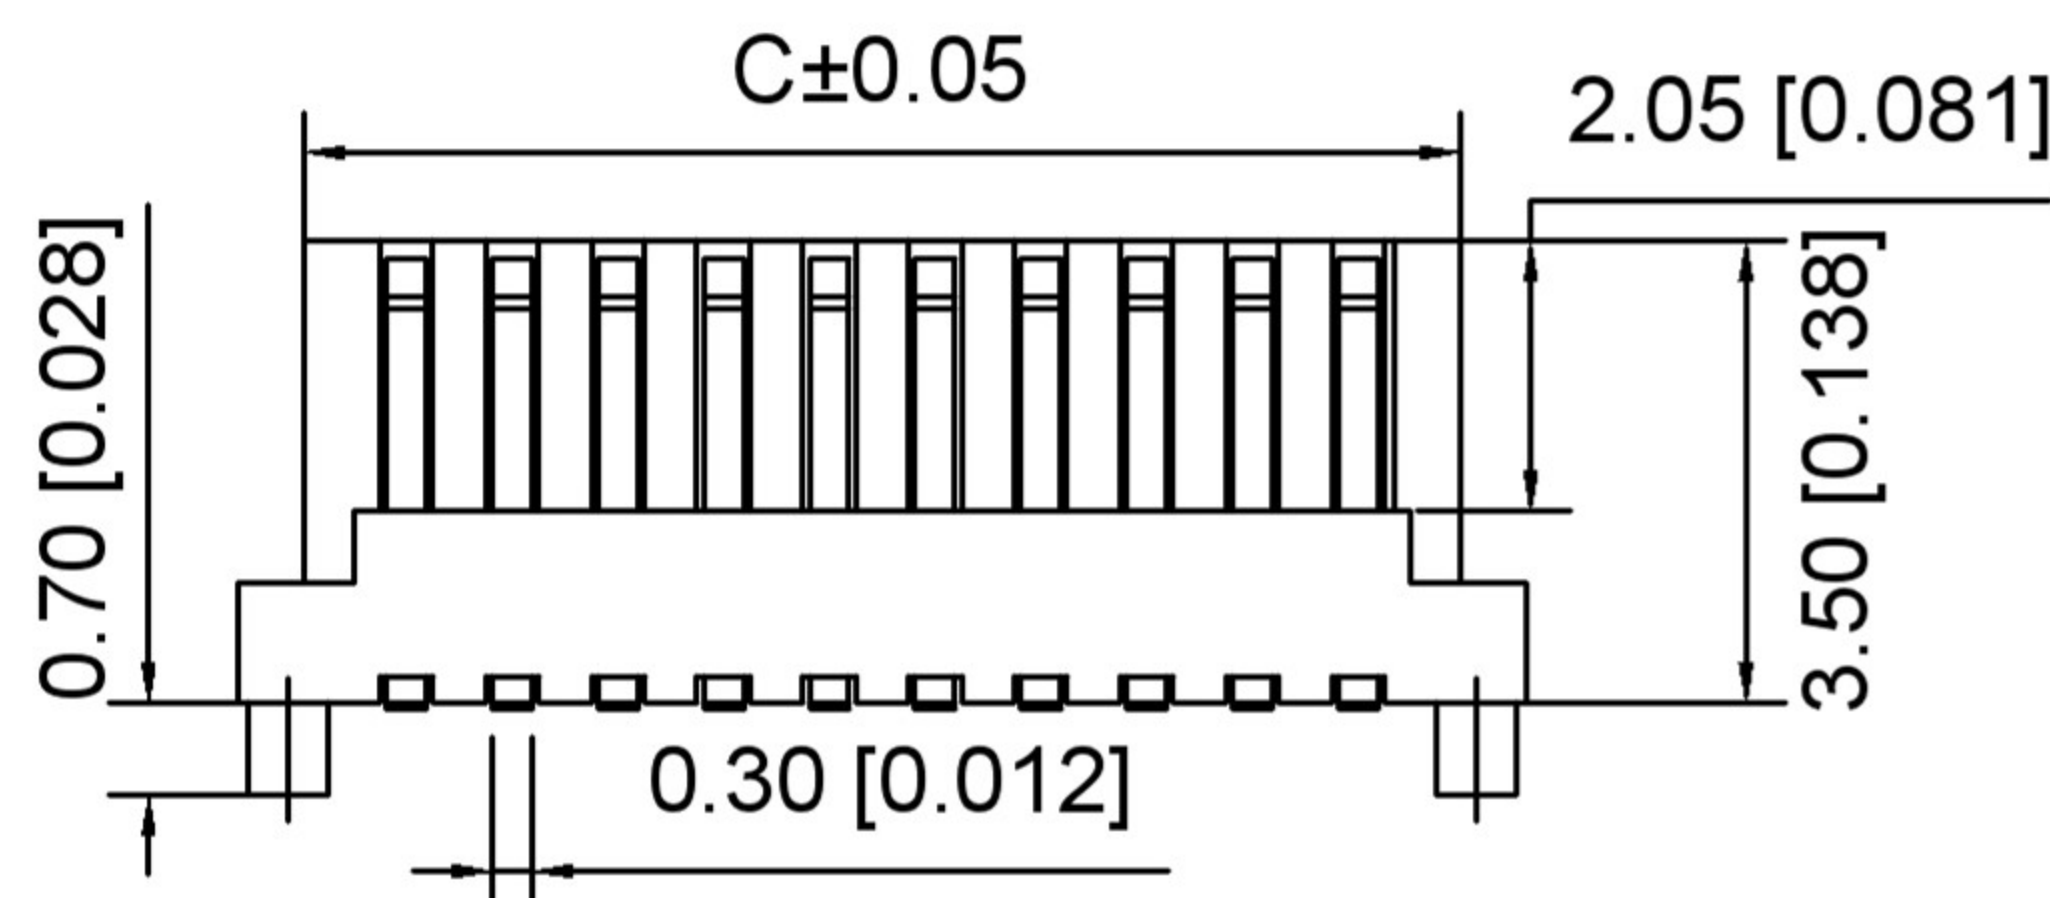
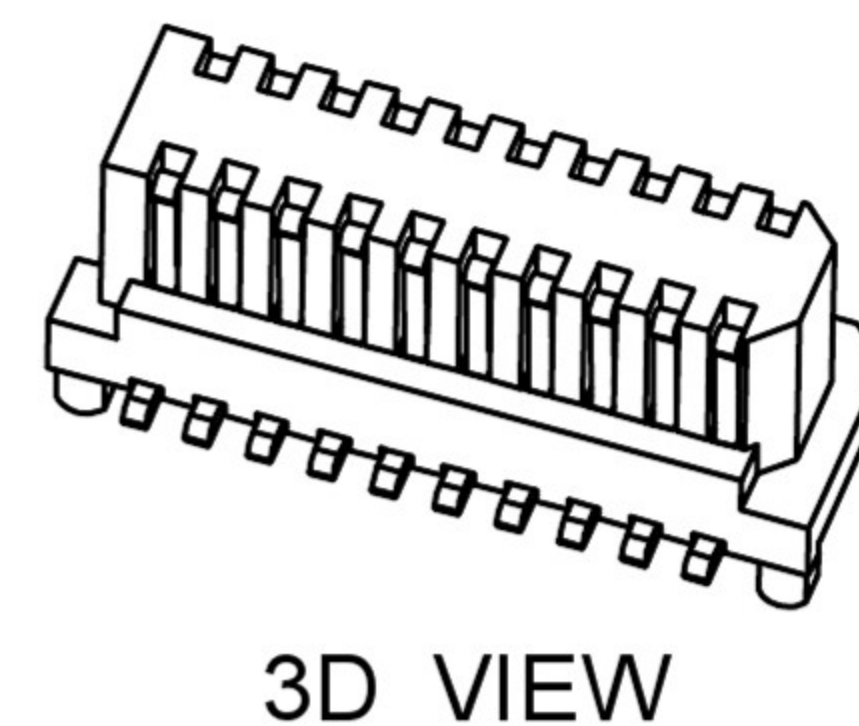
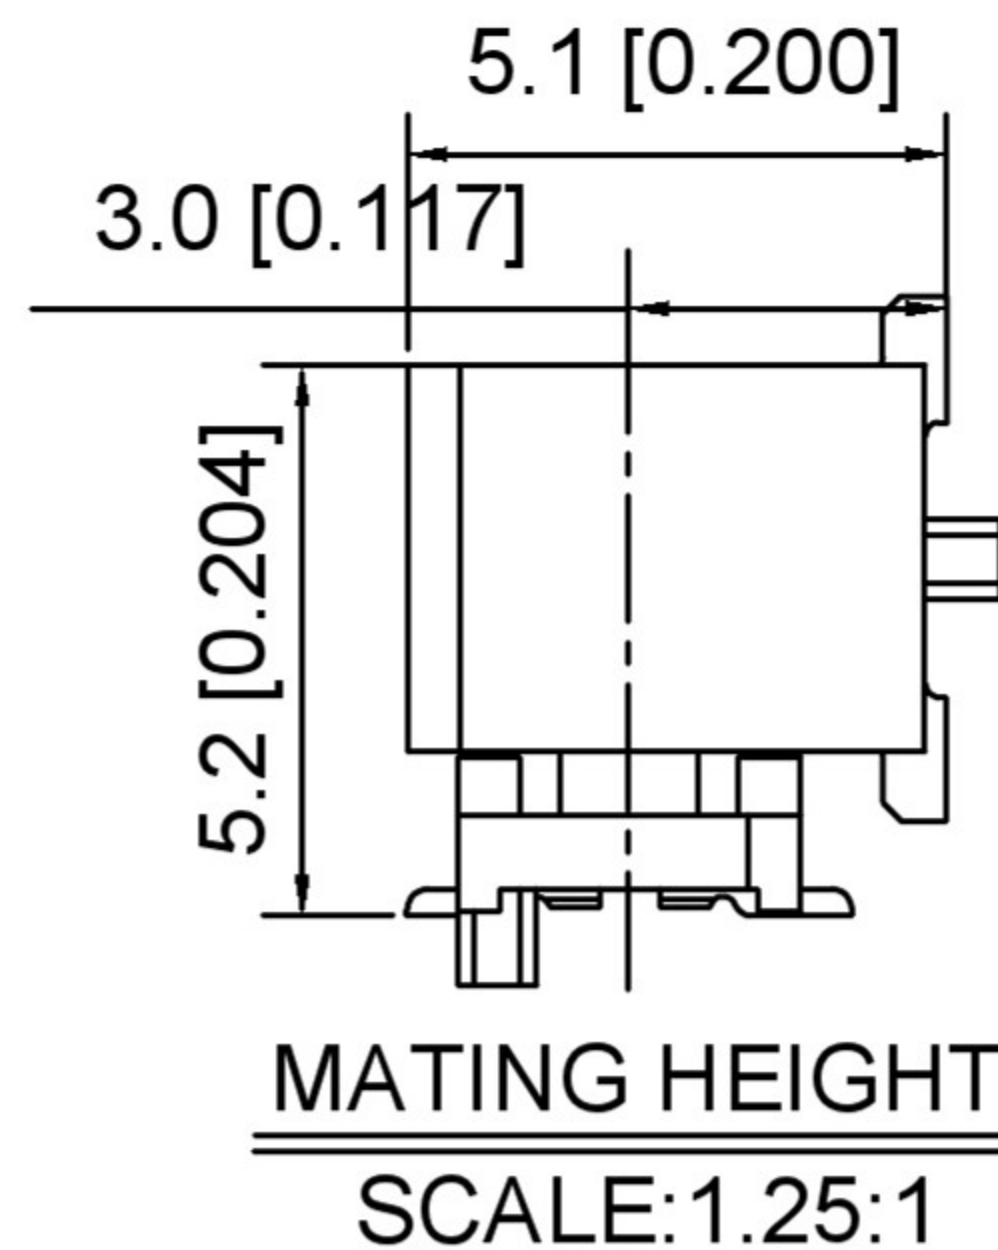


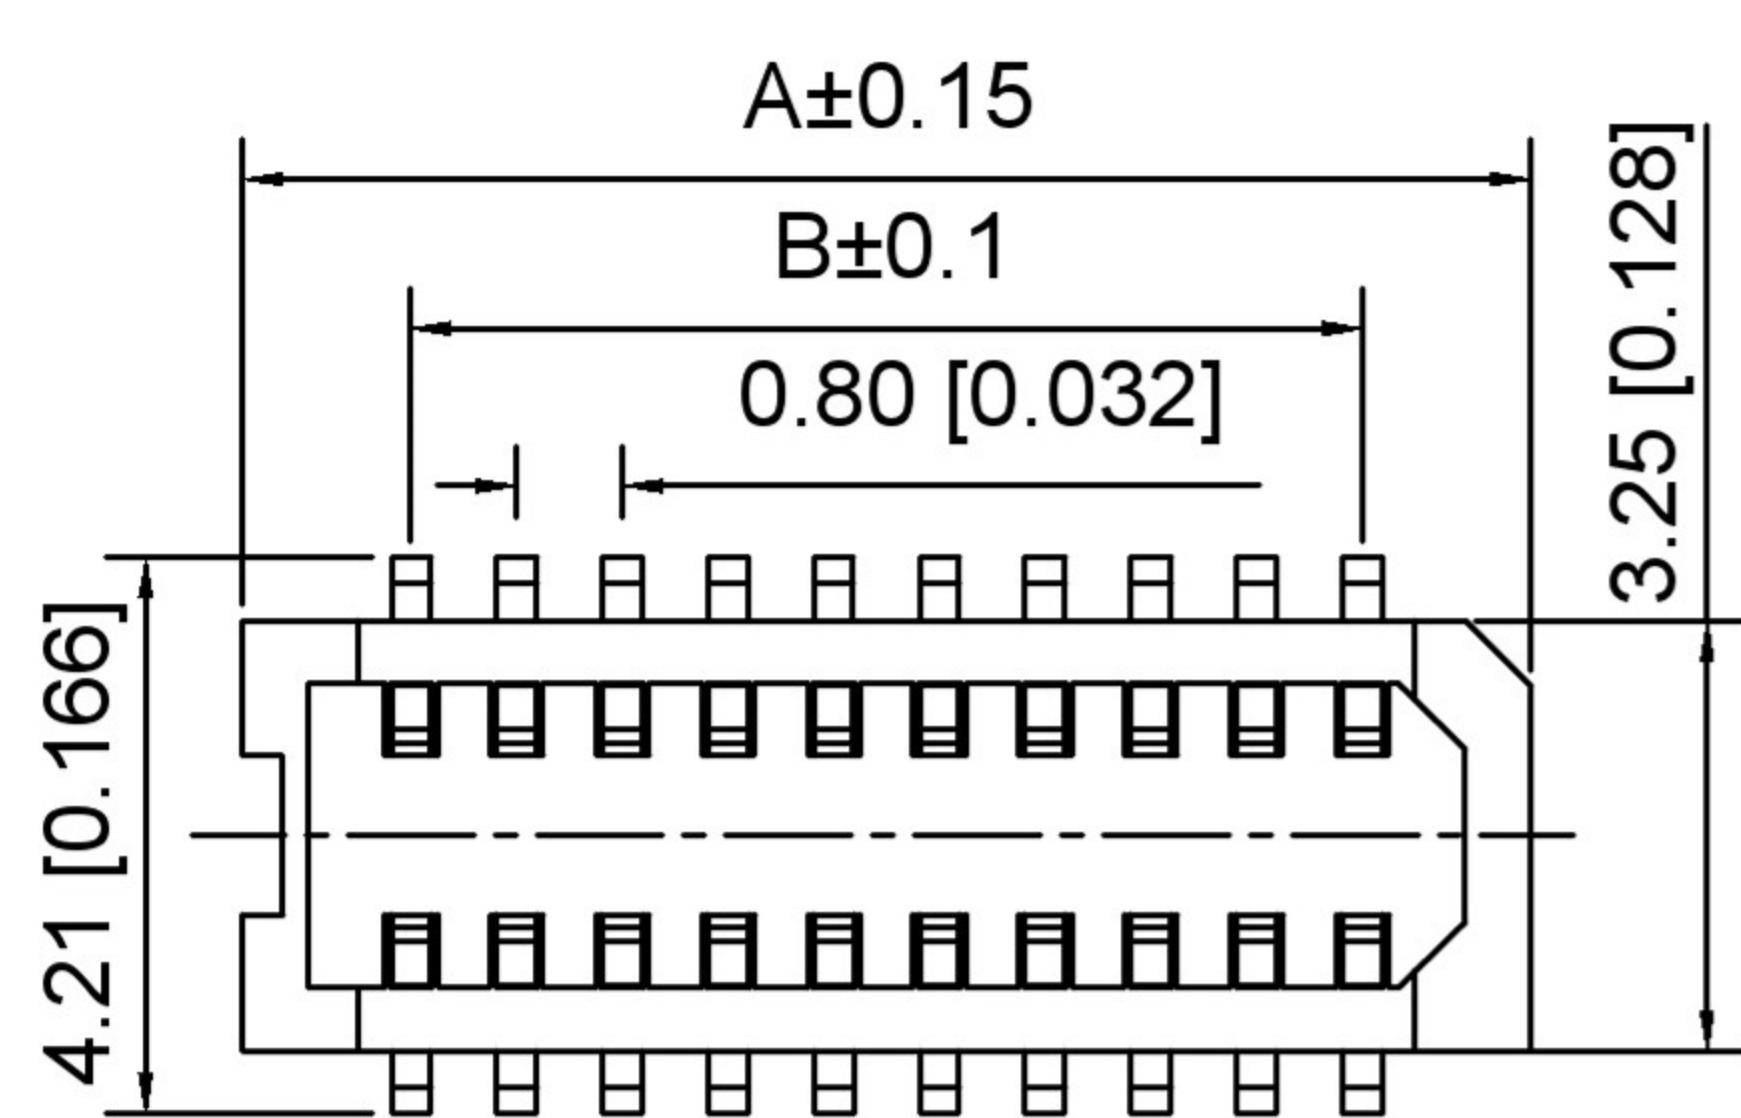

Specifications:

规格:

Voltage rating:50V AC/DC

额定电压: 50V AC/DC

Current rating:0.5A AC/DC

额定电流: 0.5A AC/DC

Withstanding voltage:200V AC/minute

耐受电压: 200V AC/分钟

Temperature range:-40℃-+85℃

温度范围: -40℃-+85℃

Insulation resistance: 100MΩ min

绝缘电阻: 100MΩ Min

Contact resistance:50mΩ Max

接触电阻: 50mΩ Max

X0801 W V S-XX X S-9T V01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

1.Series No

2.Category:W-Wafer

3.Welding Board Angle:V-Straight 180°

4.Welading Way:S-SMT

5.Row No.Pin No:XX-04-52P

6.Height:A=3.5mm

7.Special No:S-With positioning Columnm

8.Material:9T-PA9T UL 94V-0

9.Plating:V01-Gold Flash

Poles	Dimensions			
	A	B	C	D
4	3.35	0.80	2.34	2.60
6	4.15	1.60	3.15	3.40
8	4.95	2.40	3.95	4.20
10	5.75	3.20	4.75	5.00
12	6.55	4.00	5.55	5.80
14	7.35	4.80	6.35	6.60
16	8.15	5.60	7.15	7.40
18	8.95	6.40	7.95	8.20
20	9.75	7.20	8.75	9.00
22	10.55	8.00	9.55	9.80
24	11.35	8.80	10.35	10.60
26	12.15	9.60	11.15	11.40
28	12.95	10.40	11.95	12.20
30	13.75	11.20	12.75	13.00
32	14.55	12.00	13.55	13.80
34	15.35	12.80	14.35	14.60
36	16.15	13.60	15.15	15.40
38	16.95	14.40	15.95	16.20
40	17.75	15.20	16.75	17.00
42	18.55	16.00	17.55	17.80
44	19.35	16.80	18.35	18.60
46	20.15	17.60	19.15	19.40
48	20.95	18.40	19.95	20.20
50	21.75	19.20	20.75	21.00
52	22.55	20.00	21.55	21.80

X0801WVS-XXXS-9TV01	PA9T	Phosphor Bronze	X0801F
PART NO	Material	Material(Pin)	Suitable Female



DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR
DWN		VIEW:	PART NO.: XB-X0801_1
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					
	DATE	REVISED	APPROVED		






DONG GUAN XI BANG ELECTRONIC CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0

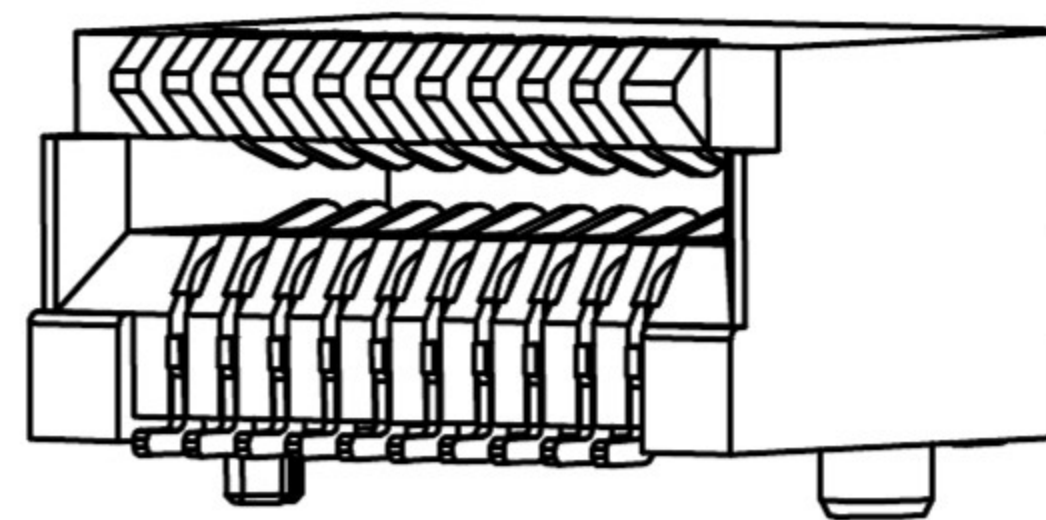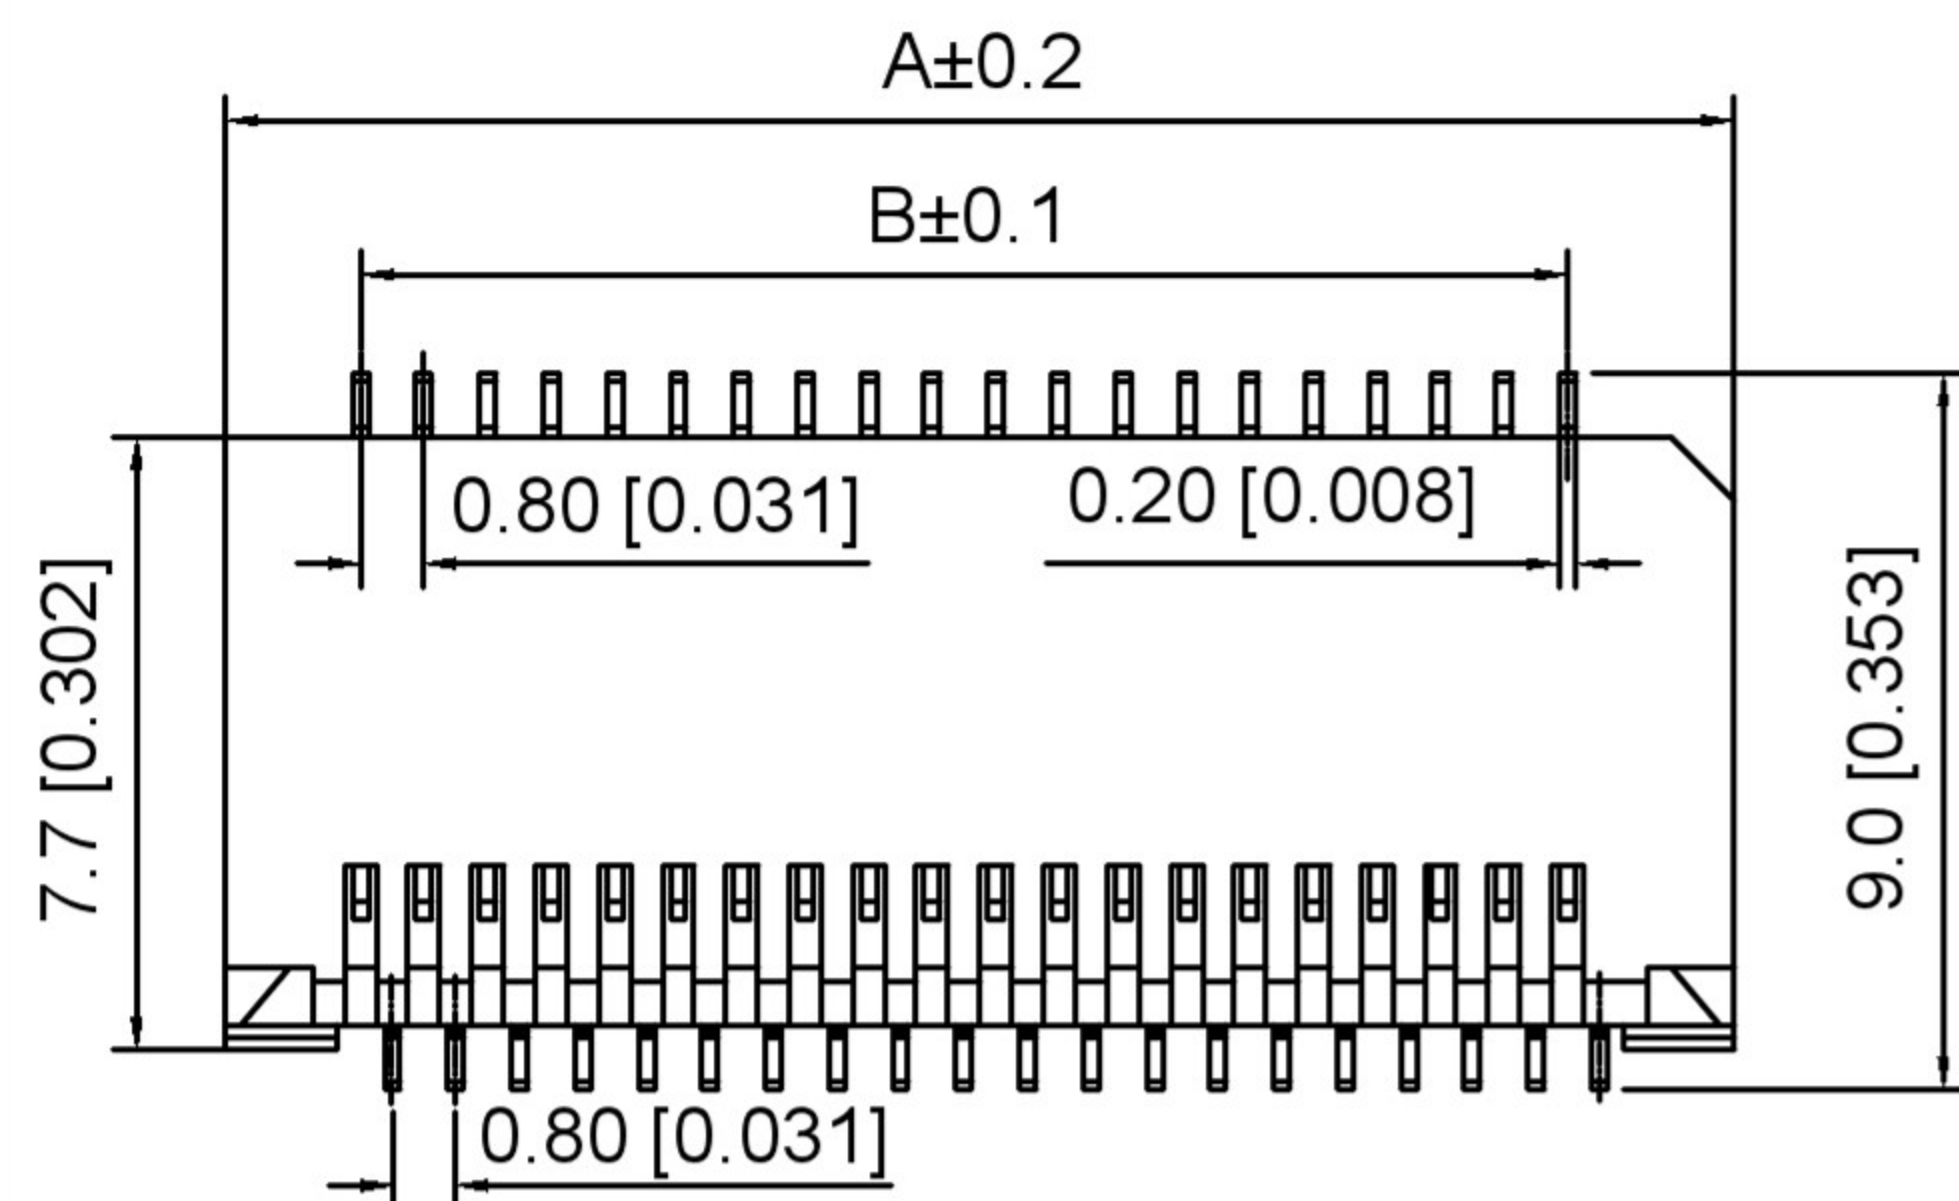

3D VIEW

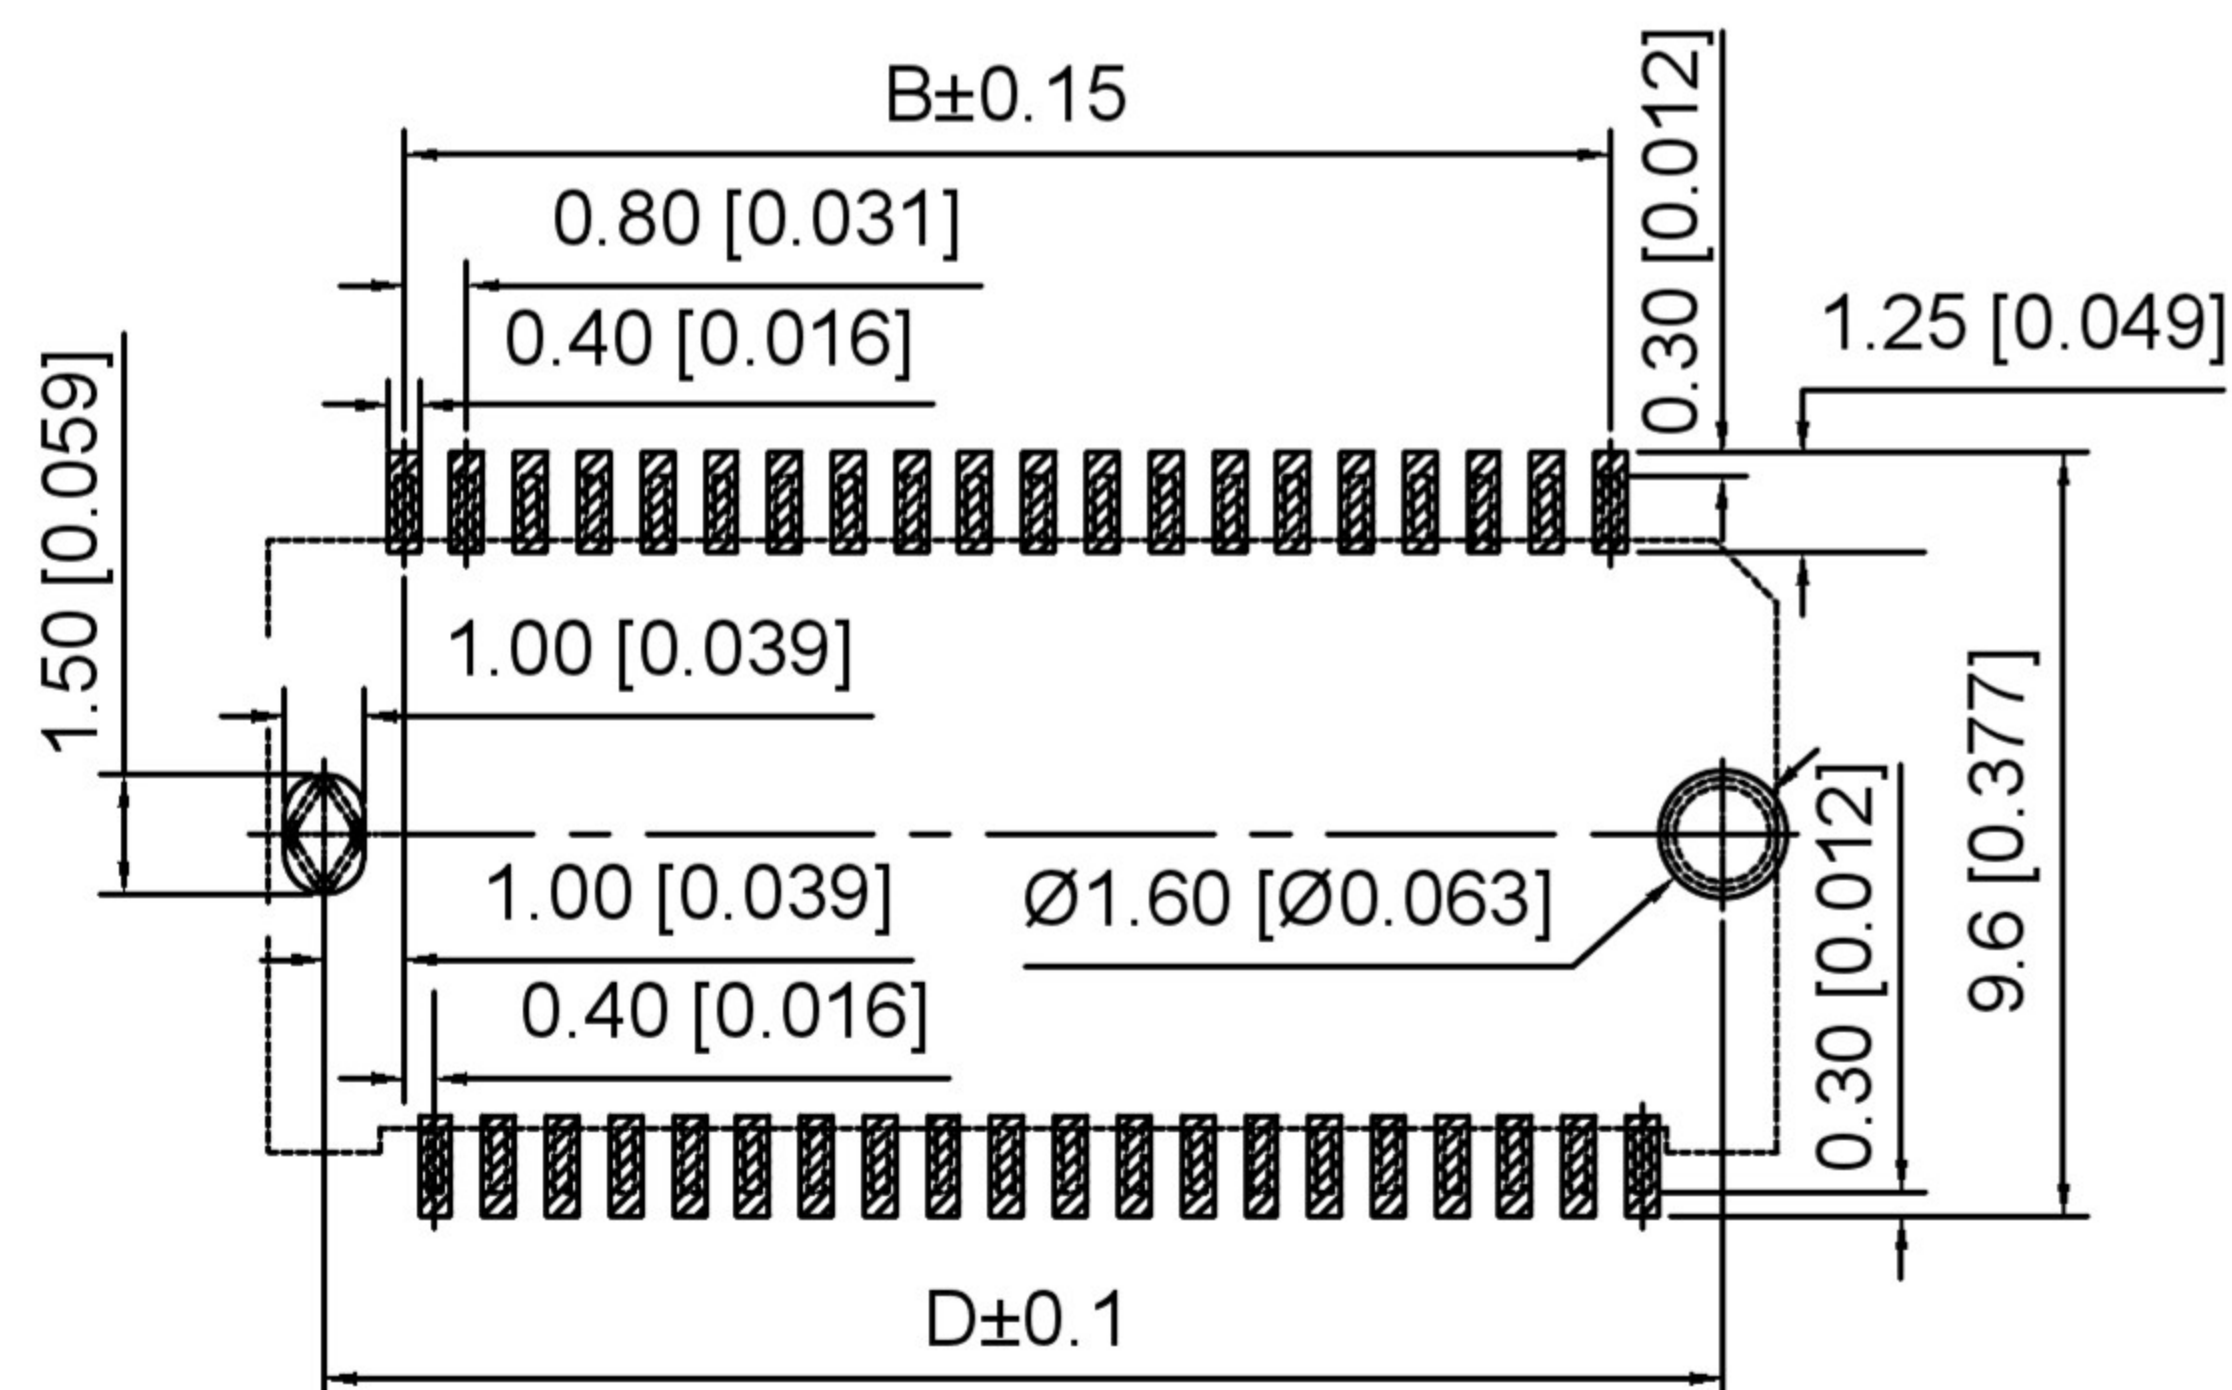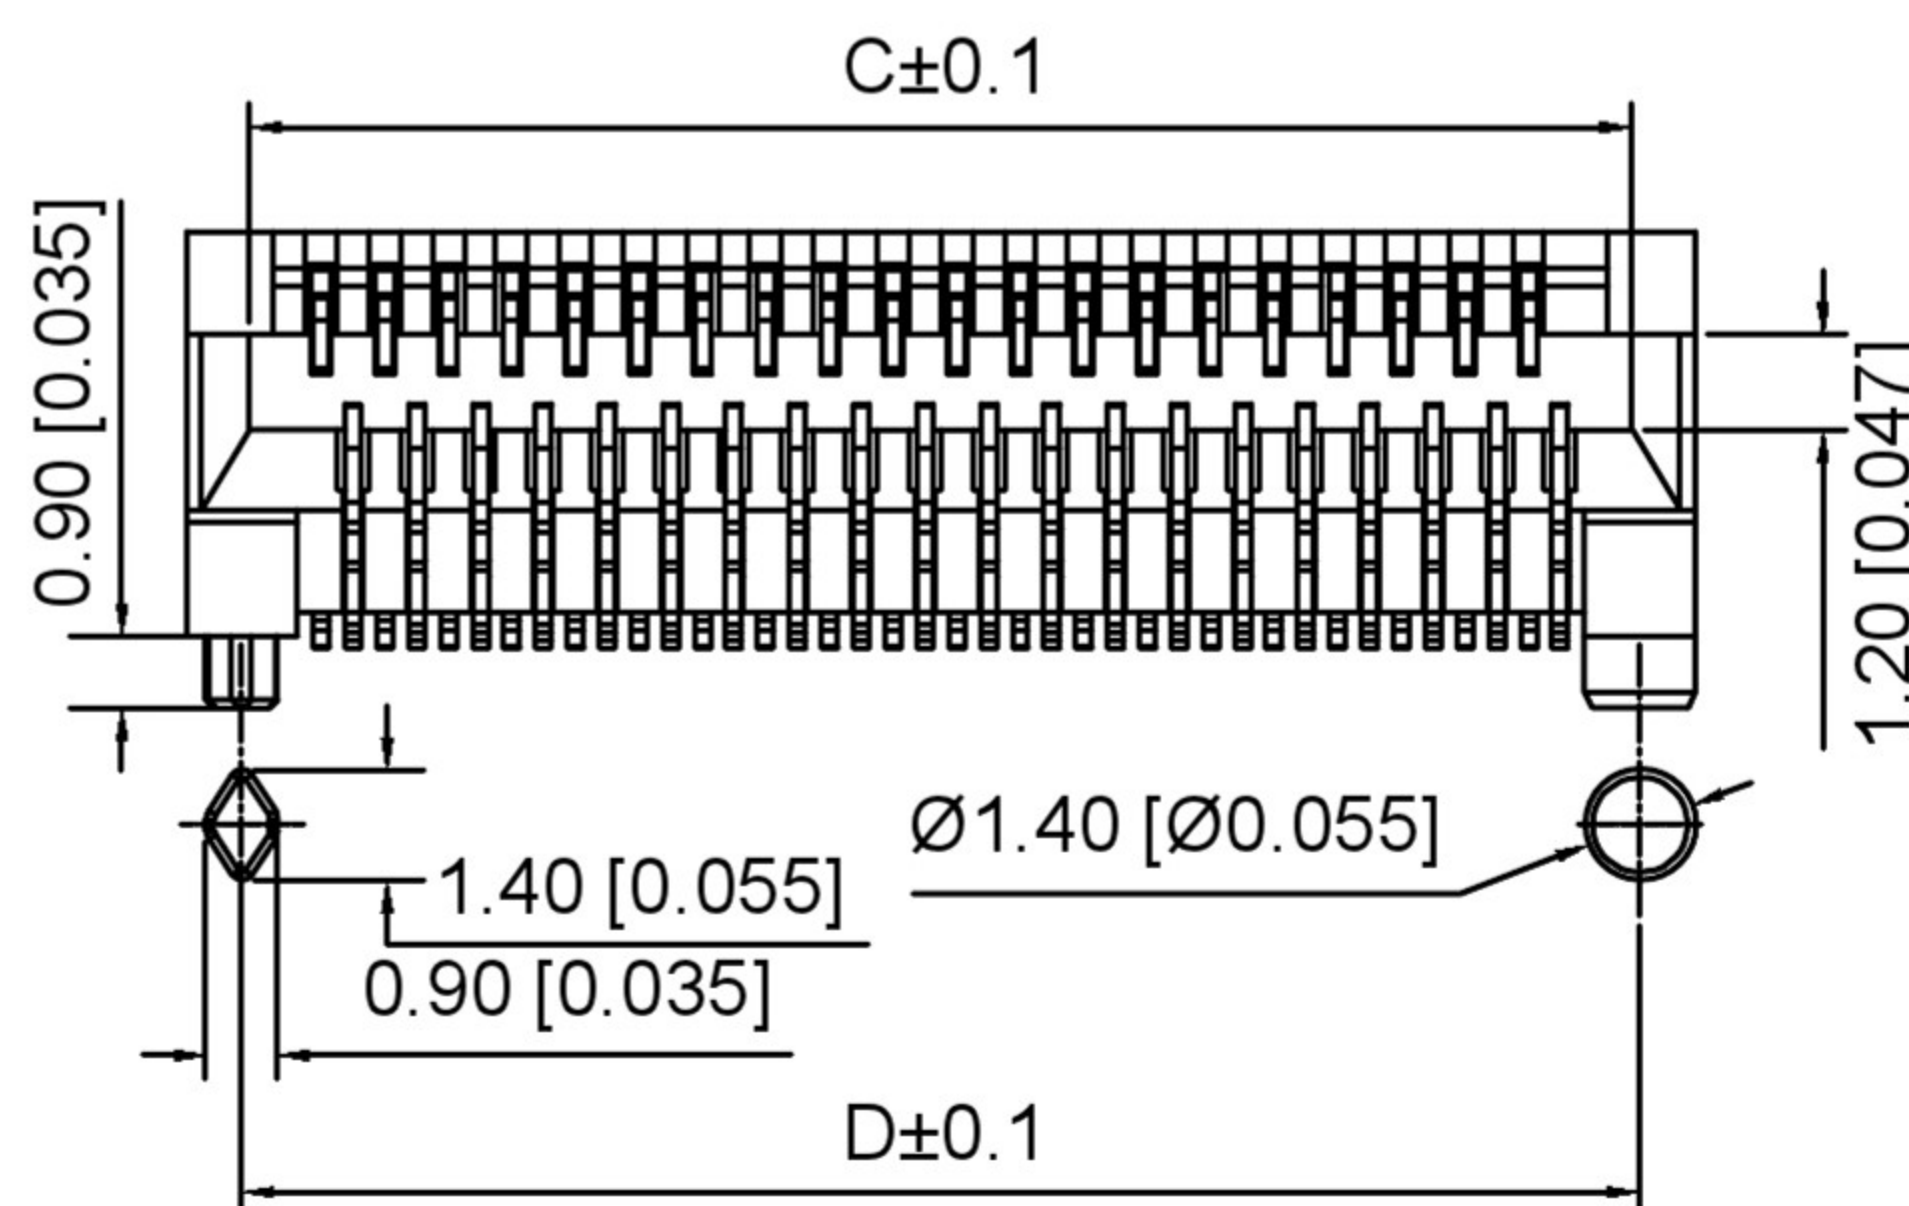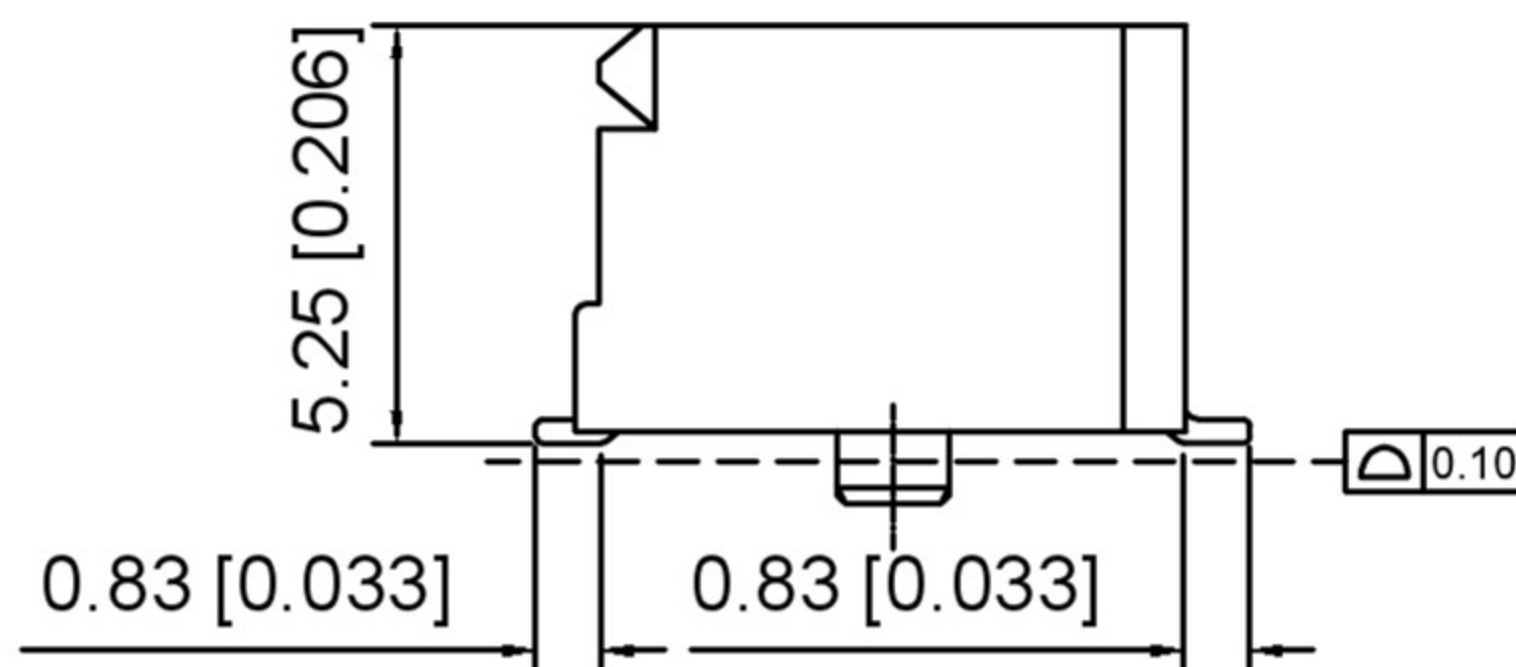

Recommended PCB Layout

Specifications:

规格:

Voltage rating:50V AC/DC

额定电压: 50V AC/DC

Current rating:0.5A AC/DC

额定电流: 0.5A AC/DC

Withstanding voltage:200V AC/minute

耐受电压: 200V AC/分钟

Temperature range:-40℃-+85℃

温度范围: -40℃-+85℃

Insulation resistance:100MΩ min

绝缘电阻: 100MΩ Min

Contact resistance:50mΩ Max

接触电阻: 50mΩ Max

X0801 F R S-XX X S-LP V01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:R-Straight 90°
- 4.Welading Way:S-SMT
- 5.Row No.Pin No:XX-10-100P
- 6.Female Height:A=5.25 ,
- 7.Special No:S-With positioning Columm
- 8.Material:LP-LCP UL 94V-0 Black
- 9.Plating:V01-Gold Flash

Poles	Dimensions			
	A	B	C	D
10	7.00	3.20	5.40	5.60
20	11.00	7.20	9.40	9.60
30	15.00	11.20	13.40	13.60
40	19.00	15.20	17.40	17.60
50	23.00	19.20	21.40	21.60
60	27.00	23.20	25.40	25.60
70	31.00	27.20	29.40	29.60
80	35.00	31.20	33.40	33.60
100	43.00	39.20	41.40	41.60

X0801FRS-XXXS-LPV01	LCP	Phosphor Bronze	X0801W
PART NO	Material	Material(Pin)	Suitable Wafer

DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR
DWN		VIEW:	PART NO.: XB-X0801_2
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISION	A0

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD