


— 产品尺寸 —

Unit=mm

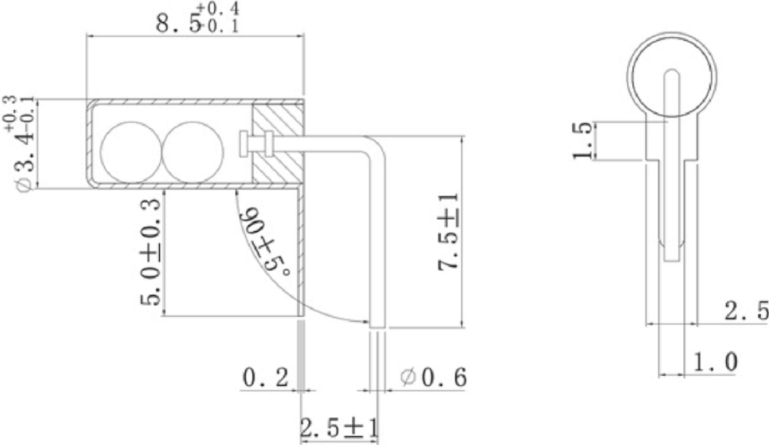

功能 Function

- 01.水平倾斜检测
- 02.垂直翻转检测


应用产品 Applications

- 01.数码相框旋转
- 02.自动化装置
- 03.家用电器



— 焊接特性 —

- 01 手工焊：330℃ ± 10℃, 2-3秒。
- 02 波峰焊接：250℃ ± 10℃, 3-5秒。
- 03 焊锡：含锡量100%。
- 04 不可使用强酸、碱性助焊剂。

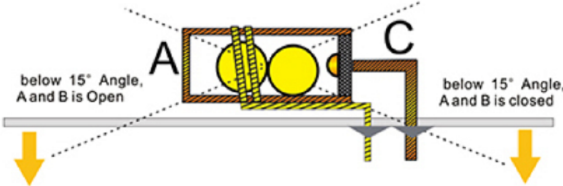

— 产品包装 —

1000pcs/袋 (PVC塑料袋, 按一般电子料存放要求存放)

— 电器特性 —

1	电压	1-6V
2	电流	<20mA
3	瞬间导通时间	about 2ms
4	瞬间闭路电阻	<30 ohm
5	开路电阻	>10M ohm
6	耐温	Operating: -40°C to 80°C
7	端子拉力	500gf for 1 minute
8	盐雾测试	95% RH, 40°C for 24 hours
9	操作寿命	100,000 cycles

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L ≤ 16	±0.3
				16<L ≤ 63	±0.4
				L> 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	Vibration switch
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	DWG NO.:
			XB-SW-168DW-7G
WEIGHT	SHEET	REVISIT	
	1/1	A0	