


产品规格书Product Details specification

Product Name	File No.	Version	Date	Page
XB-SW-8001电磁式振动传感元件	XB-SW-3D-287	A2	2023.01.28	4/4

■ SIZE尺寸

Unit: mm,
Tolerance ± 0.25

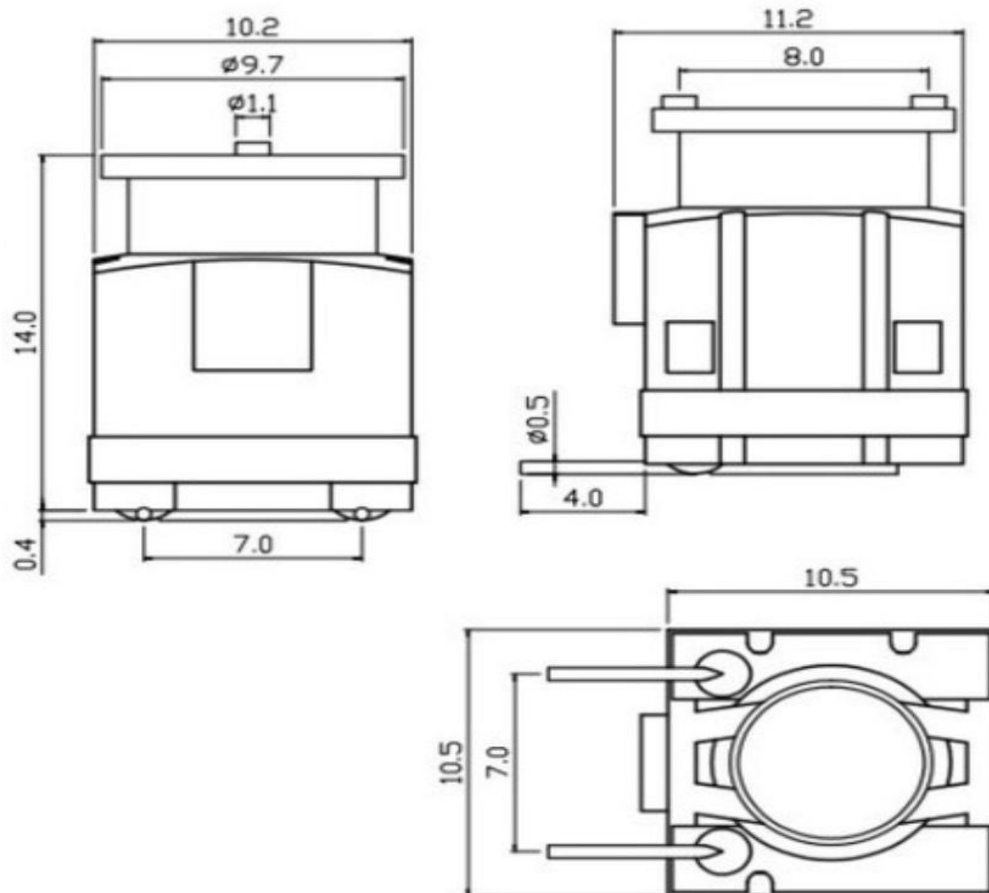

■ Note 注意事项

- 1.If the product used for high security products and durability of extremely high equipment (such as life safety equipment, aviation facilities, disaster prevention device), please confirm whether a share, can seek advice our company for details.
如果该产品要用于高安全性产品及耐久性极高的设备中（如生命安全设备、航空设施、防灾装置），请确认是否合用，或咨询我司了解详情。
- 2.In case of fire, Please do not overload applicable.
请勿超负荷使用，以防发生火灾。
- 3.The welding temperature or time more than standard, can cause switch collapse.
焊接温度或时间超过规范时，会造成开关解体。
- 4.Do not use water solubility flux. May cause damage to the switch.
勿使用水溶性助焊剂、可能会造成开关损坏。
- 5.Do not use solvent wash switch.
勿使用溶剂清洗开关。
- 6.This switch conduction rate of 98% (conductivity rate per 100 times value switchactions, can good conduction ratio).
本开关导通率为98%以上（导通率是指开关每100次动作中，可以良好导通的比率）。
7. X i b a n g company is only responsible for the defective problems of the product itself, return and exchange
the defective products, and does not bear other joint and several expenses.
溪榜公司只承担本产品本身不良问题,对不良品进行退换货,不承担其它连带费用责任。

地址：广东省东莞市黄江合路工业区

Add: Huangjianghe Road Industrial Zone, Dongguan City, Guangdong Province

TEL: 0769-82055138 82056828

Fax: 0769-83663452

<http://www.alpsr.cn> www.alpsr.com

E-mail:XB@ALPSR.CN