


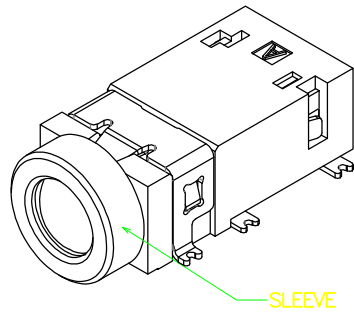
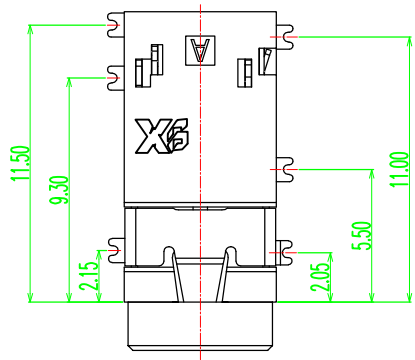



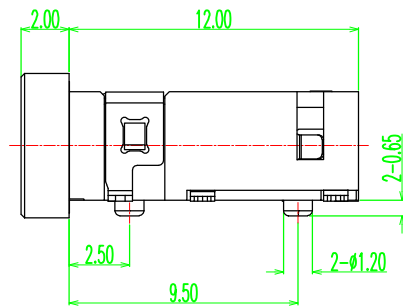


3D VIEW

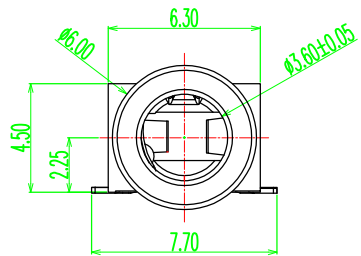



1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 30 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

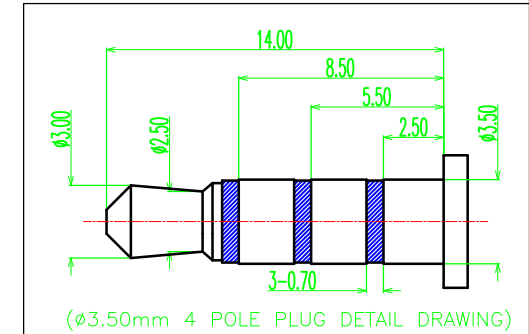

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

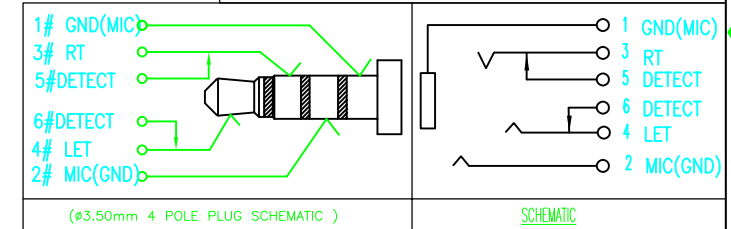

8	SLEEVE	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
7	HOUSING	1	HIGHT TEMPERATURE PLASTIC COLOR BLACK	
6	TERMINAL 6#	1		T=0.25mm
5	TERMINAL 5#	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL;GOLD PLATING ON SOLDER AREA ;	T=0.25mm
4	TERMINAL 4#	1		T=0.25mm
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1		T=0.25mm
1	TERMINAL 1#	1	COPPER ALLOY;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.25mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

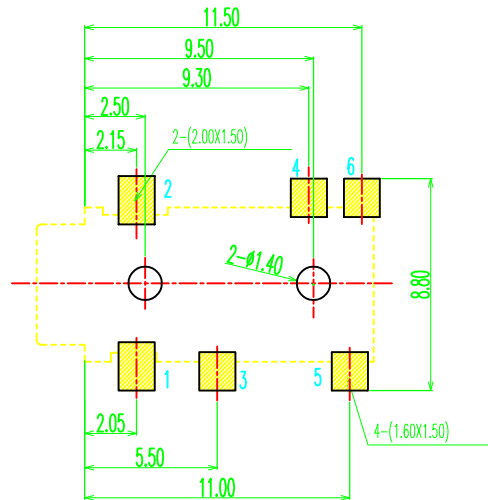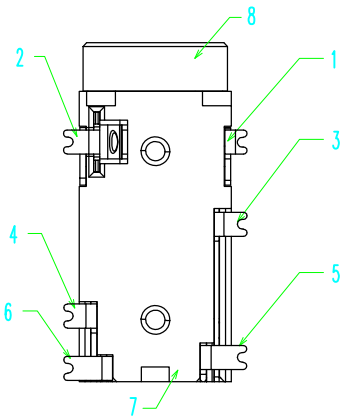

P.C.B LAYOUT TOP VIEW

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	

3RD ANGLE PROJECTION

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DESIGN: Tony	PART NAME: Φ3.5 Phone Jack
CHECK:	PART NO. XB-PJ03506-0662-00000H
APPROVED: Andy	SHEET: 1/1 REV.: A1
2019.10.29	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------