



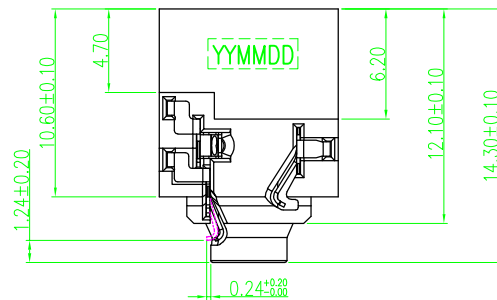

DATE CODE:
YY MM DD
DAY
MONTH
YEAR




3D VIEW

NOTES:


1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 0.5 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial),
CHANGE 10mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial),
100 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 2.0Kgf MAX.;
 - 4.2. UNMATING FORCE: 0.5Kgf MIN.;
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. OPERATION: -30°C~+80°C.

TABLE 1:

⑧	Contact_5	⑤	1	C5210	CONTACT AREA: Au1u"MIN SOLDER AREA: Au1u"MIN 50u" OVER ALL	T=0.20mm
⑦	Contact_6	⑥	1	C5210		T=0.20mm
⑥	Contact_4	④	1	C5210		T=0.20mm
⑤	Contact_3	③	1	C5210		T=0.20mm
④	Contact_2	②	1	C5210		T=0.20mm
③	Contact_1	①	1	C5210		T=0.20mm
②	Separator		1	PA10T	BLACK,UL94V-0	
①	Housing		1	PA10T	BLACK,UL94V-0	
NO.	PART NAME	QTY		MATERIAL	DESCRIPTION	REMARK

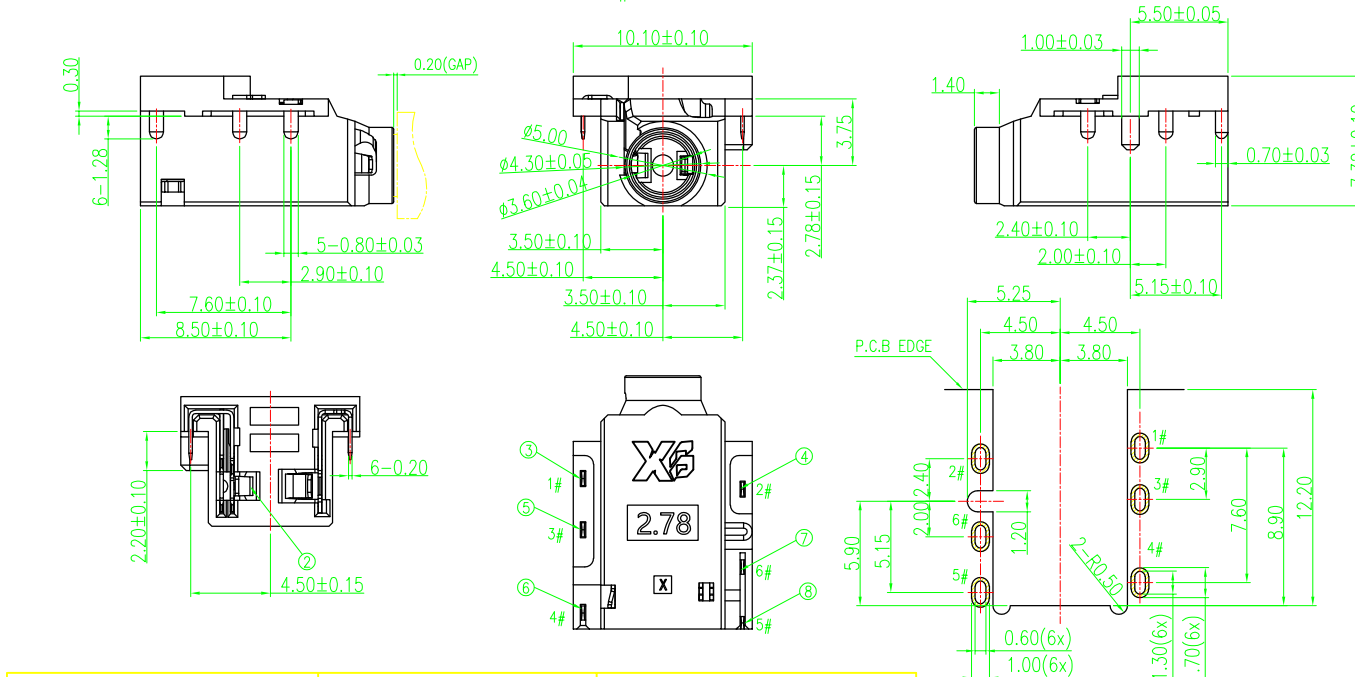

PCB HOLES(TOP VIEW) t=1.0mm
NOTE:GENERAL TOLERANCE:±0.05mm

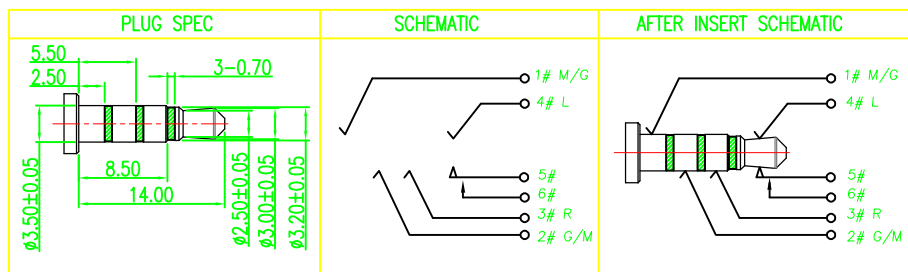


UNLESS OTHERWISE
SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM TOL	DIM TOL	CHECK:	2021.11.23	Φ3.5 PHONE JACK
X. ±0.50	X. ±2°			
X.X ±0.30	X.X ±1°			
X.XX ±0.20	X.XX			
X.XXX ±0.10	X.XXX			
3RD ANGLE PROJECTION	UNIT: mm	APPROVED	Andy	PART NO.
			2021.11.23	XB-PJ03506-0859-00000H
				SHEET: 1/2 REV.: A1
				DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

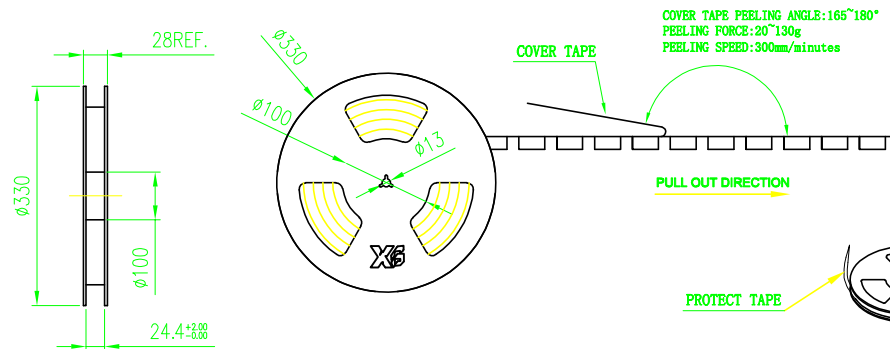

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g
PEELING SPEED:300mm/minutes

COVER TAPE

PULL OUT DIRECTION


PROTECT TAPE

10 DISK


VACUUM BAG

DRYER

FOLDER PAPER BOARD

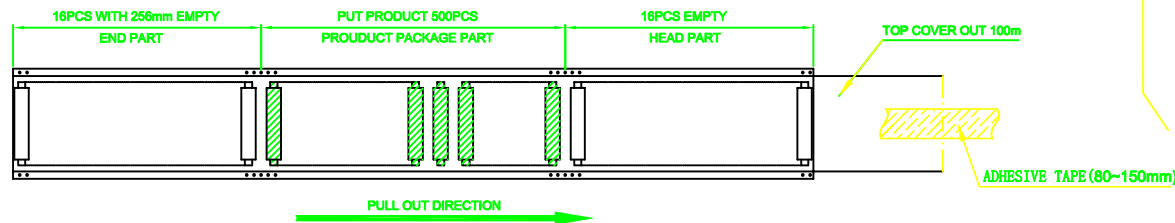

PULL OUT DIRECTION

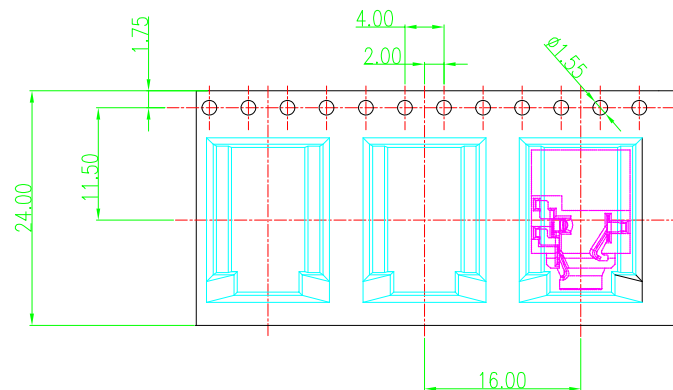


NOTES:

1. Material requirements:

- 1.1 The carton material requirements for the K=A,
Dimension is 350*340*310mm;
- 1.2 Reel materials for PET; size reel for 330*28.4.

2. Packaging requirements:

- 2.1 The tape into the packing machine, before the empty 16PCS,
after the release of the product 500PCS,
then the empty 16PCS with 256mm length of stay;
- 2.2 Top cover should out 100mm of the carrier tape. After winding,
using adhesive tape (80~150mm) to stick the leader of cover
tap on the side of the carrier tape;
- 2.3 Winding a protect tape around the reel, then stick it
by adhesive tape;
- 2.4 label should paste in the designated area of the reel;
- 2.5 Put a dryer and a packed reel in the vacuum bag and
make the vacuum process;
- 2.6 The tired folded 10 disks in the carton total 5000pcs;
- 2.7 Packed finished packing sealing, and in the outer carton label



CARTON SIZE

1 CARTON = 10 REEL = 5000 PRODUCT

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:

ANGLES:

DESIGN:

Tony

PART NAME:

Φ3.5 PHONE JACK

DIM TOL

DIM TOL

CHECK:

2021.11.23

PART NO.

XB-PJ03506-0859-00000H

X. ±0.50

X. ±2°

X.X ±0.30

X.X ±1°

X.XX ±0.20

X.XX

X.XXX ±0.10

X.XXX

APPROVED

Andy

2021.11.23

SHEET: 2/2

REV.: A1

DRAWING NO

REV. ECN NO.

DESCRIPTION

DESIGN DATE

3RD ANGLE PROJECTION

UNIT: mm

8

7

6

5

4

3

2

1