

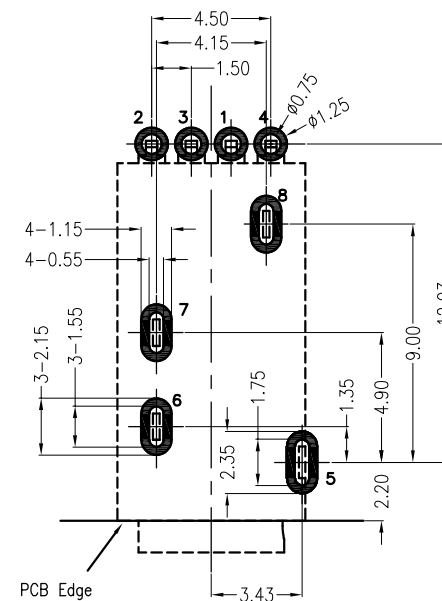

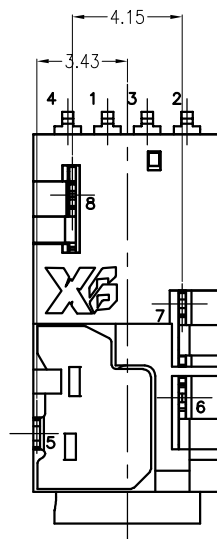
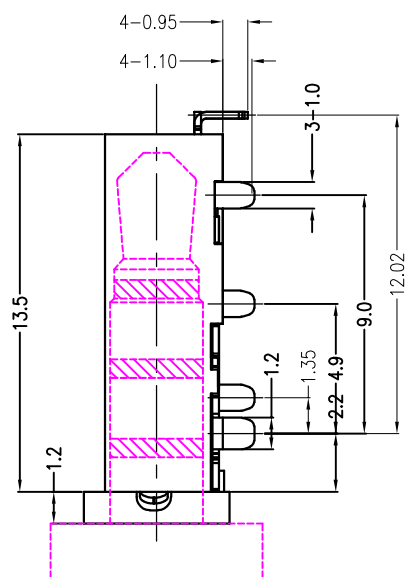



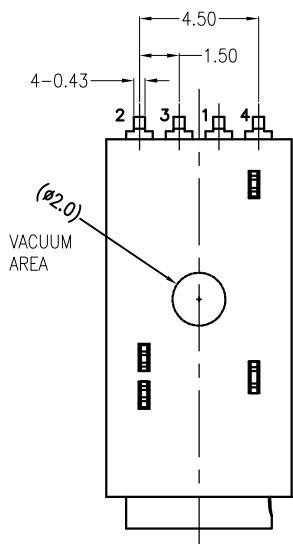


RECOMMEND PCB LAYOUT
TOLERANCE:±0.05



Notes:

- 1.Current Rating: 12V&1A max.
- 2.Contact Resistance: 30mOhms Max.(initial)
- 3.Insulation Resistance: 100M Ohms Min./500V DC
- 4.Dielectric Withstanding Voltage: 500V AC/1Minute
- 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
- 6.Durability: 5,000 Cycles
- 7.Operating Temperature:-25°C to+85°C

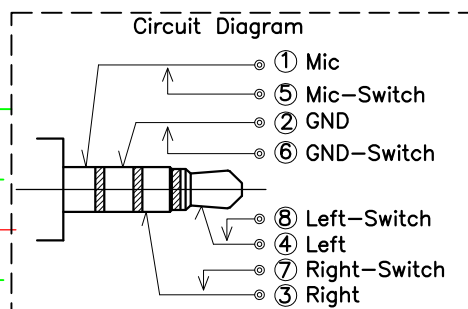


9	Housing	Thermoplastics	Black 94-V0
8	Left-Switch	Copper Alloy	Sn On Solder&Contact Area;Ni Plated Overall.
7	Right-Switch		
6	Mic-Switch		
5	Ground-Switch		
4	Left Contact	Copper Alloy	G/F On Contact Area Sn On Solder Tails Ni Plated Overall.
3	Right Contact		
2	Mic Contact		
1	Ground Contact		
Item	Name	Material	Description

UNLESS OTHERWISE
SPECIFIED TOLERANCES


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:
DIM	TOL	DIM	TOL	CHECK:	2020.3.20	3.5Φ Audio Jack
X.	±0.50	X.	±2°			PART NO.
X.X	±0.30	X.X	±1°			XB-PJ03508-0693-00000H
X.XX	±0.20	X.XX				SHEET: 1/1 REV.: A1
X.XXX	±0.10	X.XXX		APPROVED	Andy	DRAWING NO
3RD ANGLE PROJECTION		UNIT: mm		2020.3.20		


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

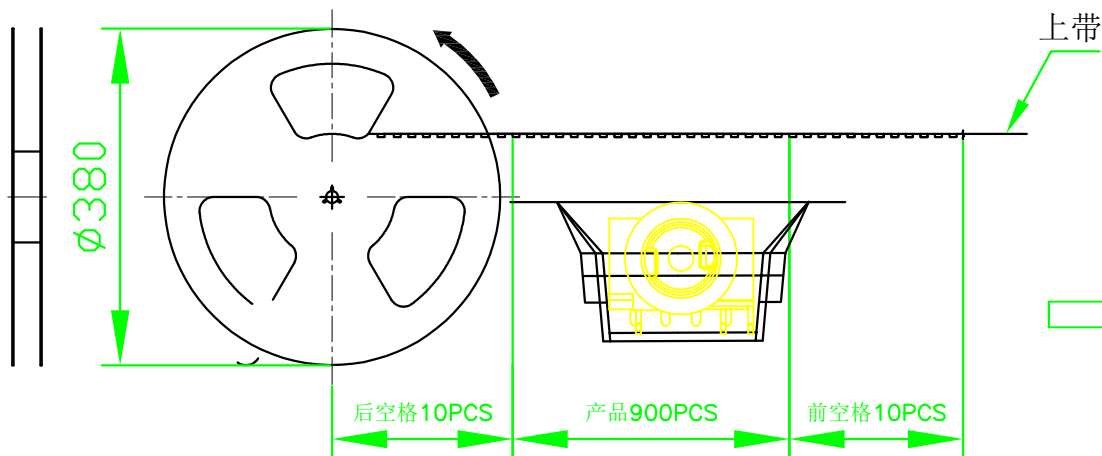

① 产品装入载带

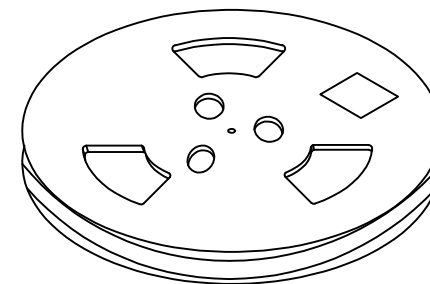

② 粘贴标签示意图
900pcs/Reel

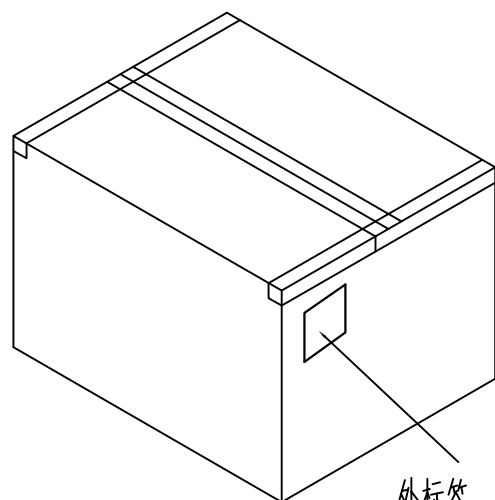

③ 8卷产品叠加示意图
8Reel

④ 封箱示意图
7200pcs/Box

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL		2020.3.20	3.5Φ Audio Jack	
X.	±0.50	X.	±2°	CHECK:		-包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX				XB-PJ03508-0693-00000H	
X.XXX	±0.10	X.XXX		APPROVED	Andy	SHEET: 1/1 REV.: A1	
3RD ANGLE PROJECTION				UNIT: mm	2020.3.20	DRAWING NO	