

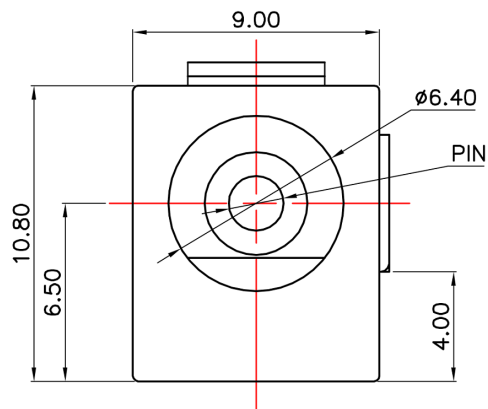
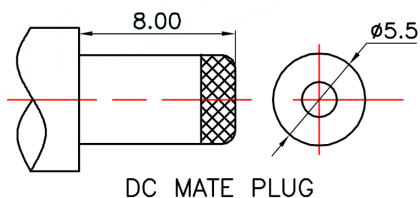



CAD FILE:

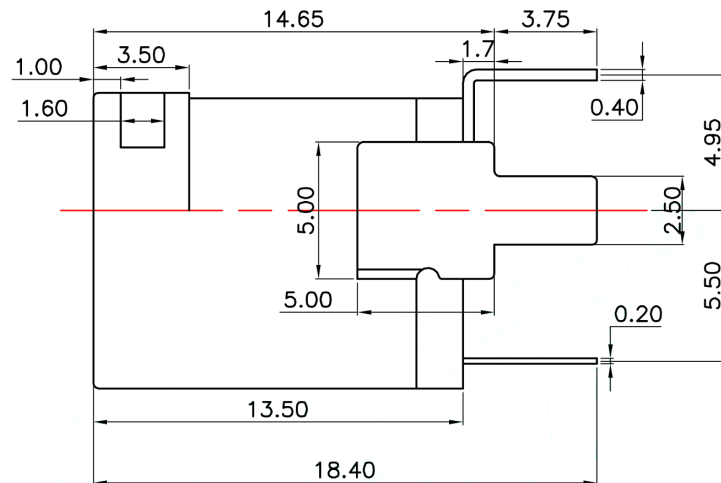

P.C.B LAYOUT(Copper-side view)

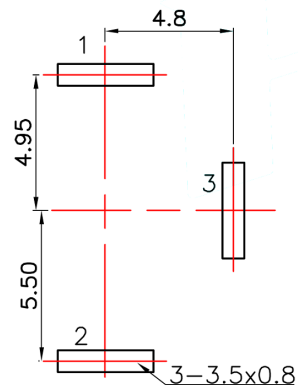

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles



Model No.	1	2	3
PIN	ø2.0	ø2.35	ø2.5

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
7					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
6					TITLE : DC Power Jack	UNIT : mm	DRWG NO.:		
5					MODEL:	SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
4	CONTACT	SUS	1	Ag CLAD				CHK'D	DONG. PANG
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED				APPD.	ZENQ. CHEN
2	COVER	STEEL STRIP	1	Ni PLATED					
1	KNOB	PPA	1	BLACK					