

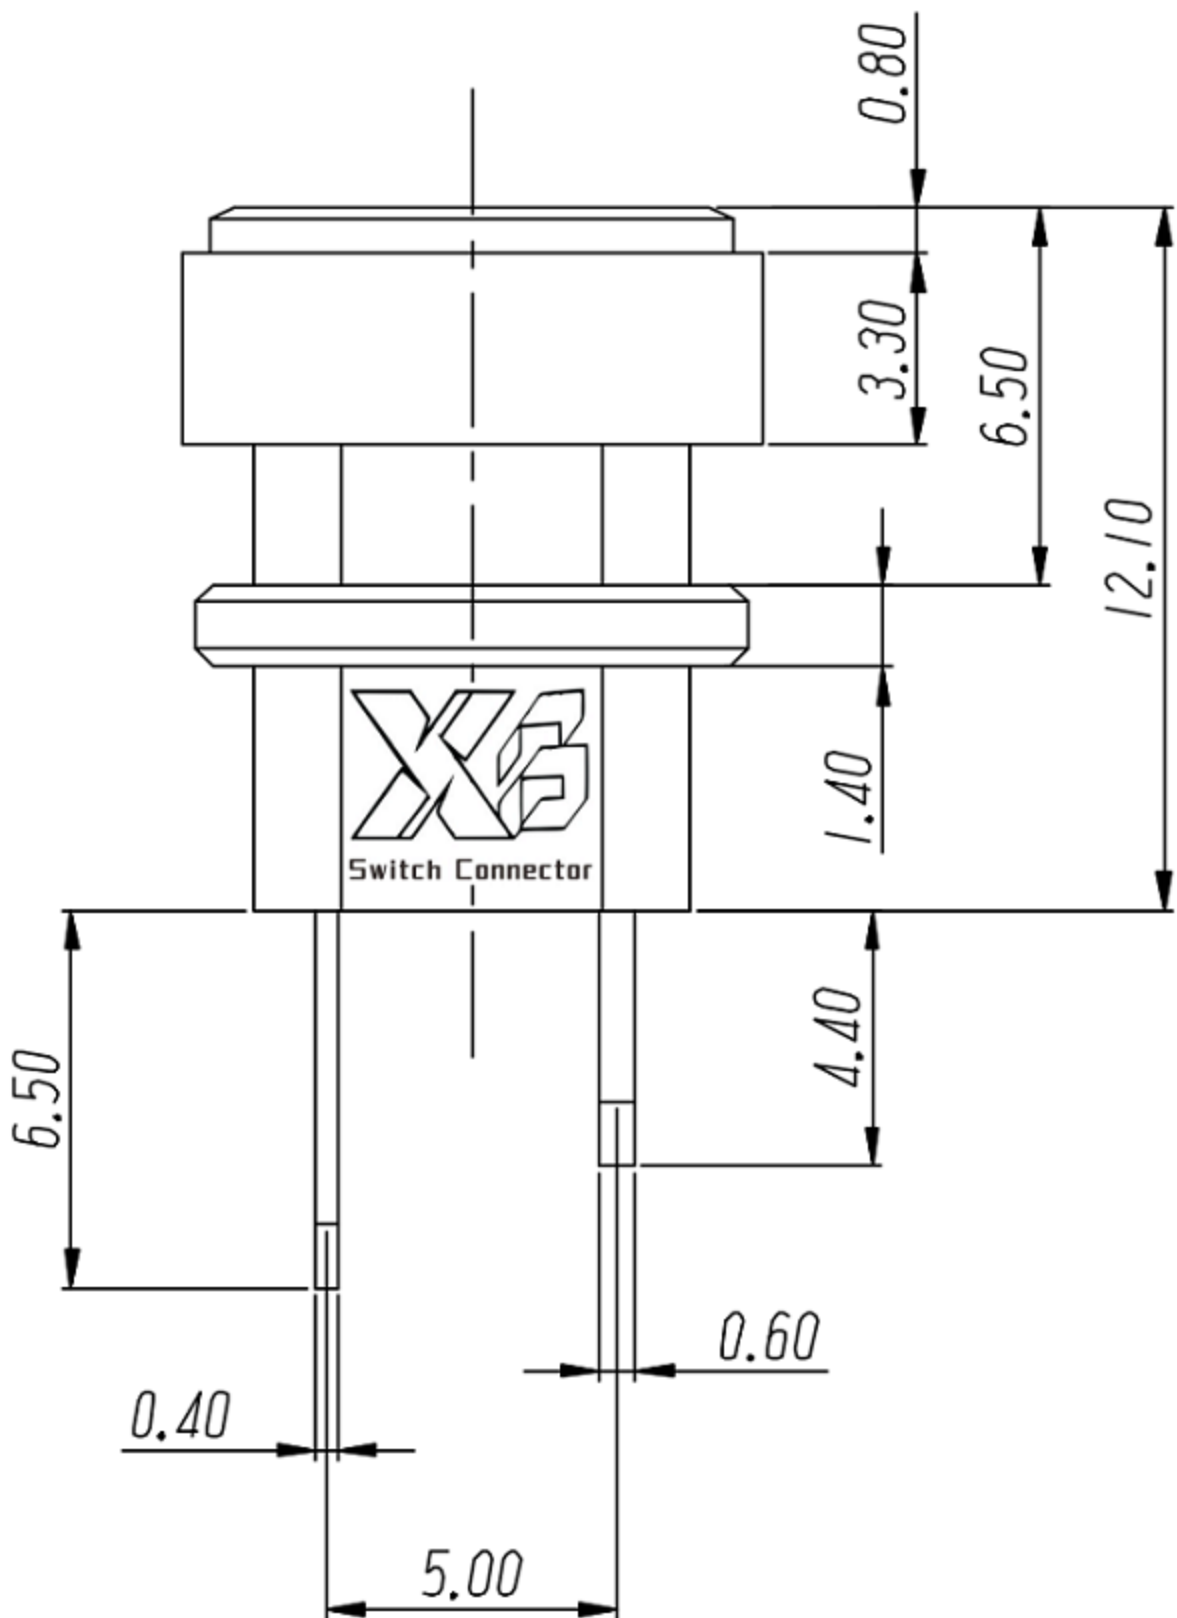
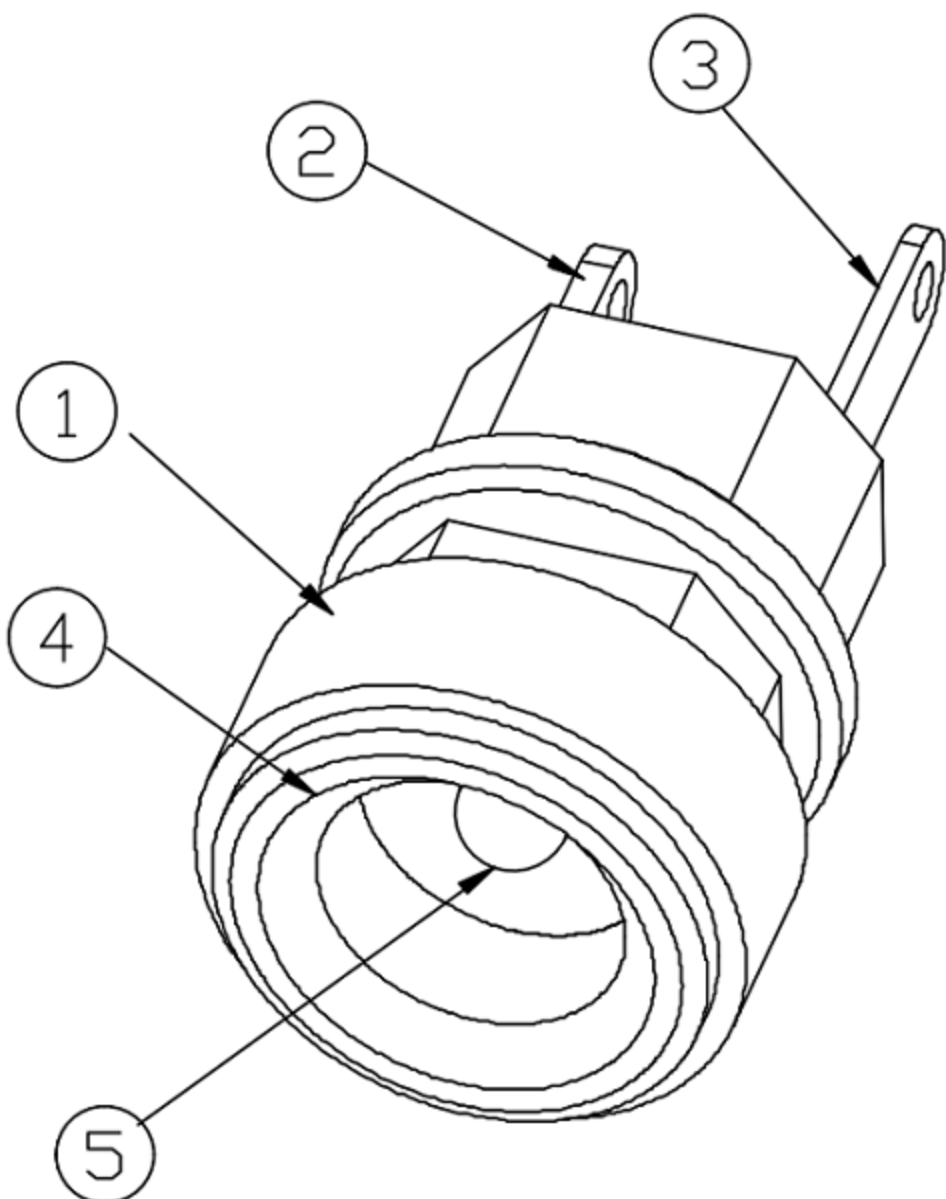
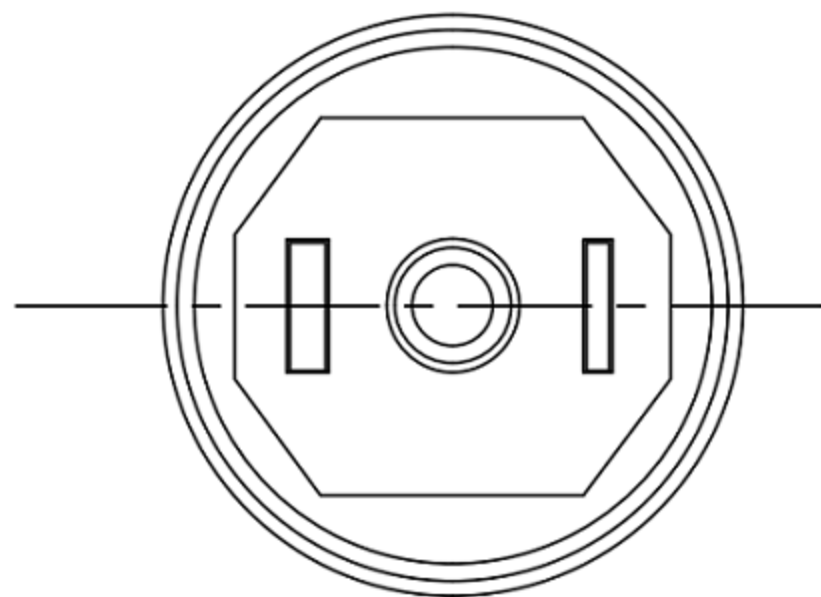
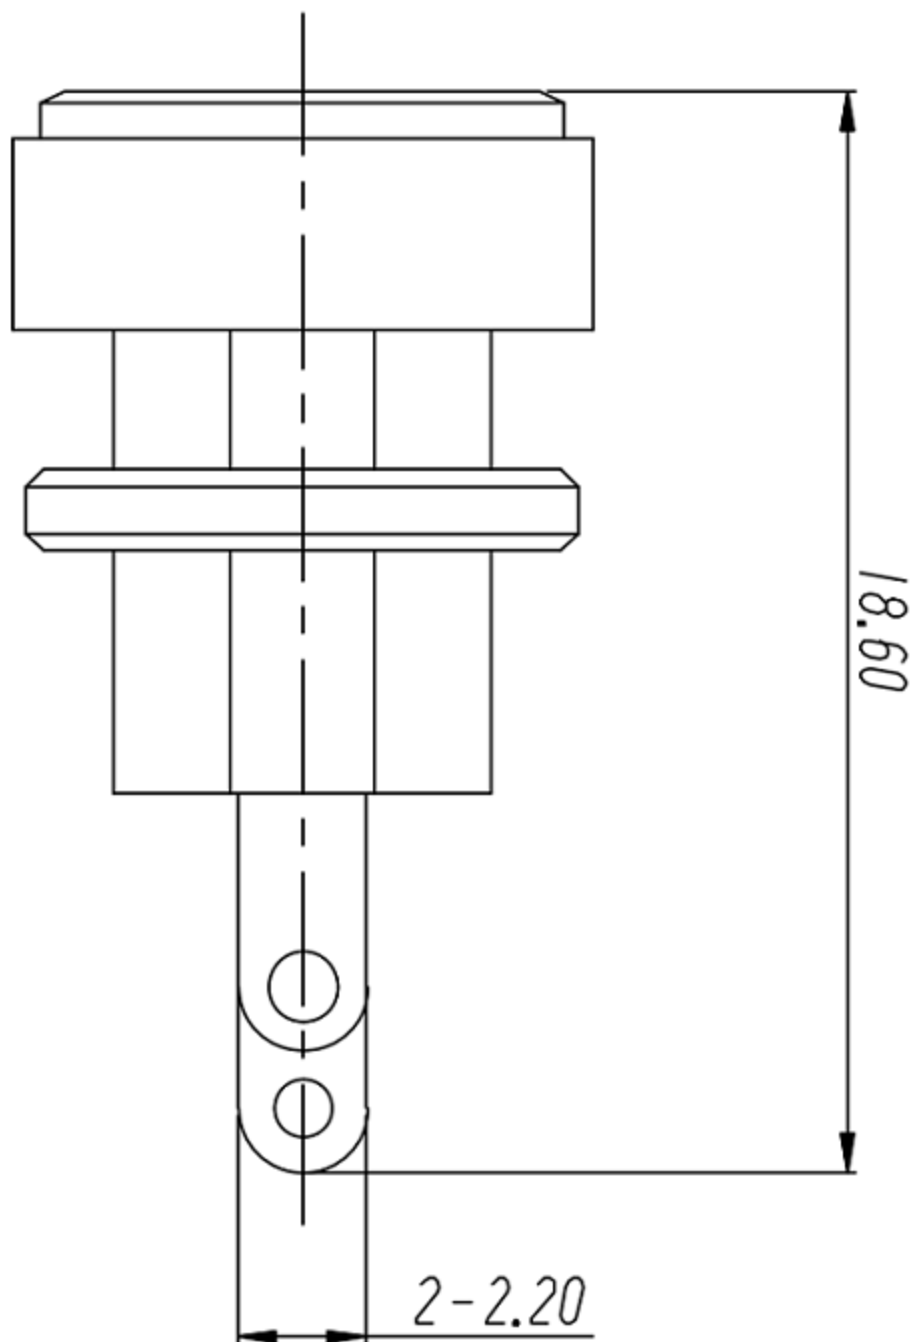



CAD FILE:

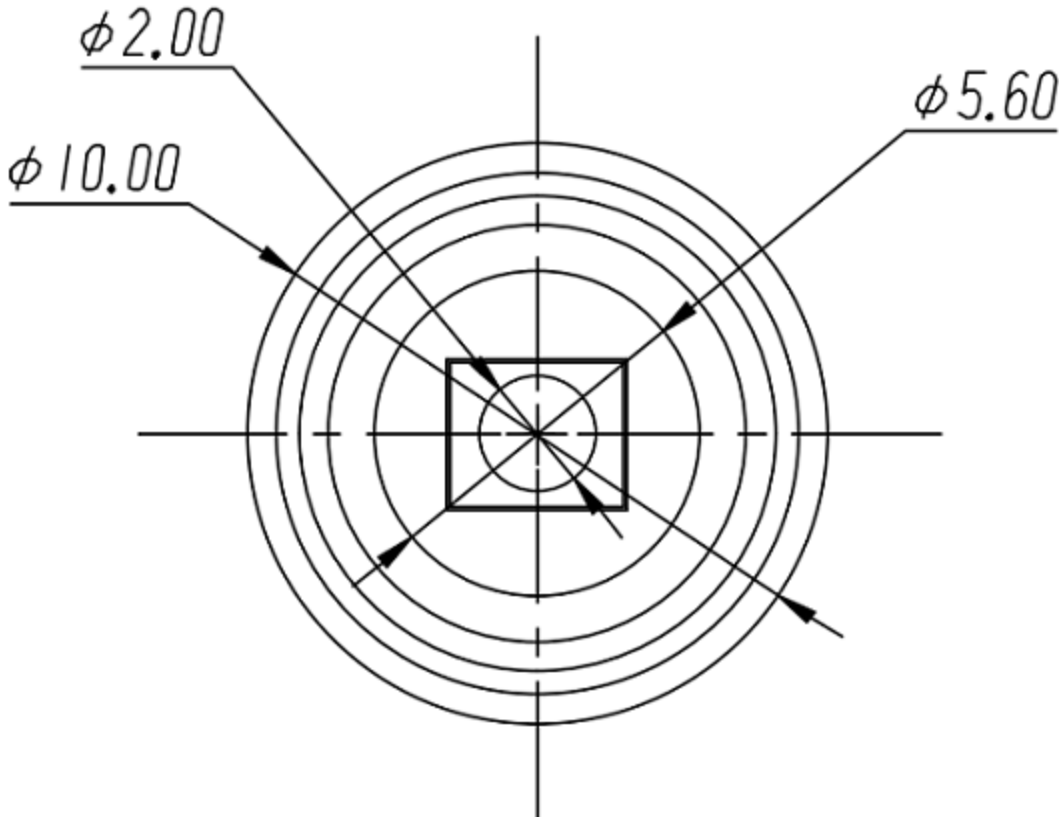

PCB LAYOUT
TOP VIEW (TOLERANCE: ± 0.05)

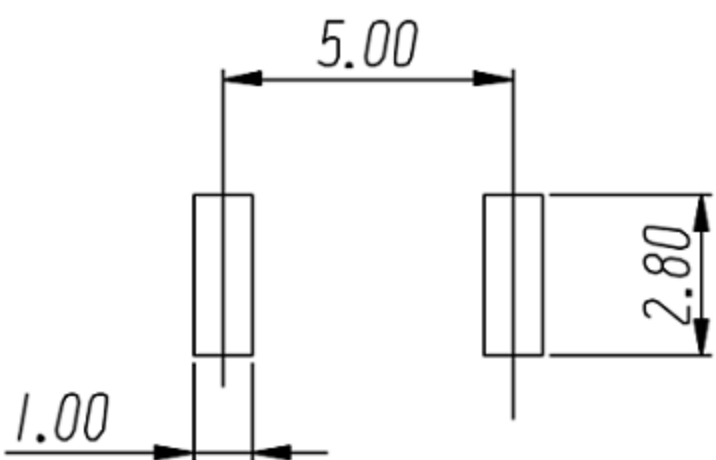

SCHEMATIC

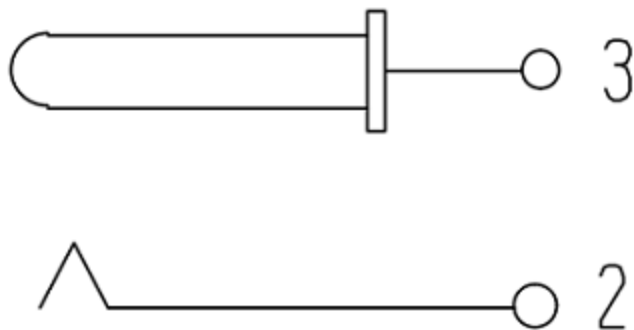

技术特性:

使用条件: $-30 \sim 70^{\circ}$
额定负荷: DC 30V 3A
接触电阻: $\leq 0.02W$
绝缘电阻: $\geq 100MW$ DC250V
耐压: AC250V(50Hz) /min
插拔力: 3~15N
寿命: 5000次

8					TOLERANCE UNLESS SPECIFIED				
7									
6					WITHIN 1.5mm : $\pm 0.1mm$ OVER 1.5mm : $\pm 0.2mm$	A	2012-9-25	初 版	ZENQ. CHEN
5						ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-022B-K
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					