
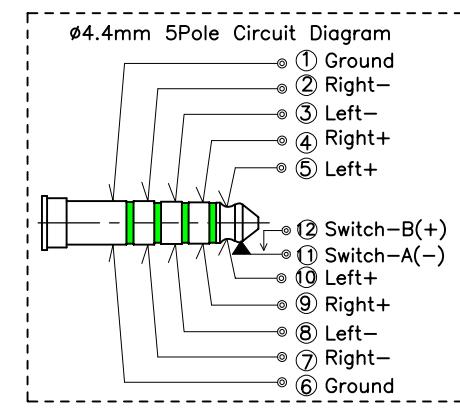
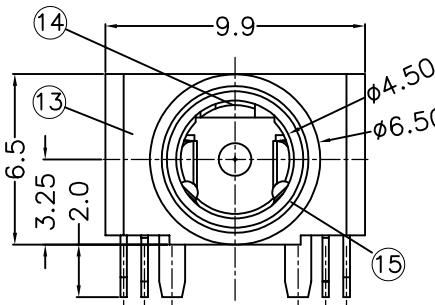
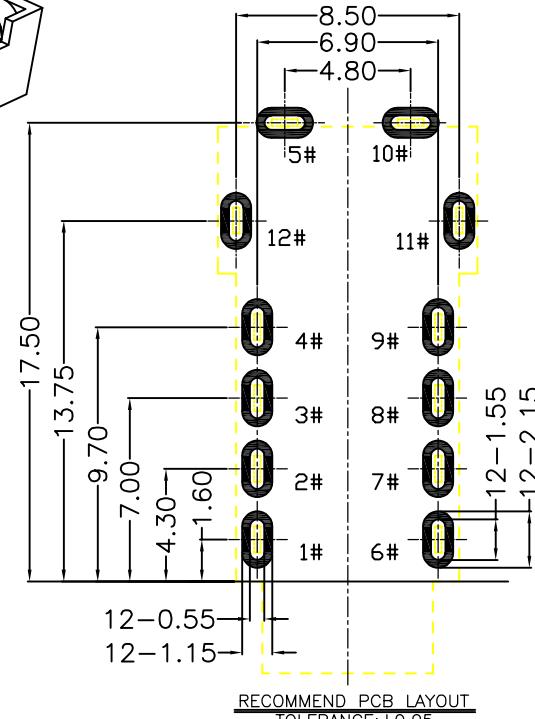
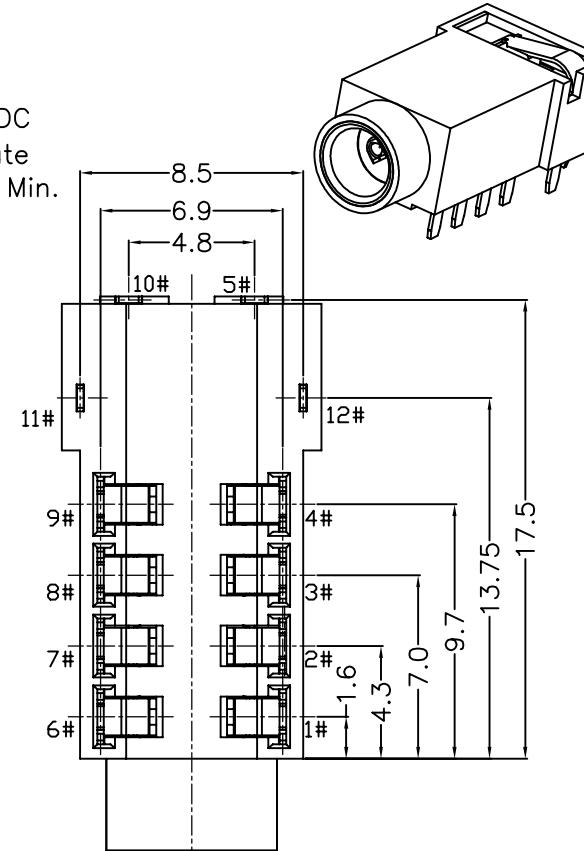
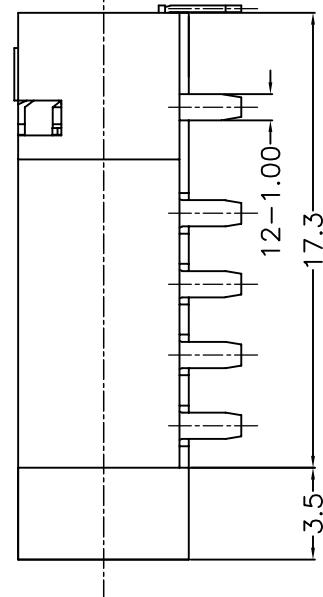


## Notes:

- 1.Current Rating: 12V&1A max.
  - 2.Contact Resistance: 50mOhms Max.(initial)
  - 3.Insulation Resistance: 100M Ohms Min./500V DC
  - 4.Dielectric Withstanding Voltage: 500V AC/1Minute
  - 5.Mating Force: 50N Max, Withdrawal Force: 8N Min
  - 6.Durability: 5,000 Cycles
  - 7.Operating Temperature:-25°C to+85°C

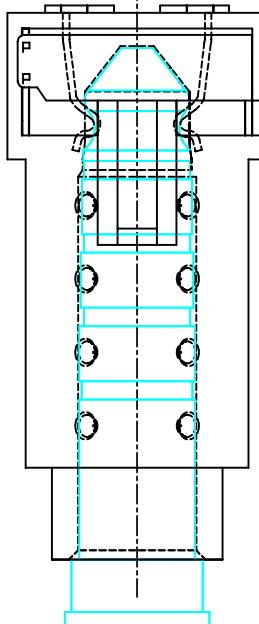

Item	Name	Material	Description
15	Sleeve	Copper Alloy	G/F Plated Overall.
14	Separator		
13	Housing	Thermoplastics	Black UL 94-V0
12	Switch-A(+)		
11	Switch-B(-)		
5/10	Left+ Contact	Copper Alloy	G/F On Contact Area & Solder Tails Ni Plated Overall.
4/9	Right+ Contact		
3/8	Left- Contact		
2/7	Right- Contact		
1/6	GND Contact		

UNLESS OTHERWISE  
SPECIFIED TOLERANCE





# 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONIC CO., LTD.


UNLESS OTHERWISE SPECIFIED TOLERANCES				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony 2021.11.23	PART NAME: Φ4.4 5POLE AUDIO JACK	
DIM	TOL	DIM	TOL			CHECK:	
X.	±0.50	X.	±2°	APPROVED	Andy 2021.11.23	PART NO.: XB-PJ04412-0973-00000H	
X.X	±0.30	X.X	±1°			SHEET: 1/1 REV.: A1	
X.XX	±0.20	X.X	/	DRAWING NO:			
X.XXX	±0.10	X.XXX	/				
 3RD ANGLE PROJECTION				UNIT: mm			



450PCS/Reel

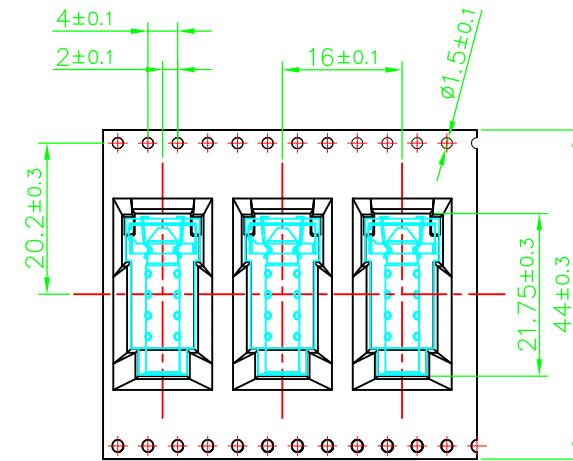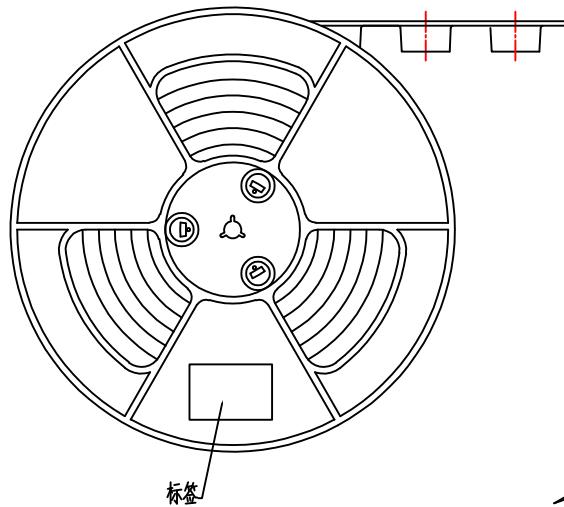

8Reel/Box

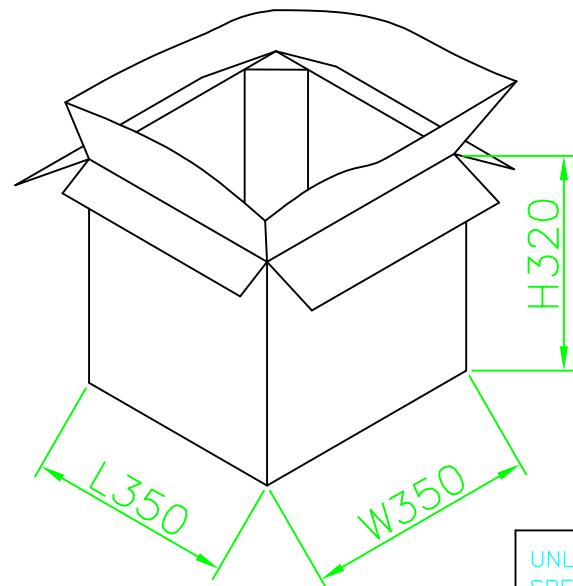

3600PCS/Box

UNLESS OTHERWISE  
SPECIFIED TOLERANCES

DECIMALS:      ANGLES:

DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
XX	±0.30	XX	±1°
XXX	±0.20	XXX	/
X.XXX	±0.10	X.XXX	/

3RD ANGLE PROJECTION  
UNIT: mm

东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	Tony	PART NAME: Ø4.4 5POLE AUDIO JACK - 包装图
CHECK:		PART NO. XB-PJ04412-0973-00000H
APPROVED:	Andy	SHEET: 1/1 REV.: A1
		DRAWING NO
		2021.11.23

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------