




ROHS

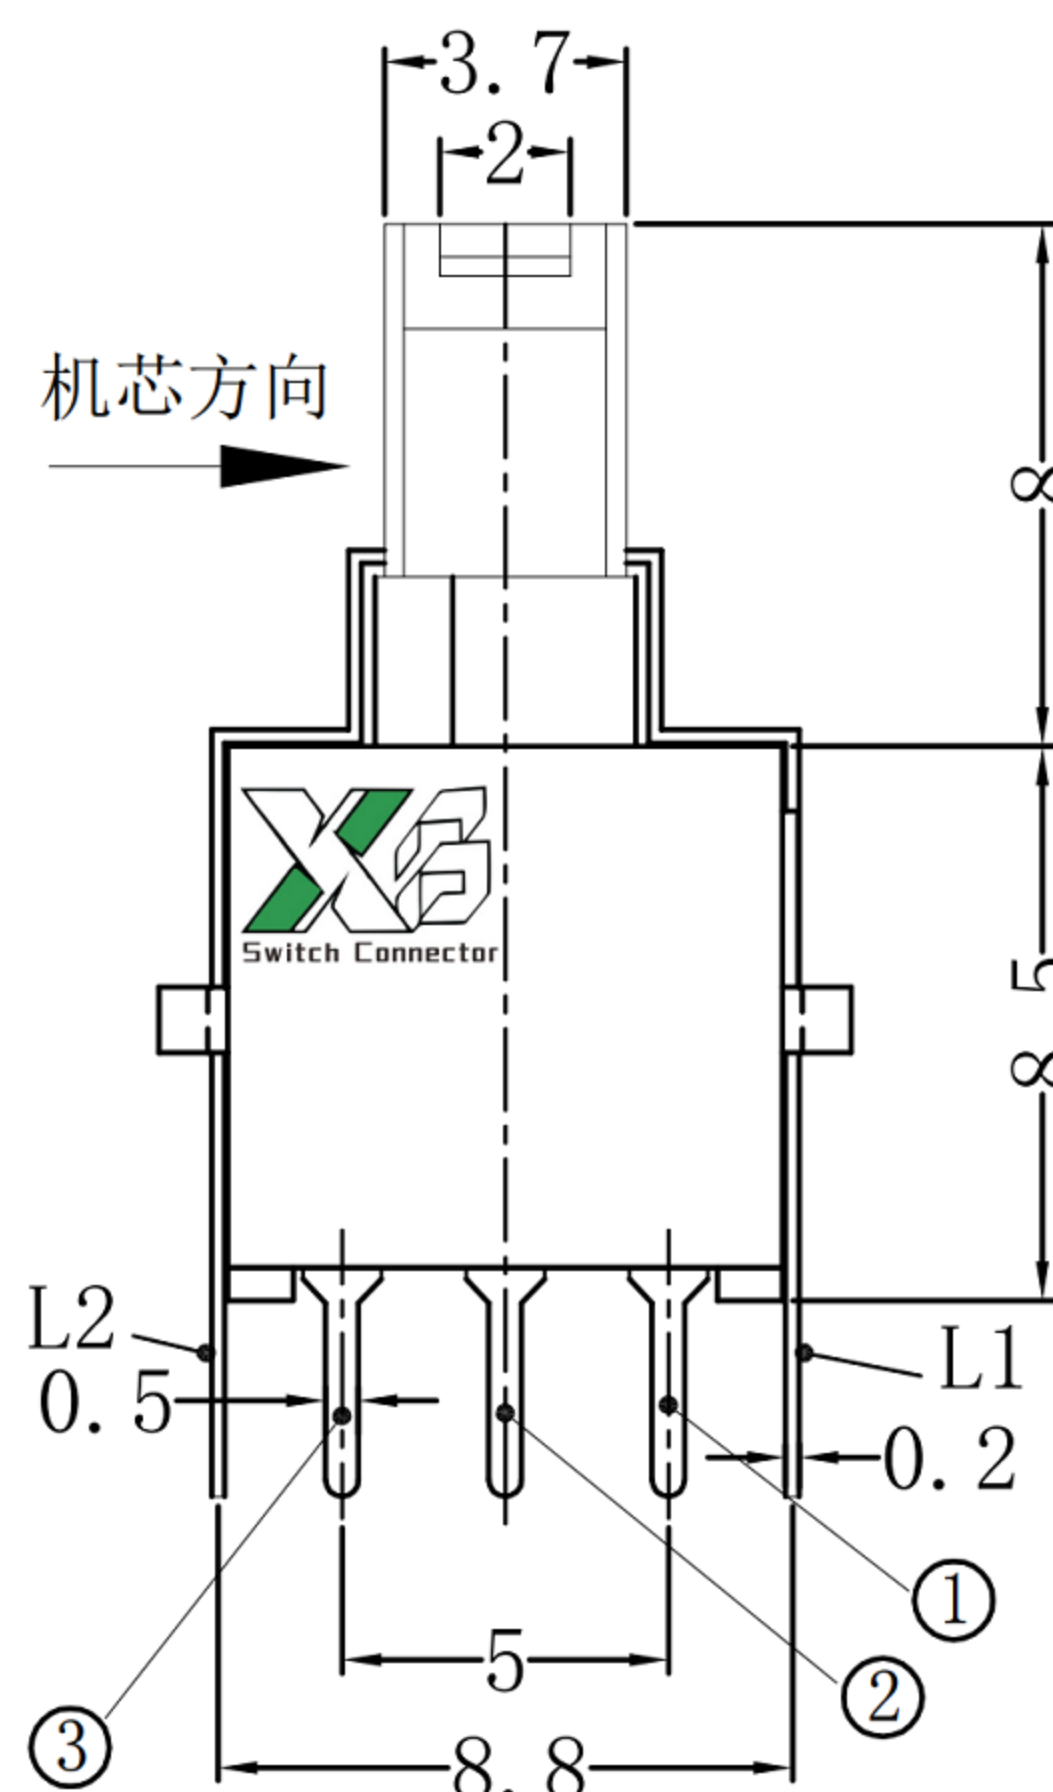

带灯按键开关性能电气

Circuit:DPDT 2P2T

Current Rating:0.3A 0.5A DC

Voltage Rating: 12V 30VDC

Dielectric withstanding voltage :250VAC ftor 1 minute

Contact Resistance: 100m Ω Max . (intial)

Insulation Resistance:100MQ Min.

Operating Force: 250 ± 100

Total Travel: 2.5+0.2mm

Operating life:10,000 Cycles Min

Soldear Specifications: 260° C for 5 Seconds

Function: Momentary or self-lock

Operating Temperature. : $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

8					TOLERANCE						
7					UNLESS SPECIFIED						
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE :Button Switch With Light			UNIT : mm	DRWG NO.: XB-LED-TB-018L		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-LED-TB-018L			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							