




NOTE

- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
- 2.Plating
Plunger: Au over NI
Barrel: Au over NI
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Spring force: 60g±20% at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operateit based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor startto power supply after connector mated fully.

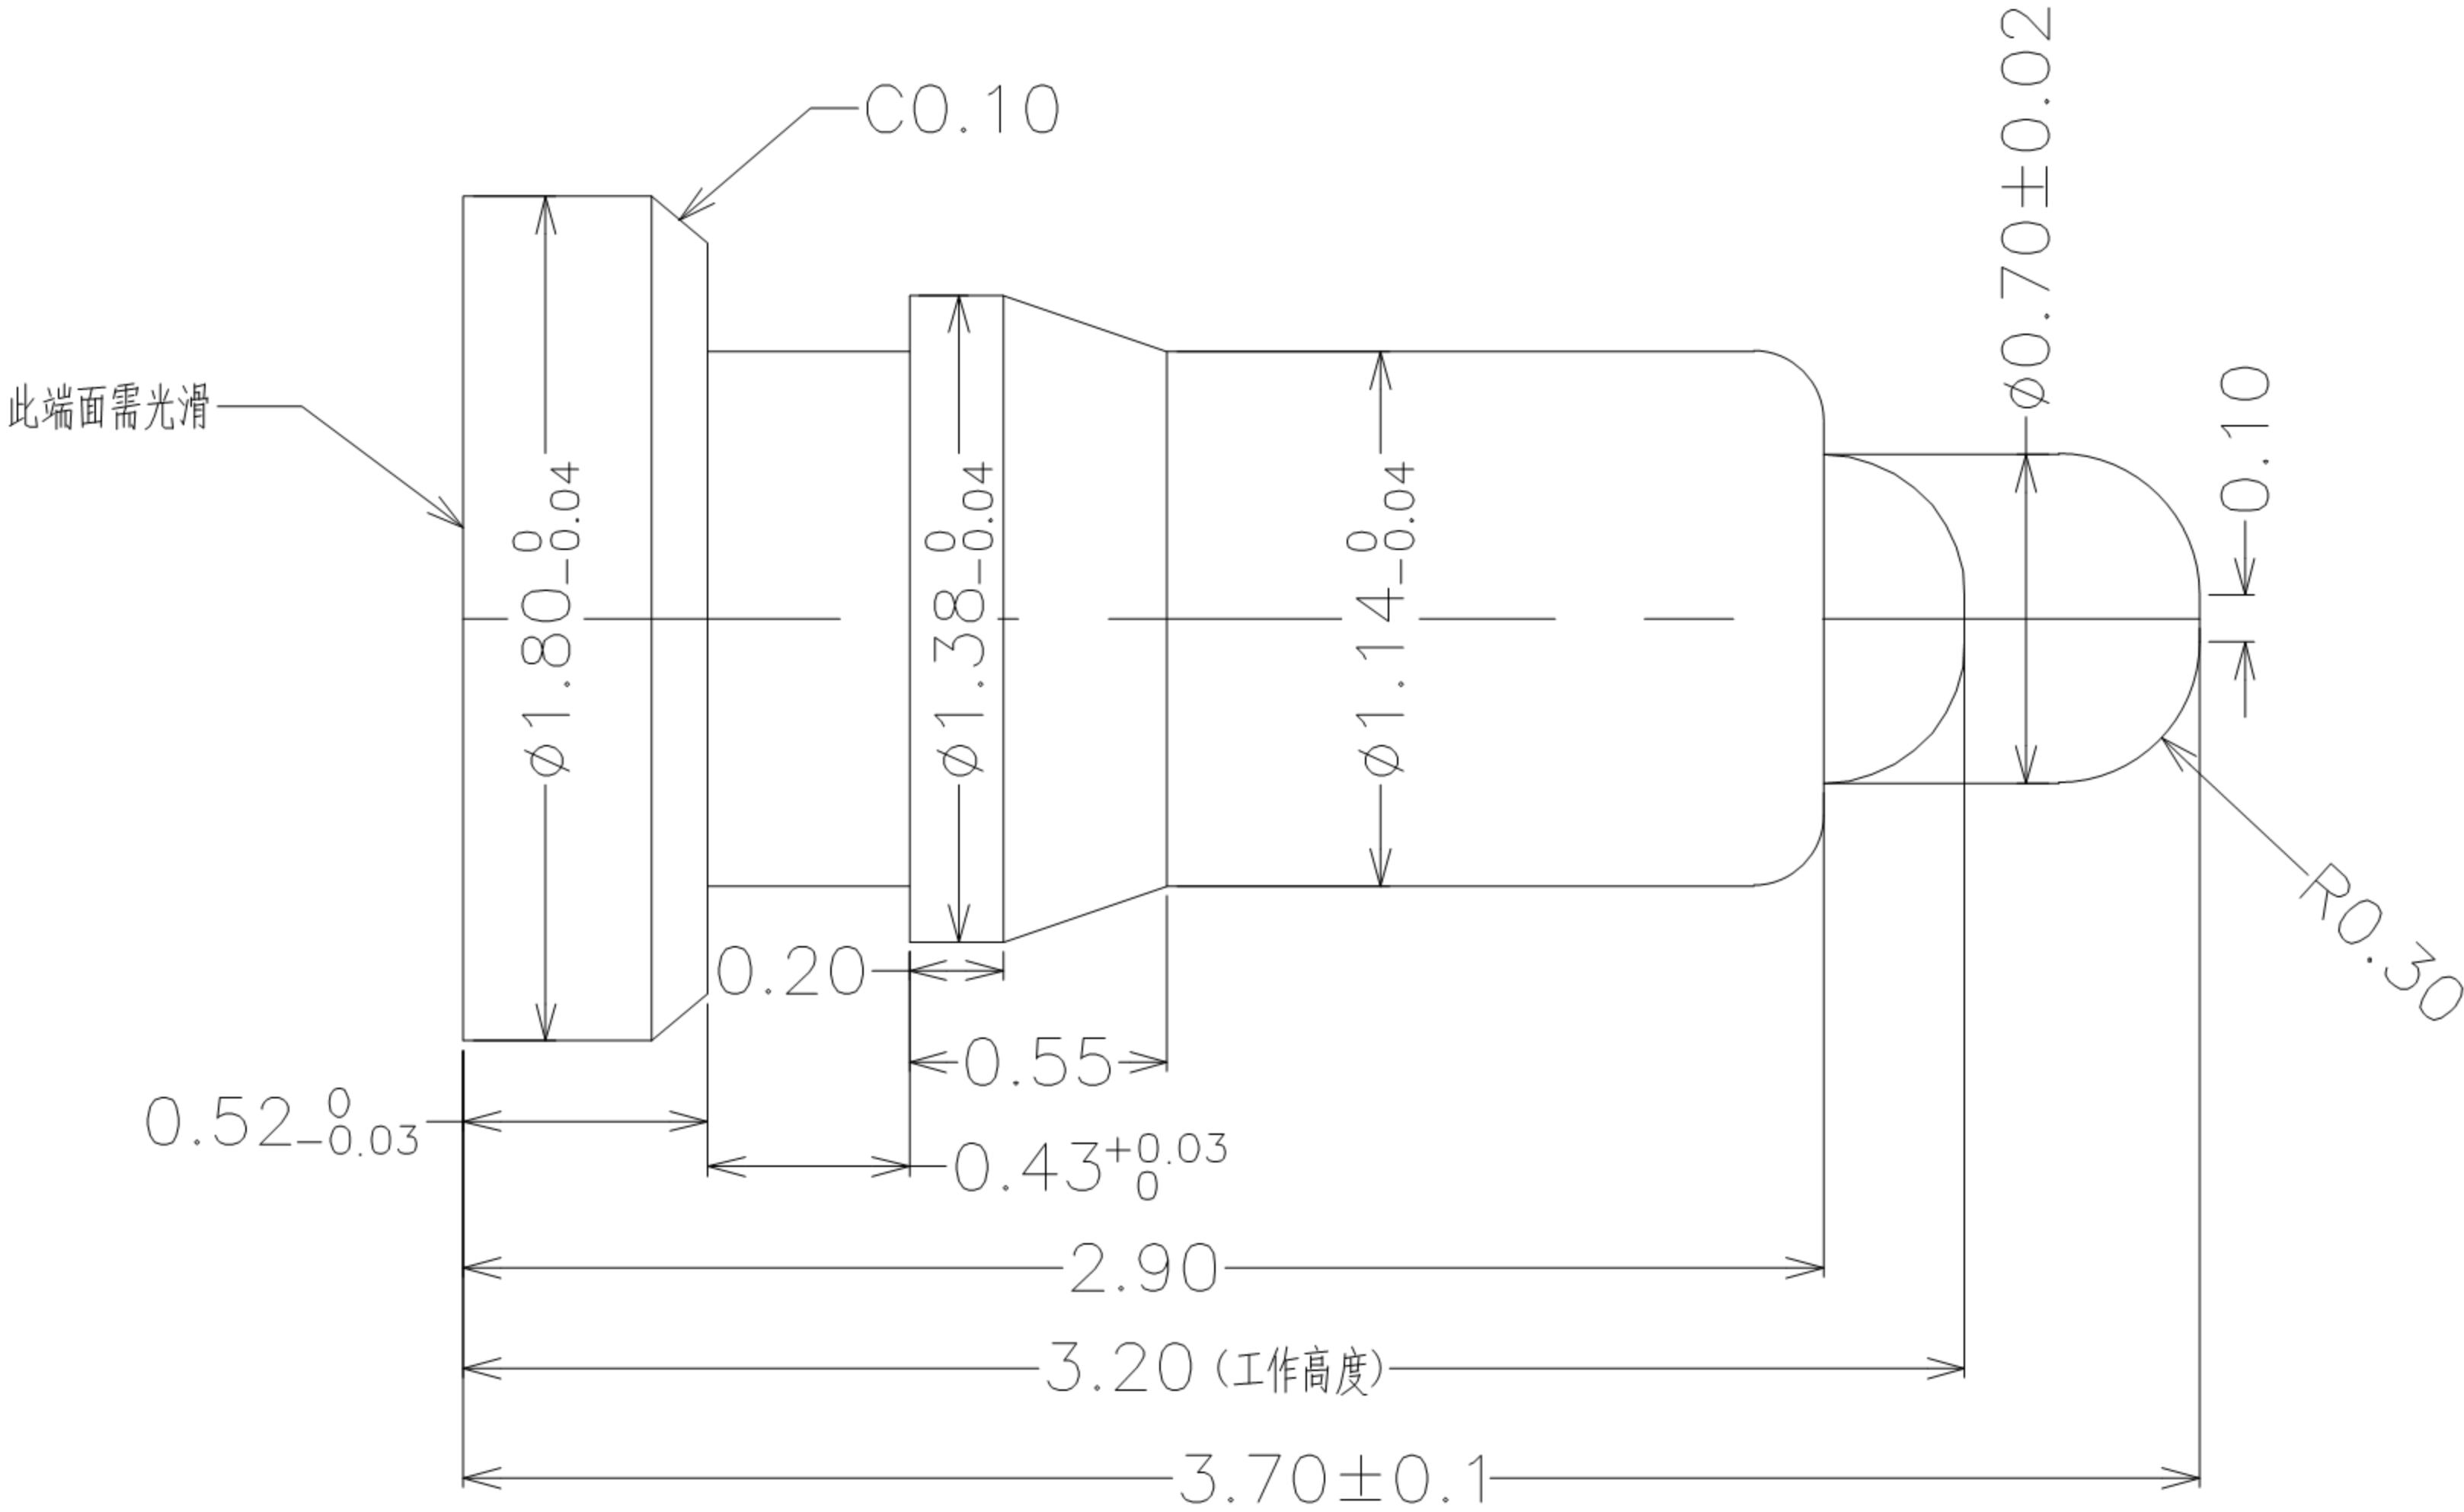

东莞市溪榜电子有限公司


DONG GUAN XI BANG ELECTRONI CS CO., LTD.

Switch Connector

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S



UNITS

MM

				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD. Switch Connector	DRAWN BY: Jack Lu				DATE: 04/01/21		MAT'L		TITLE	CONNECTOR	
					CHECKED BY: Jacky Chen				DATE: 04/01/21			FINISH		MODLE	POGO PIN
					APPROVED BY: Tony Kao				DATE: 04/01/21		SCALE	1 : 1	DWG NO.	XB-PGC-D-1-37-G	SIZE
											SHEET NO.	1 of 1	PART NO.	Thimble Connector	A4
ITEM NO.	DESCRIPTION	DRAWN	DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°		3RD. ANGEL'S		UNITS	MM						VER
															R