
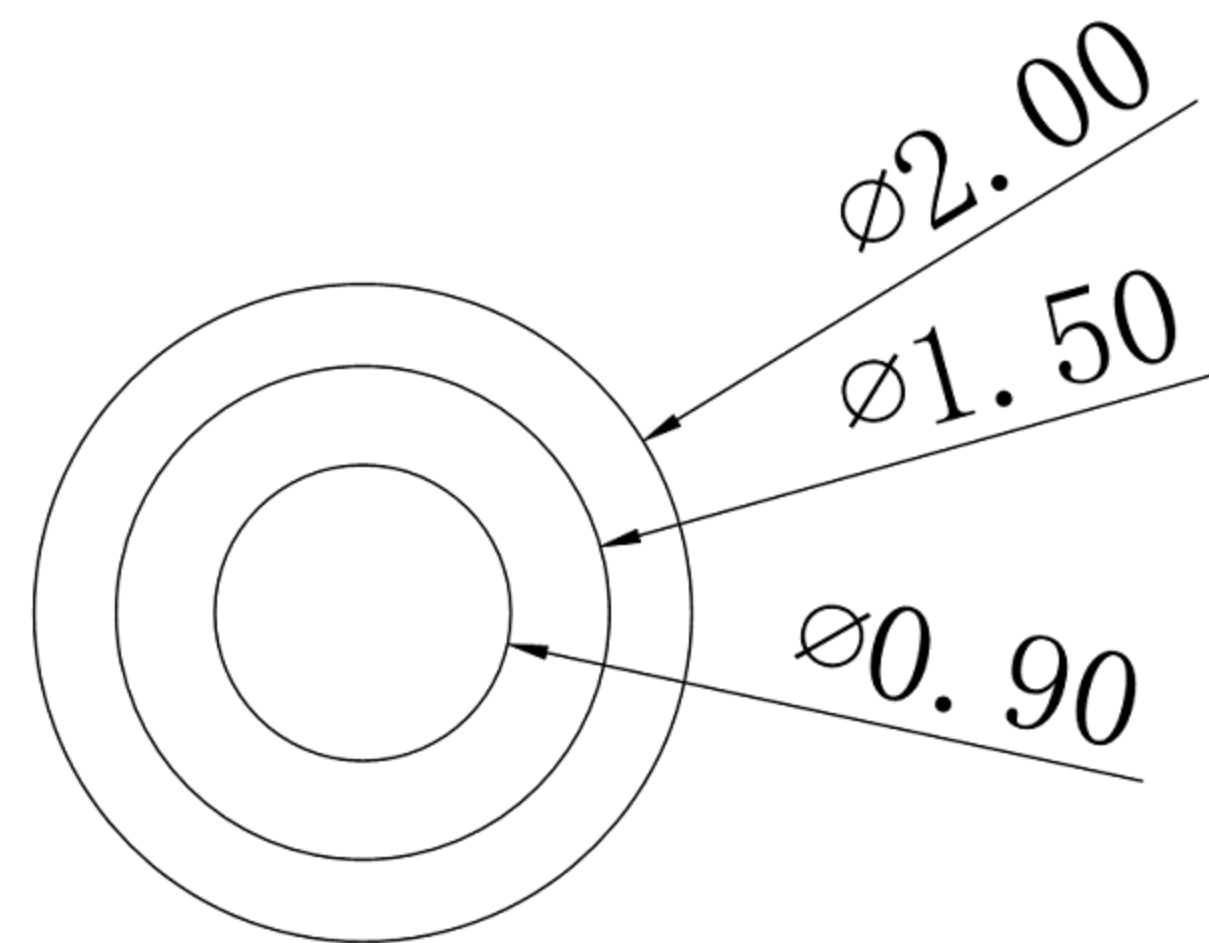


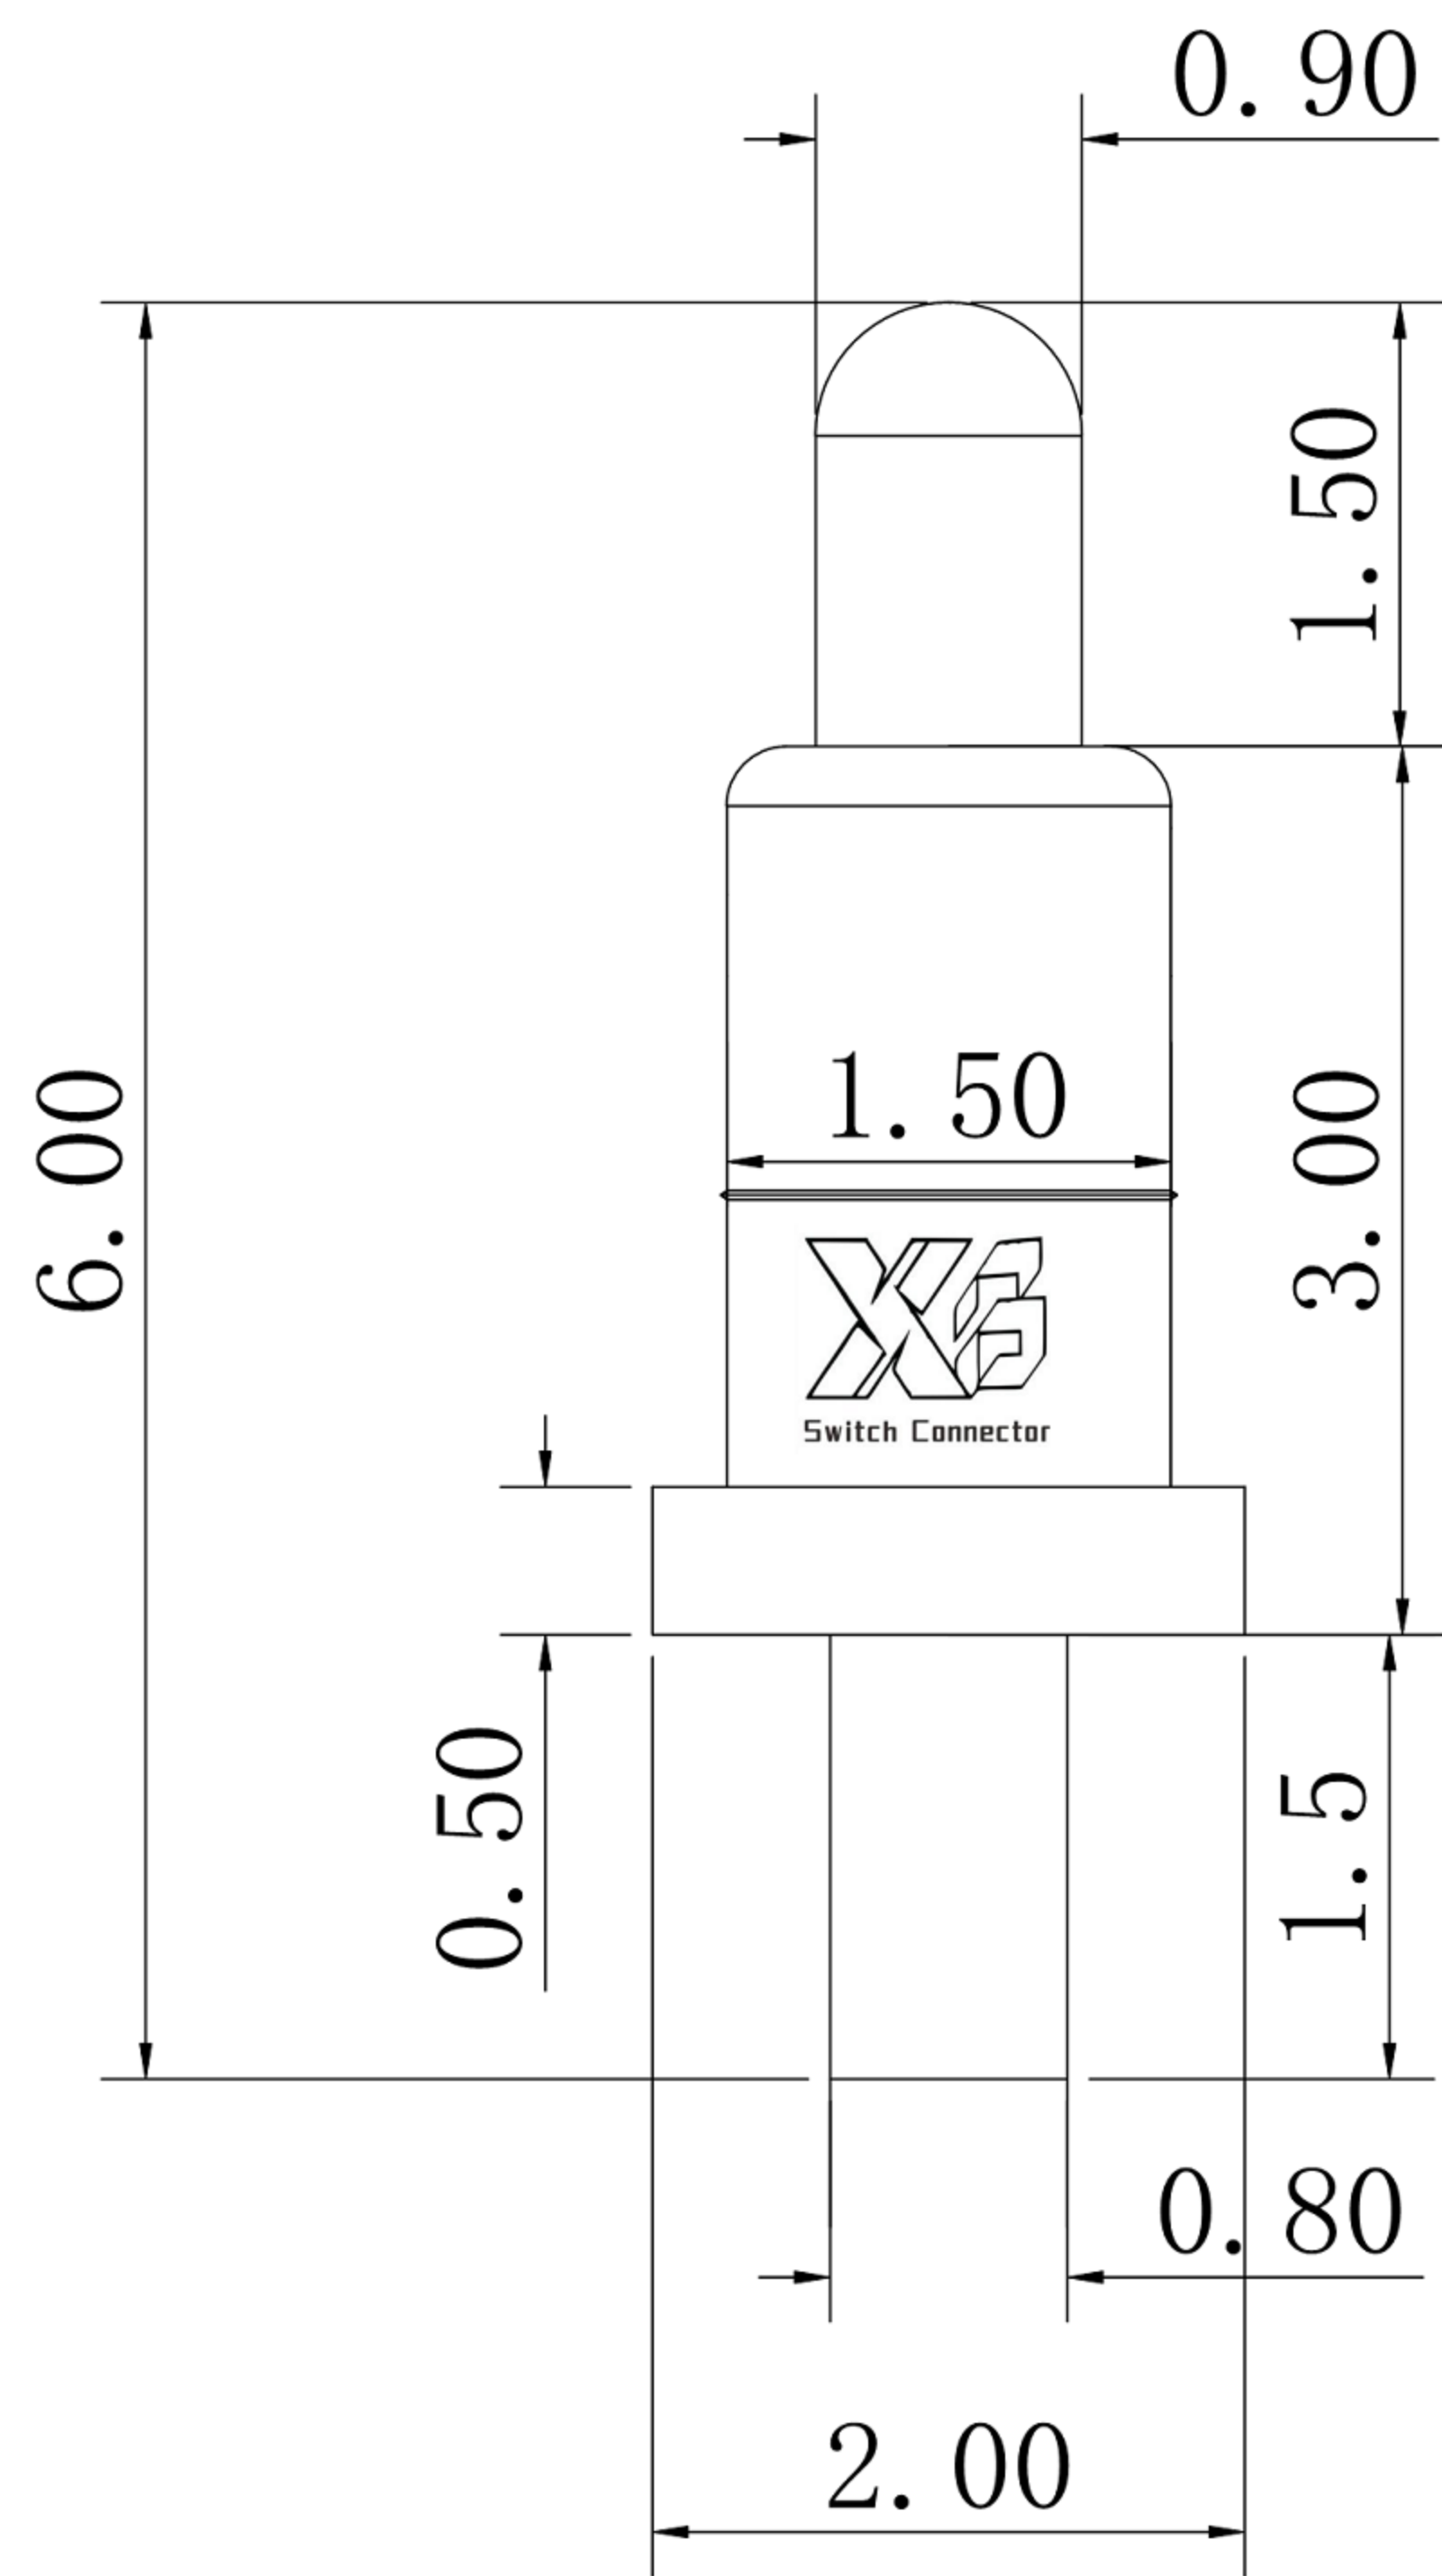

NOTE

1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46

2.Plating
Plunger: Au over NI
Barrel: Au over NI

3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.

4.Mechanical
Spring force: 60g±20% at normal working height
Durability: 10,000 cycles(minimum)

5.To ensure the best usage,please operateit based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression

6.To avoid arcing issue, The adaptor startto power supply after connector mated fully.

ITEM NO.	DESCRIPTION	DRAWN	DATE	Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle ±0.2 ±0.3 ±0.4 ±0.5 ±0.3°
----------	-------------	-------	------	---	--