

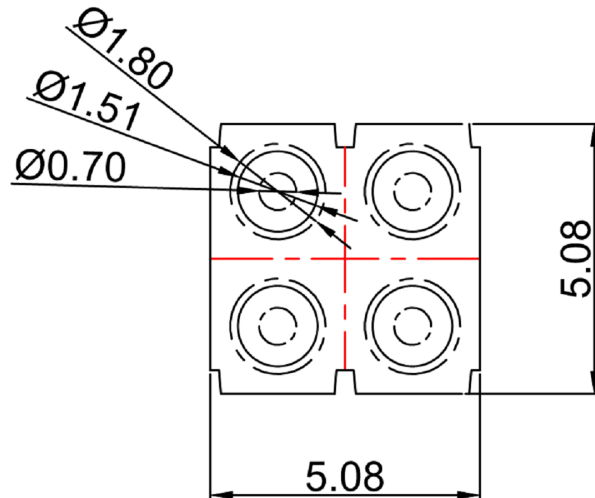


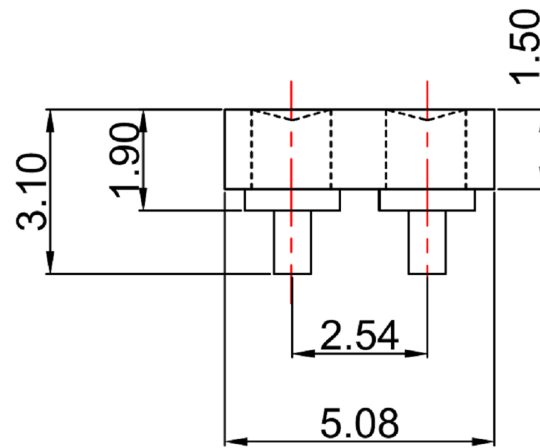

NOTE

- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
- 2.Plating
Plunger: Au over NI
Barrel: Au over NI
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Spring force: 60g±20% at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operate it based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression
- 6.To avoid arcing issue, The adaptor start to power supply after connector mated fully.

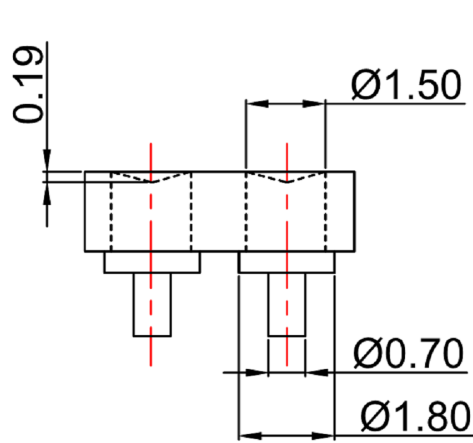

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

Switch Connector

Tolerance Unless
Otherwise Stated:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS MM

DRAWN BY: Jack Lu
DATE: 04/01/21
CHECKED BY: Jacky Chen
DATE: 04/01/21
APPROVED BY: Tony Kao
DATE: 04/01/21

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	POGO PIN
SCALE	1 : 1	DWG NO. XB-PGC-SP-254-4PA-M
SHEET NO.	1 of 1	PART NO. Thimble Connector

SIZE
A4
VER
R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------