

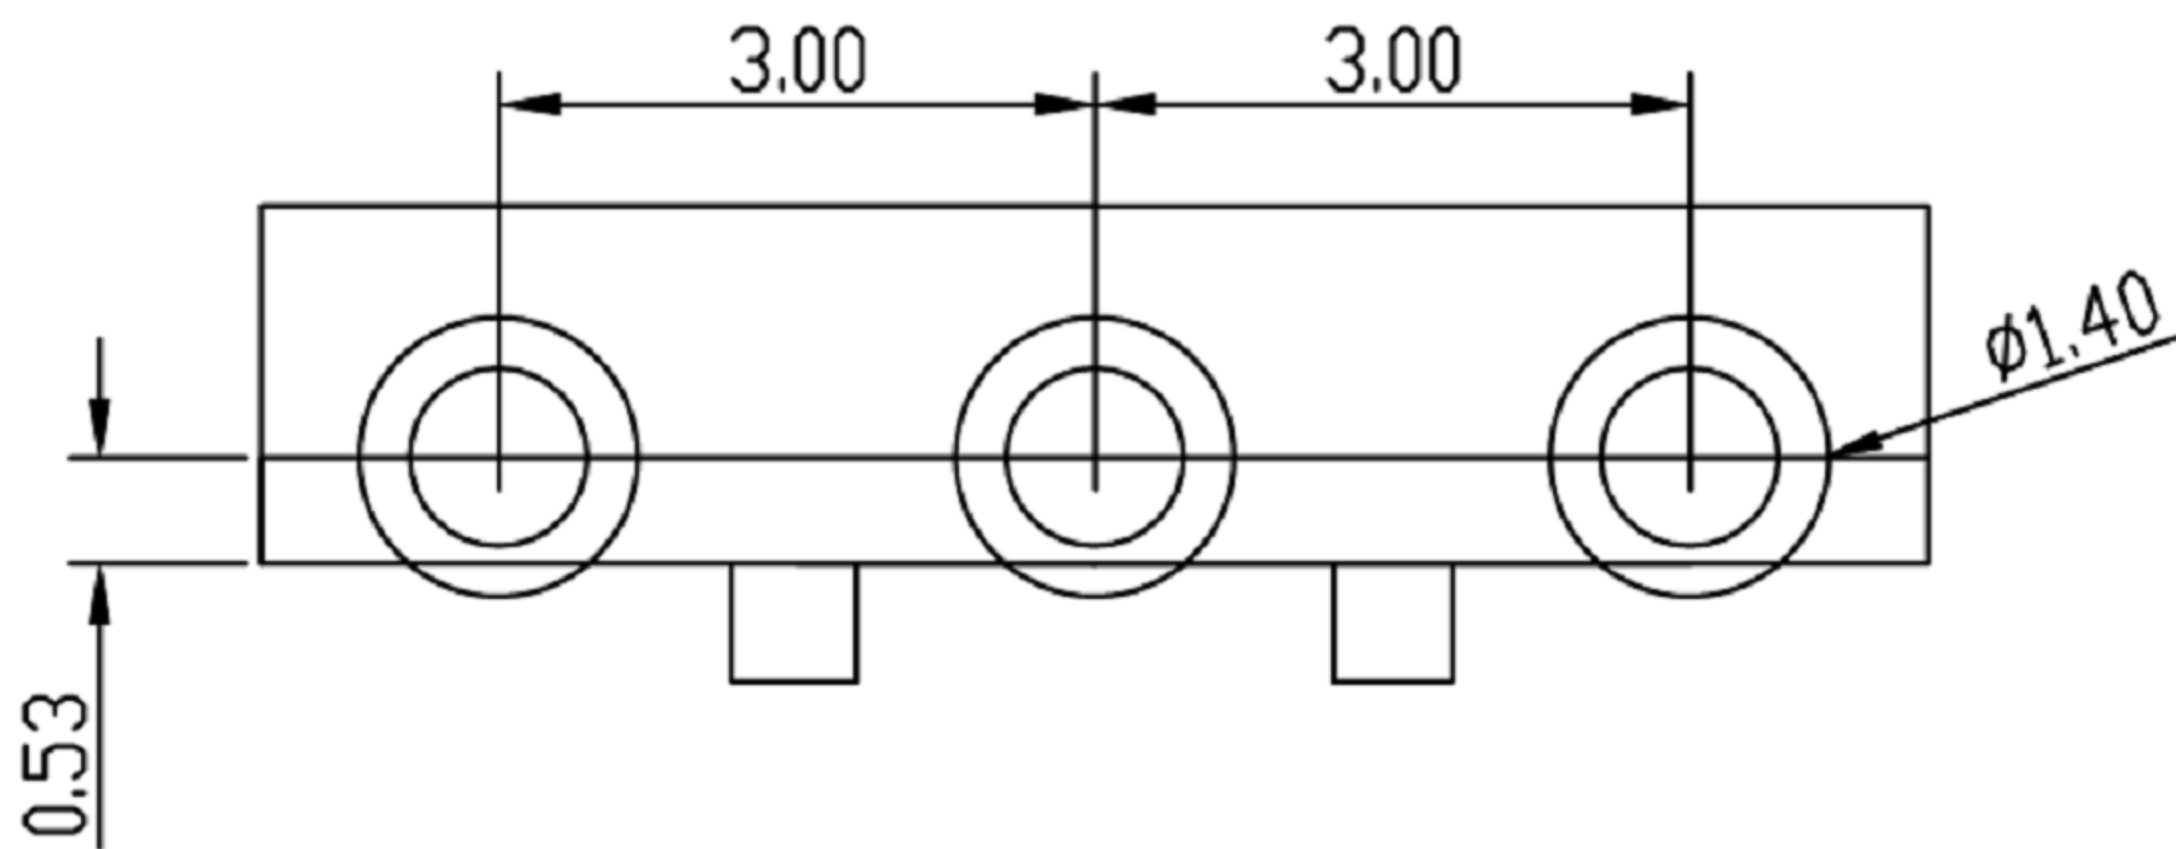
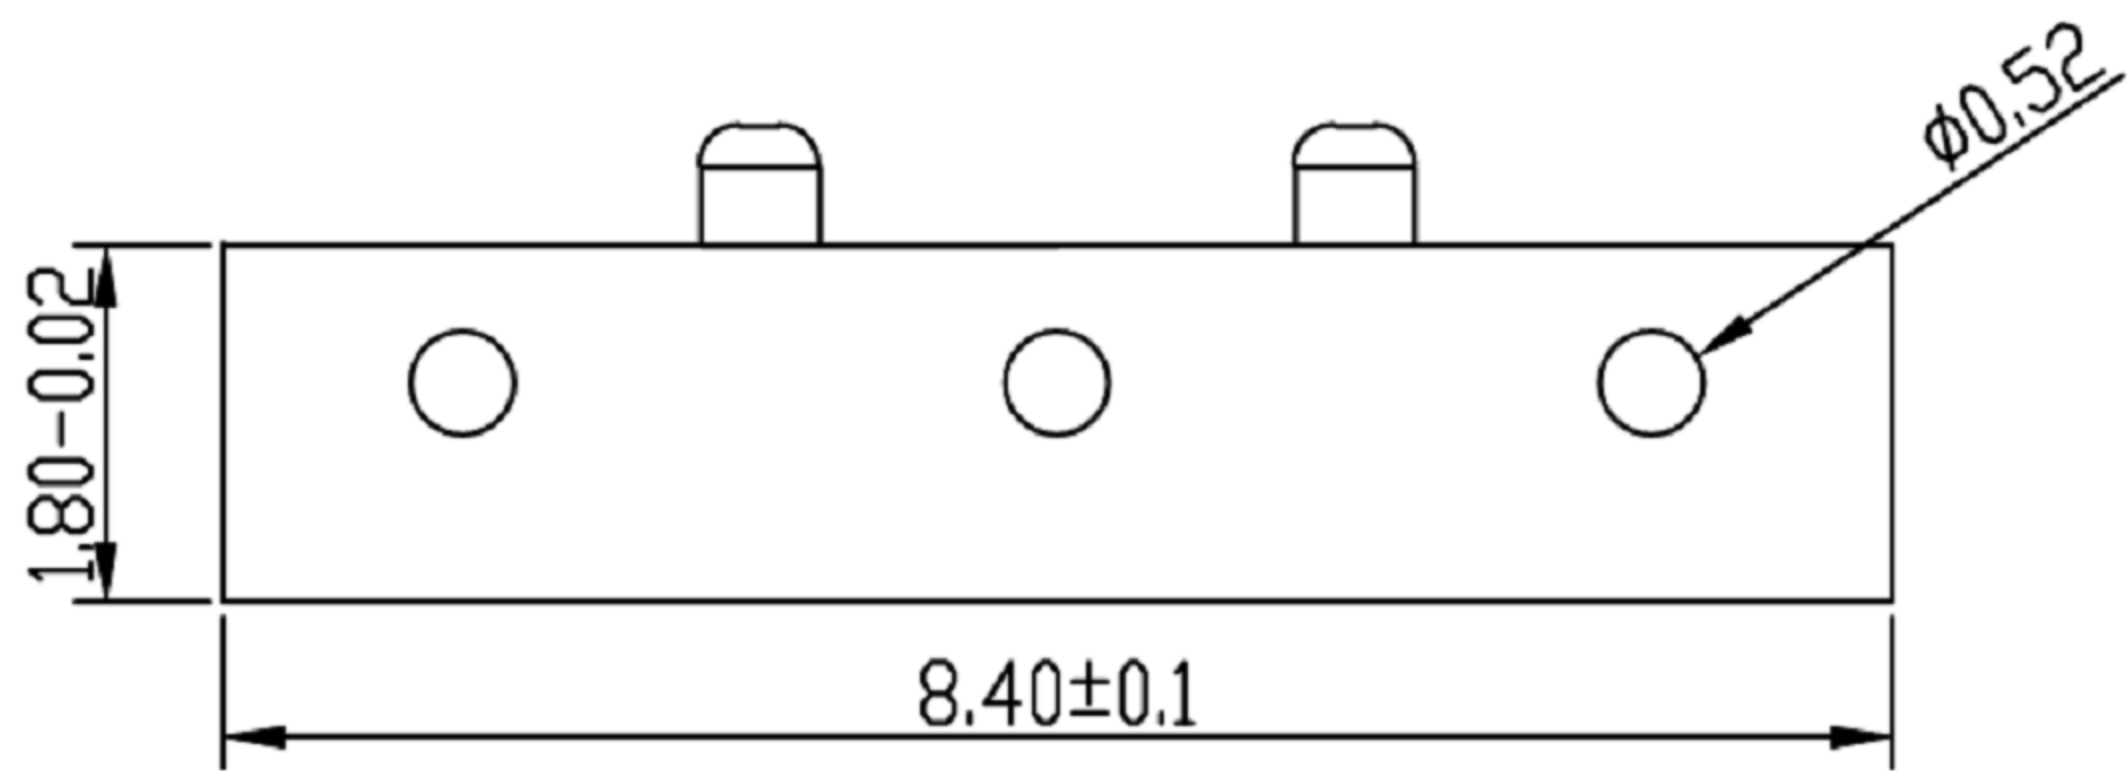


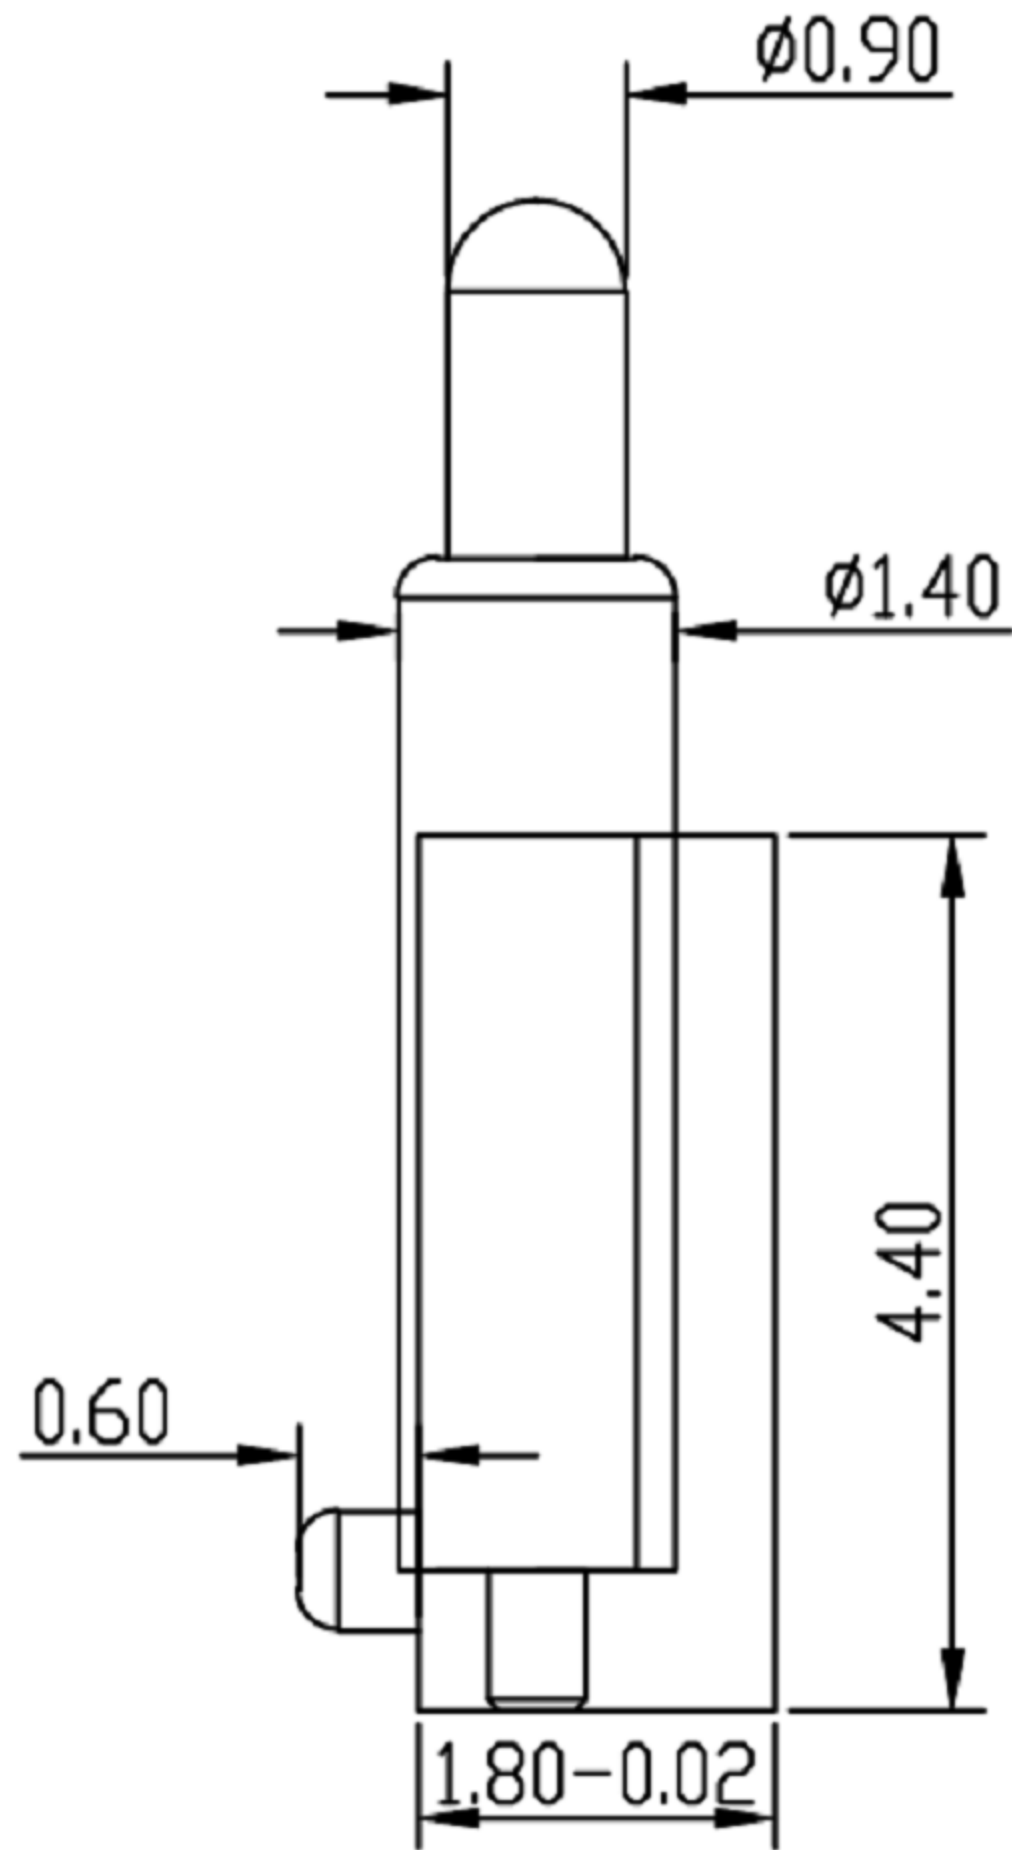


- NOTE
- 1.Material
Plunger: Brass
Barrel: Brass
Spring: SUS
Housing: PA46
 - 2.Plating
Plunger: Au over NI
Barrel: Au over NI
 - 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
 - 4.Mechanical
Spring force: 60g±20% at normal working height
Durability: 10,000 cycles(minimum)
 - 5.To ensure the best usage,please operateit based on the working height Based on the engineering drawings,shall not exceed the maximum allowed compression
 - 6.To avoid arcing issue, The adaptor startto power supply after connector mated fully.

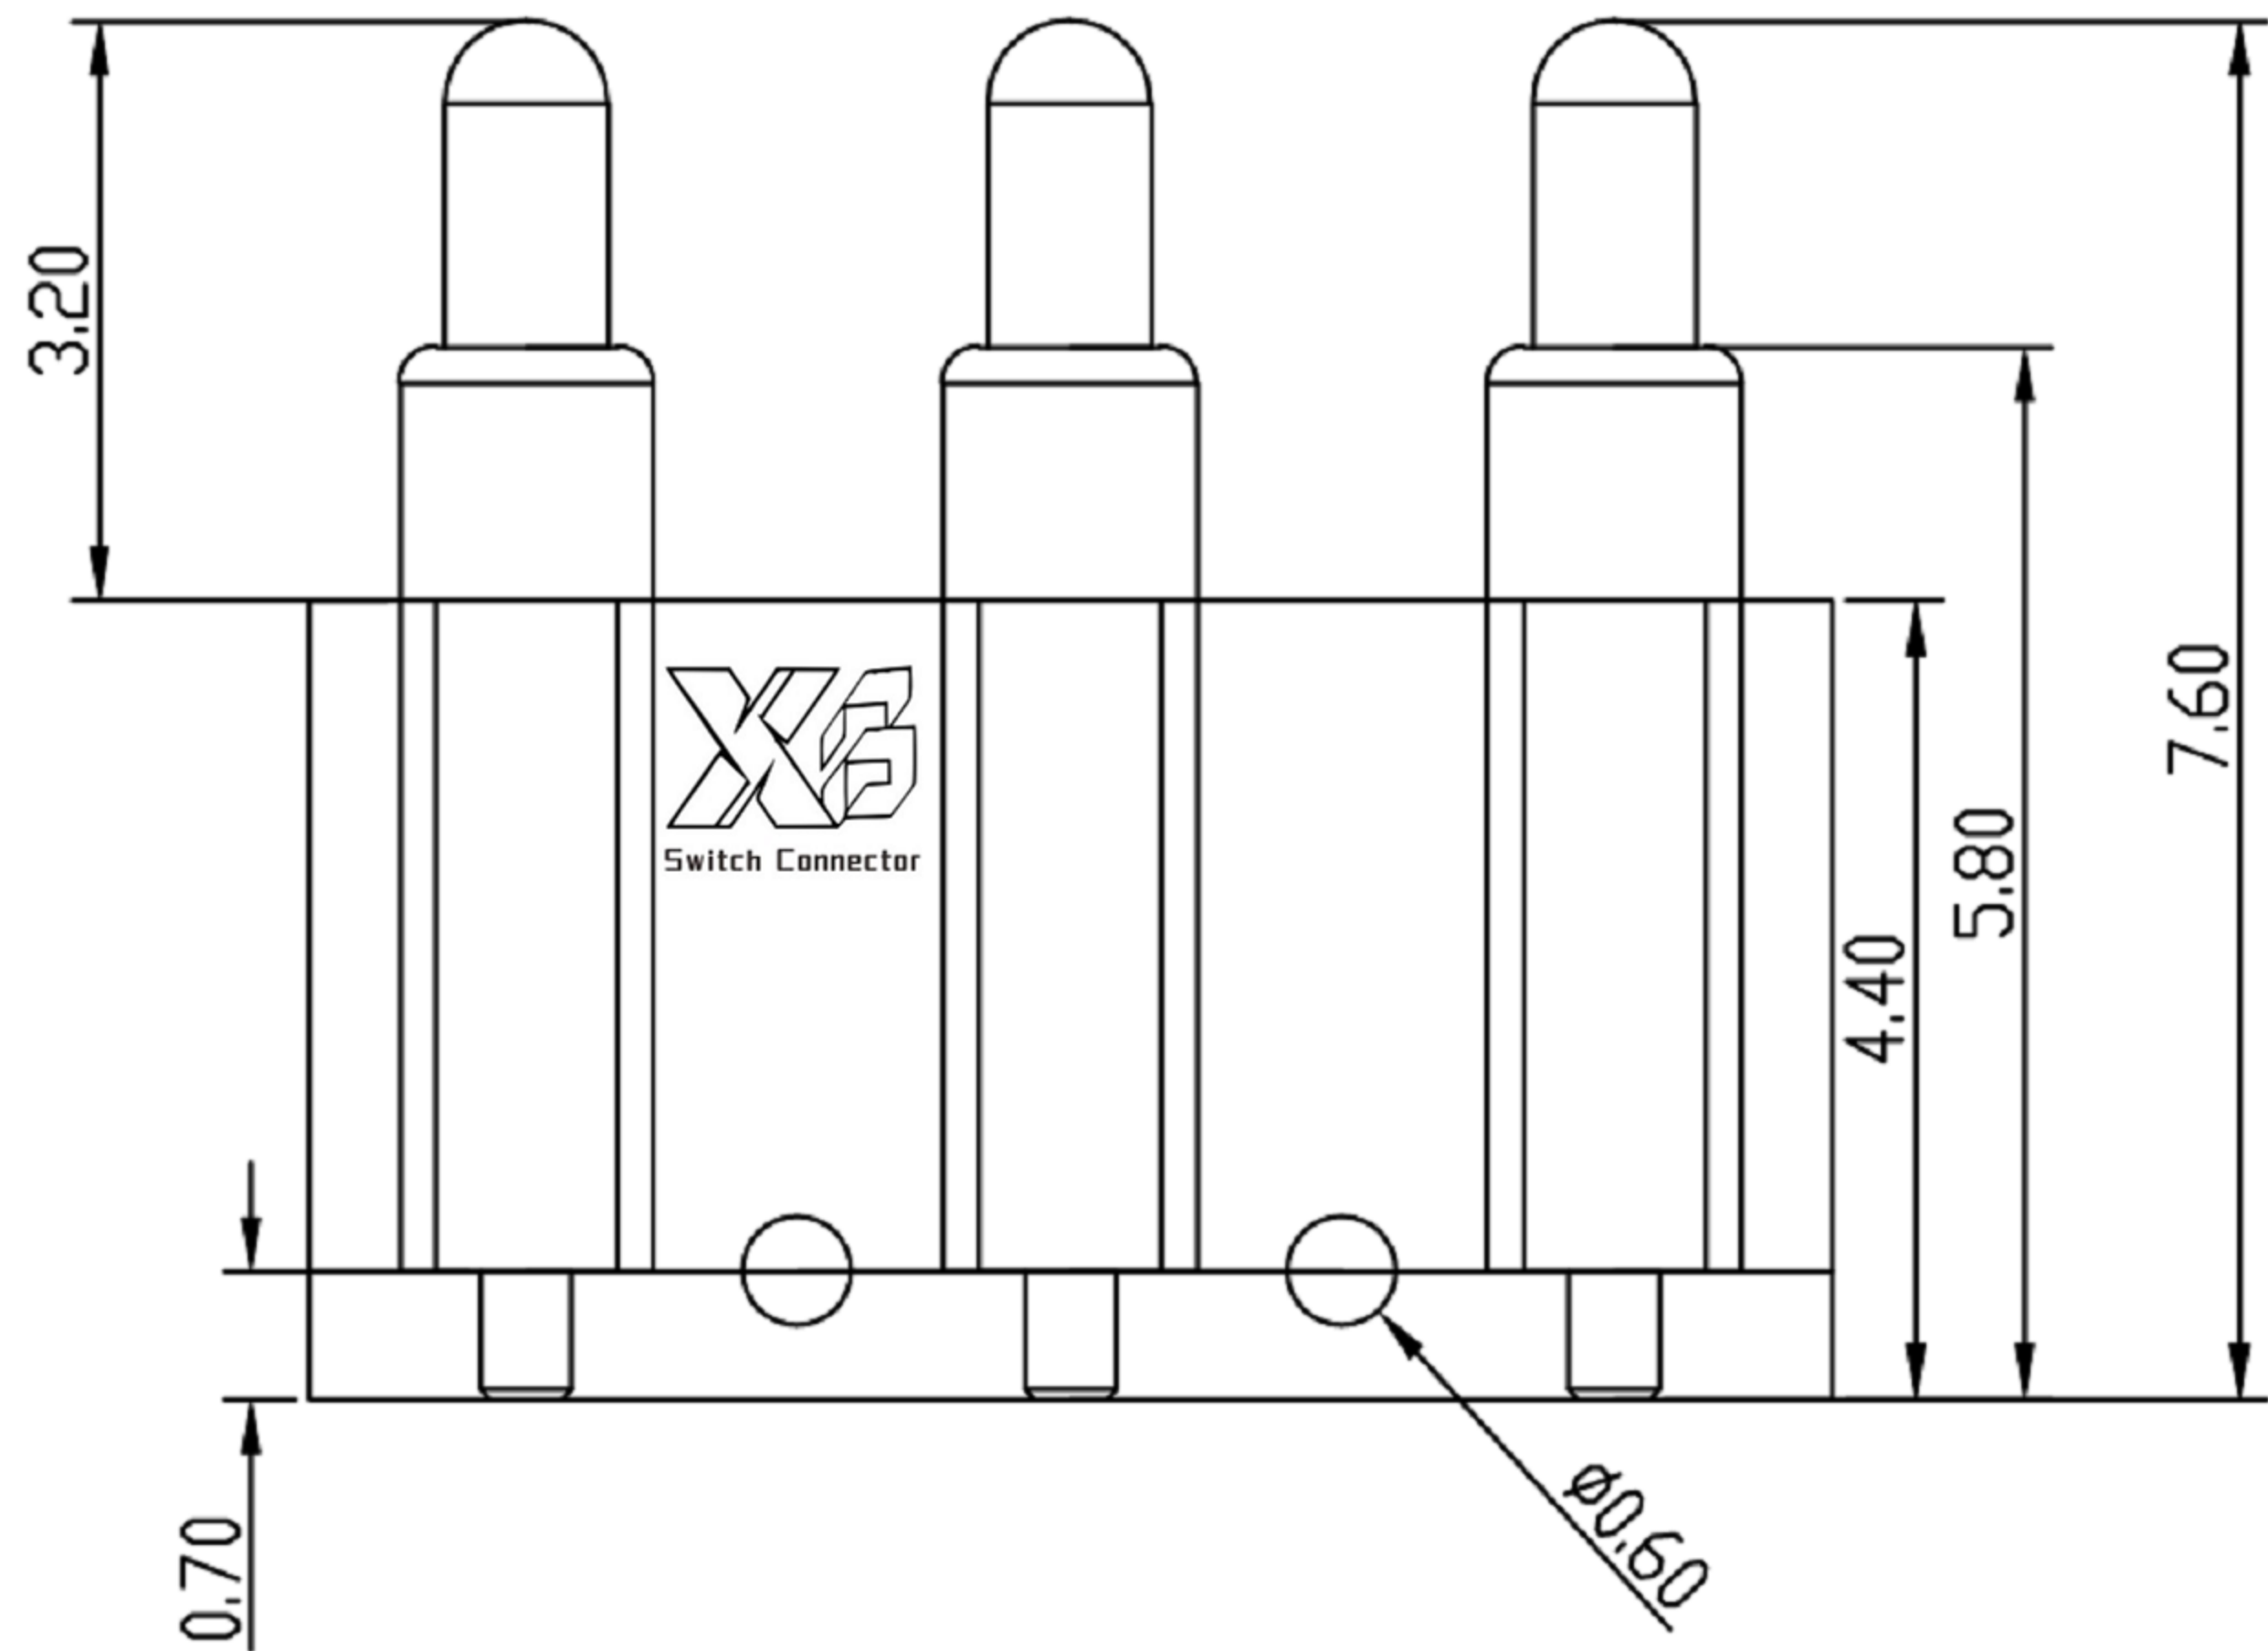

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONI CS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ± 0.2	3RD. ANGEL'S		UNITS	MM
		Above 5 ~ 15 ± 0.3				
		Above 15 ~ 30 ± 0.4				
		Above 30 ~ 50 ± 0.5				
		Angle ± 0.3°				

DRAWN BY:		DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu		04/01/21					
CHECKED BY:		DATE	FINISH		MODLE	POGO PIN	
Jacky Chen		04/01/21					
APPROVED BY:		DATE	SCALE	1 : 1	DWG NO.	XB-PGC-X-300-3P-G	SIZE
Tony Kao		04/01/21					SHEET NO.
							VER
							R