


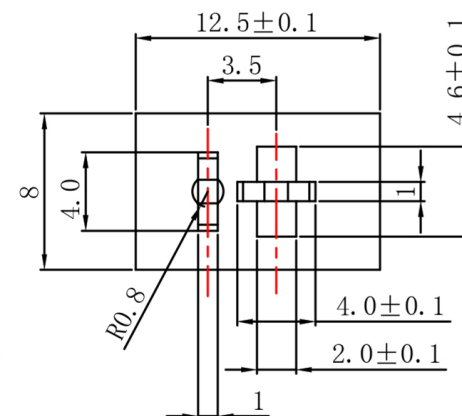

Technology Request:

- 1.Outlook:
No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:
Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3~3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

1. 绝缘阻抗测试: DC500V, 100M Ω 无异状。
2. 耐压测试: AC500V, 漏电流0.5mA, 1分钟无异状。
3. 绝缘体无缺胶、杂物、缩水、毛边等现象。
4. 插拔力测试: 用01公头(公头插片厚度1.5mm, PIN针 ϕ 1.5mm)与母座对插插拔力在0.3KG~3KG之间。

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
比例 Scale	5:1		6							
			5							
视图 Third angle projection	xx.:±0.3		4							
		3		H65	Ni 1~3um					
	x.x.:±0.1	2		C3602	Ni 1~3um	贺龙飞	赖海杰	龙柳婷	规格 DESCRIPTION:	DC Power Jack
		1	PLASTIC	PBT	BLACK				品名 P/N:	XB-DC-10197
									NO.	PART