
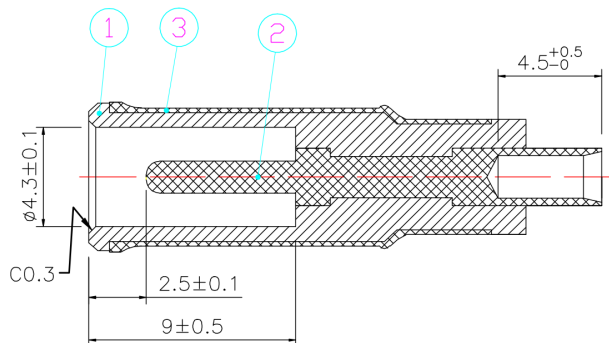

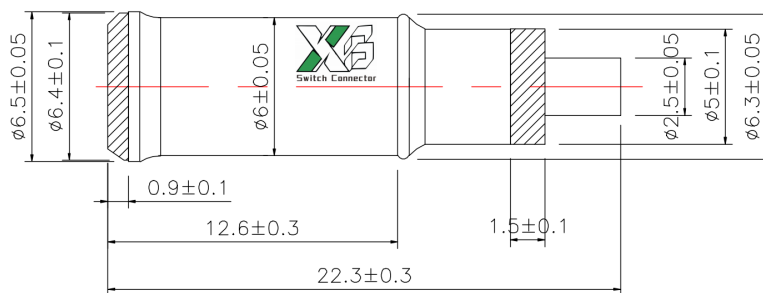


ROHS



Technology Request:

1.Outlook:

No burr, no hurt.

2.Electronic performance:

a:Insulation resistance:

Above DC500V/100MQ;

b:Endure voltage:

AC500V at 1 minute;

c:Contact resistance:

Under 30mΩ;

3.Insertion force & withdrawal force:

0.3~3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			
比例 Scale	5:1	xx.:±0.3	6			
视图 Third angle projection		x.x.:±0.1	5			
		.xx.:±0.05	4			
			3	6.5*6*16.7 端子管	H65	Ni 1~3um
			2	1.4*2.5*19.8 铆料针	C3602	Ni 1~3um
			1	PLASTIC	PBT	BLACK
			NO.	PART	MATERIAL	PLATING

核准
APPROVED BY校对
CHECKED BY制图
DRAWN BY东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:

DC PLUG Ø6.5*Ø1.4*22.3

品名 P/N:

65P14C223

图号 DRAWN NO:

贺龙飞

赖海杰

龙柳婷