
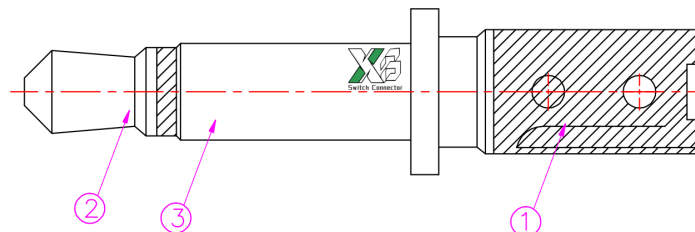

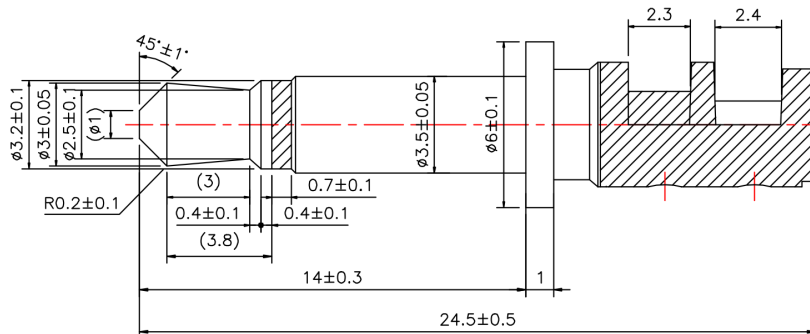


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180818



Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance:
Above DC500V/100M Ω ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:Under 30m Ω ;
3.Insertion force & withdrawal force:
0.3-3kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	6	5	4	3	2	1
比例 Scale	5:1	xx.:±0.3							
视图 Third angle projection		xx.:±0.1							
		xx.:±0.05							
NO.	PART	MATERIAL	PLATING						

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	AUDIO PLUG $\phi 3.5 \times \phi 6.0 \times 24.5$
品名 P/N:	P35260245
图号 DRAWN NO:	