

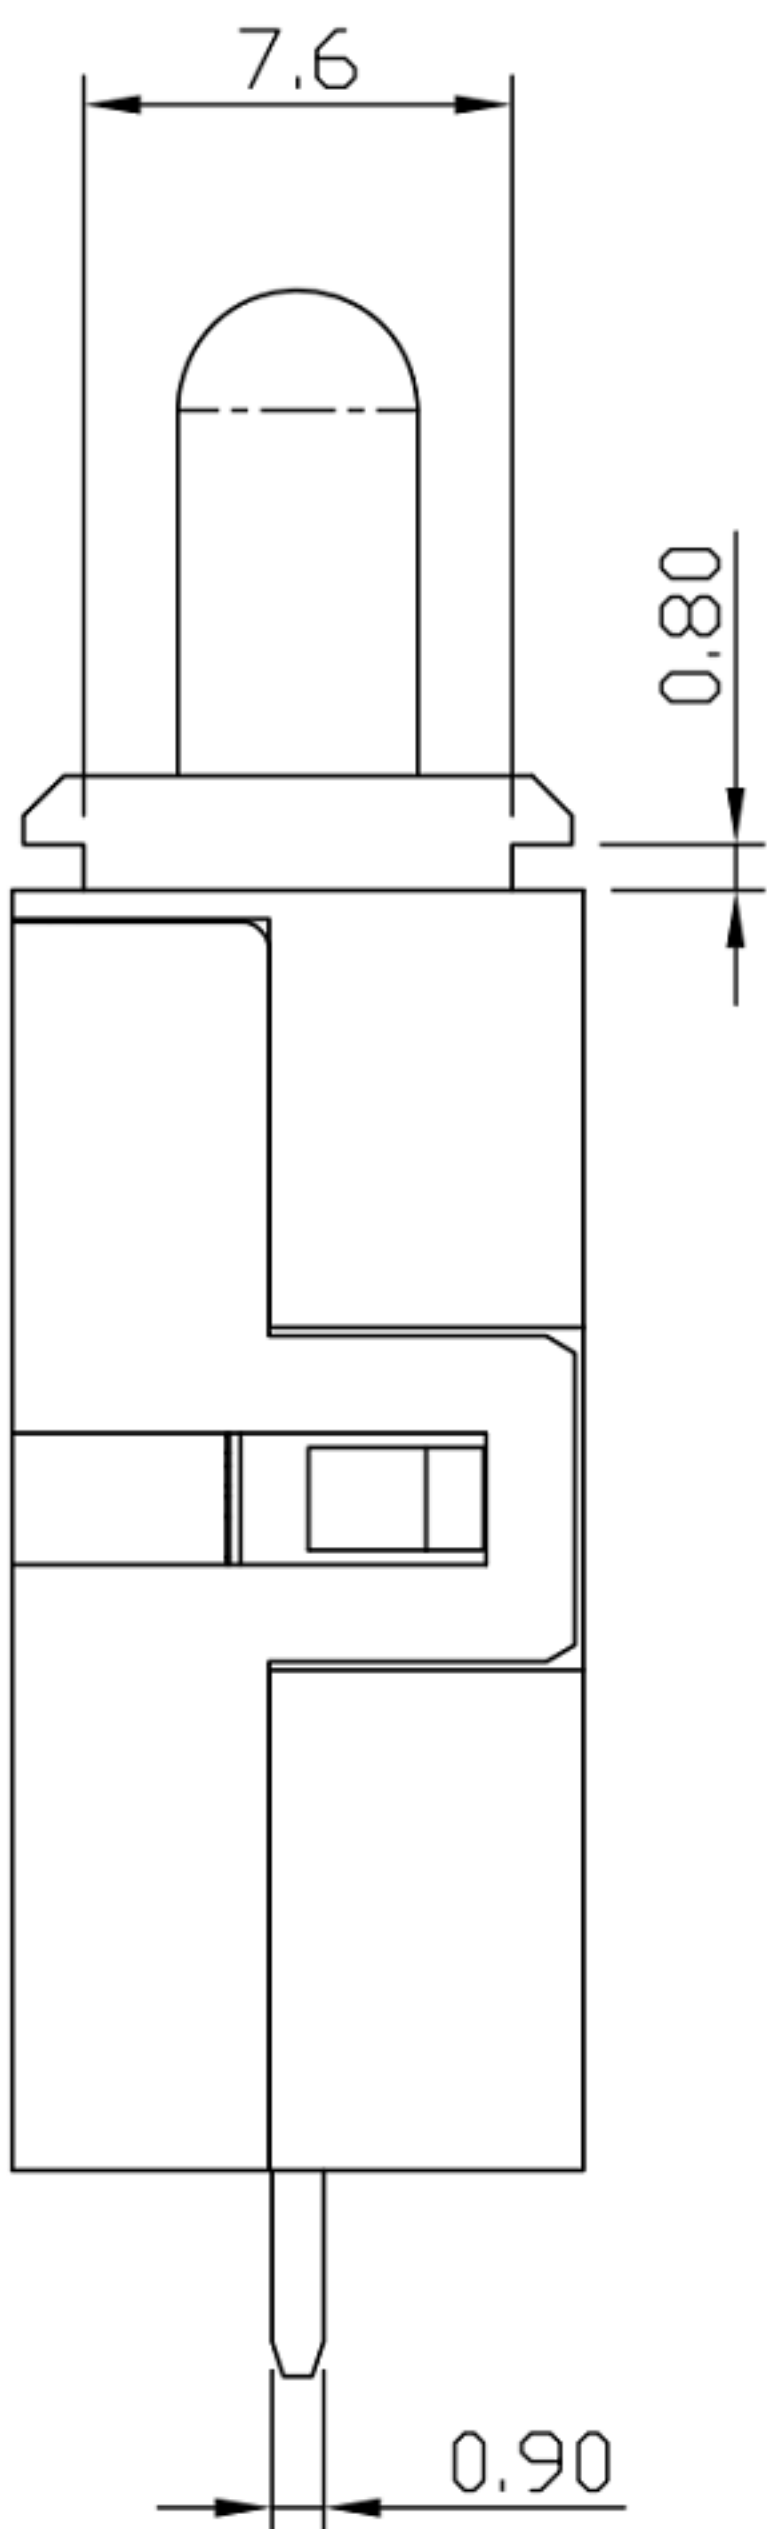
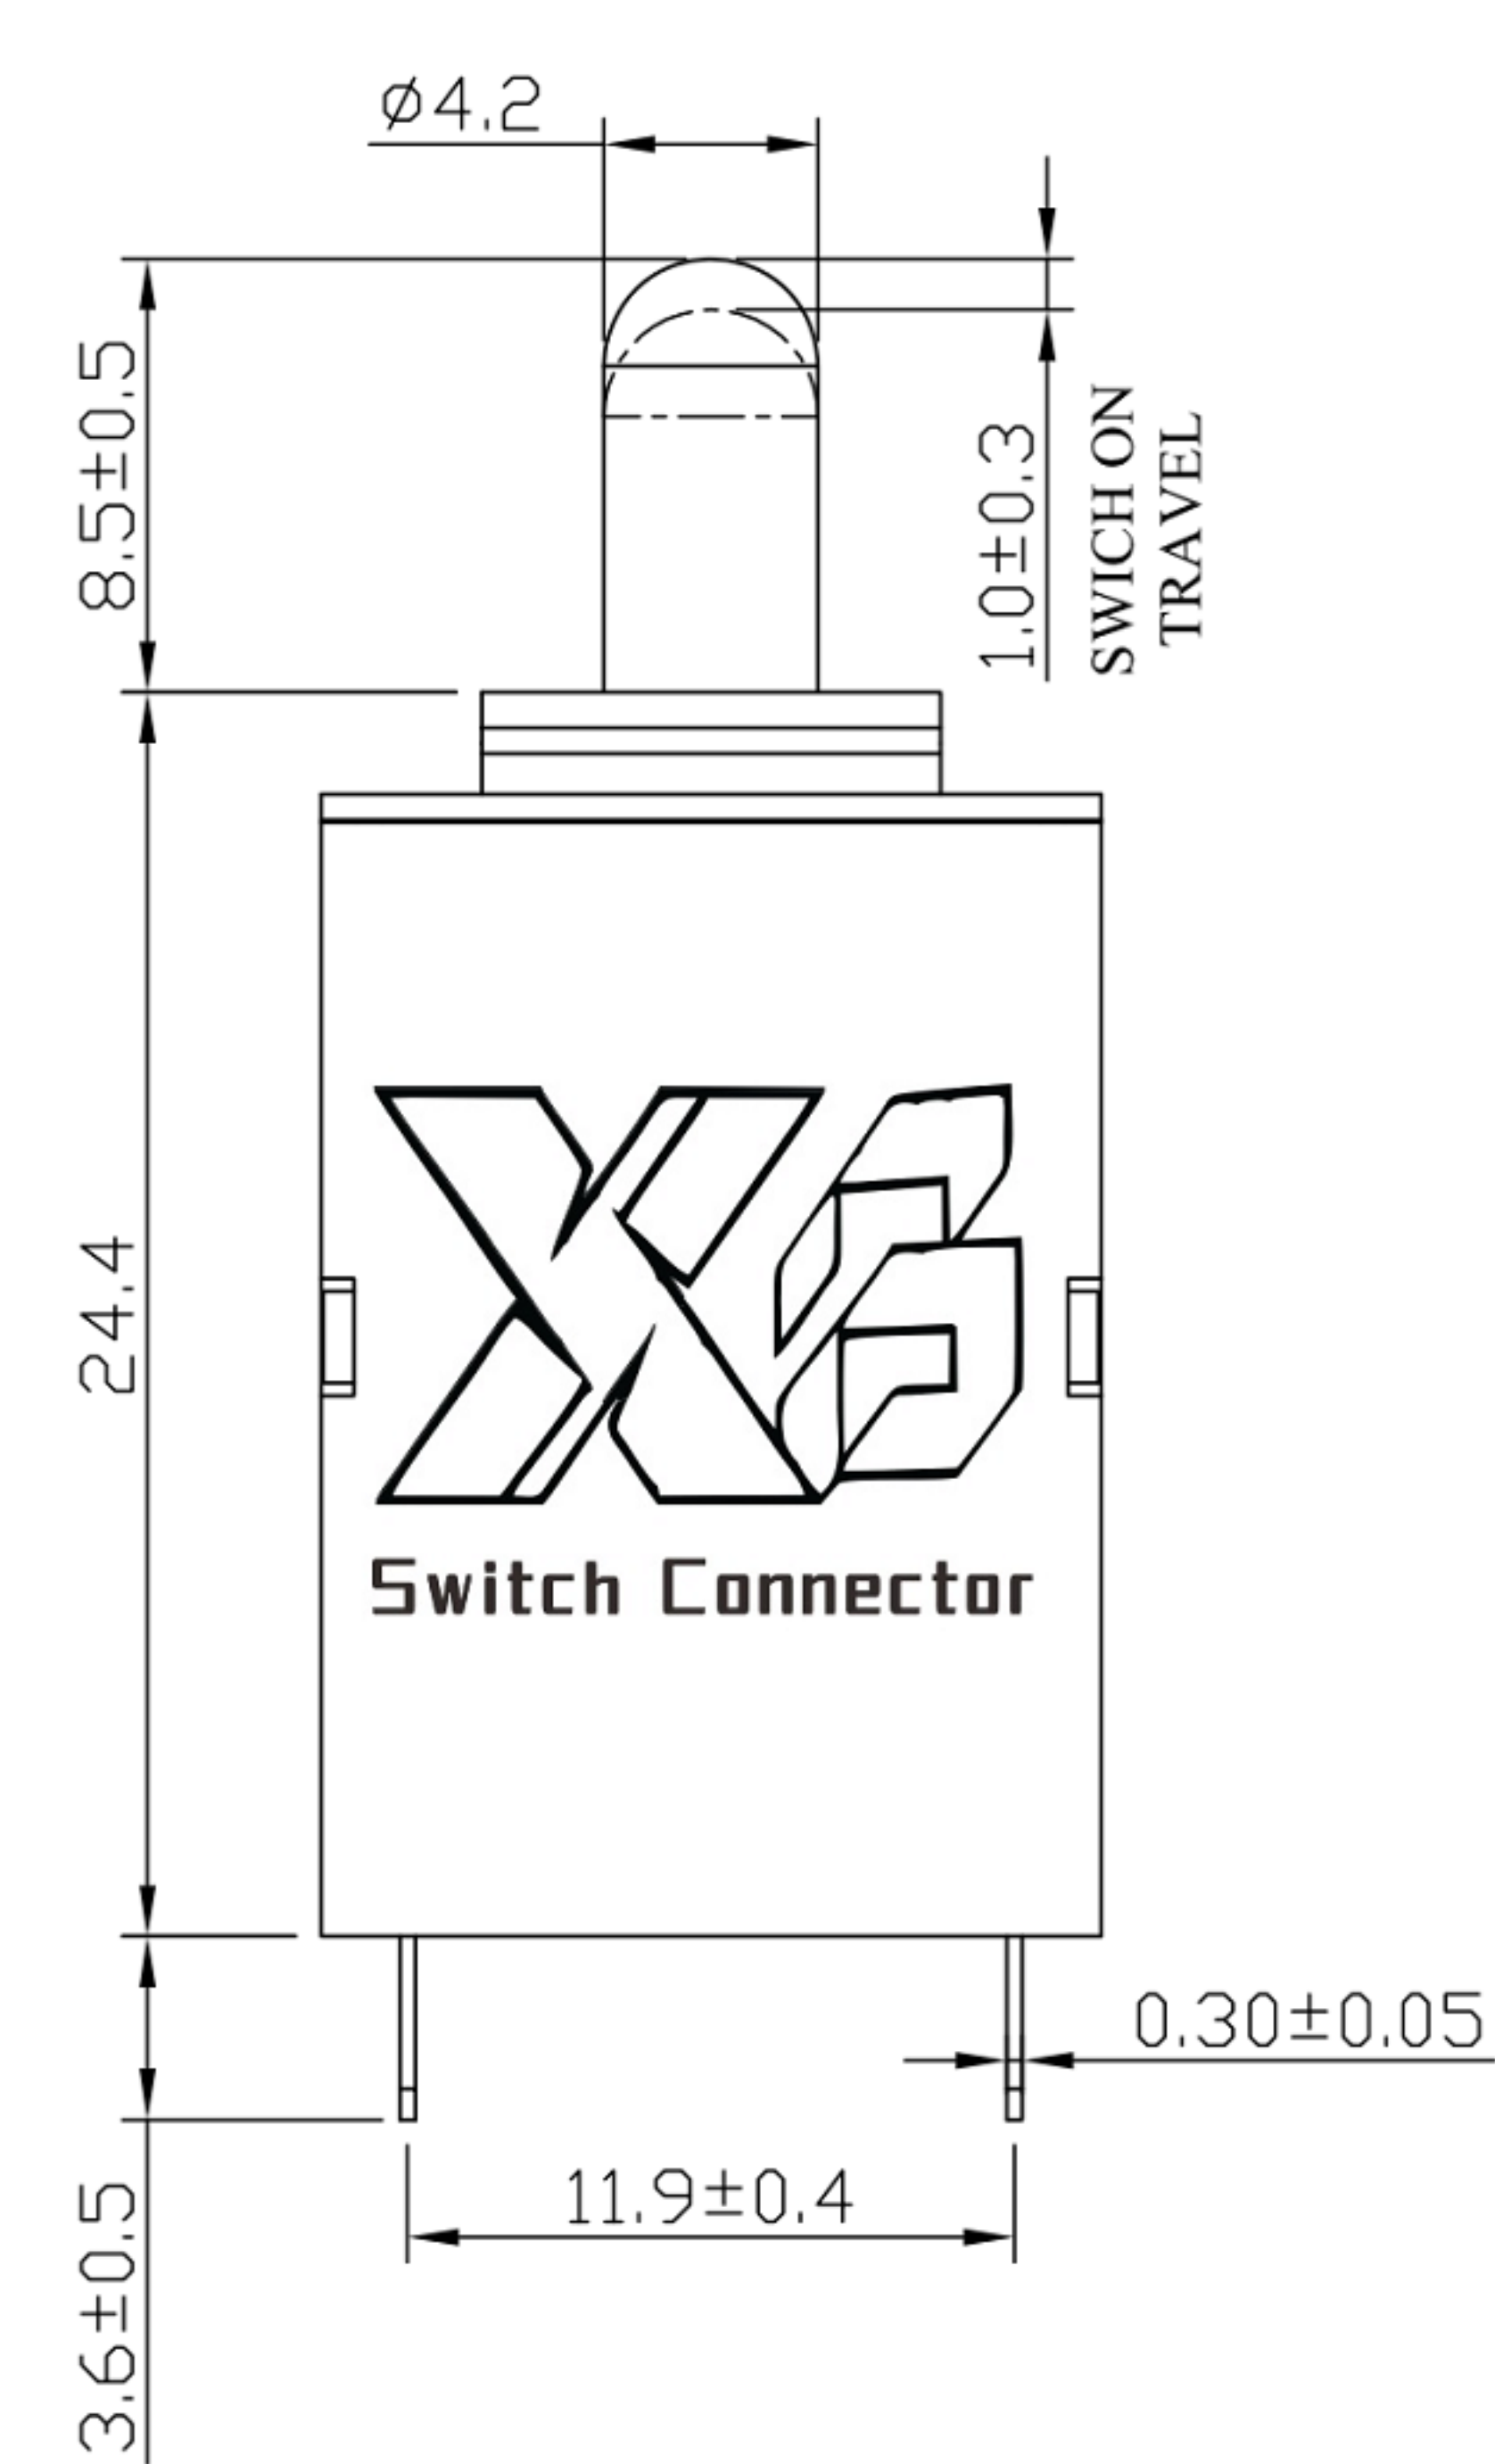


CAD FILE:

ROHS


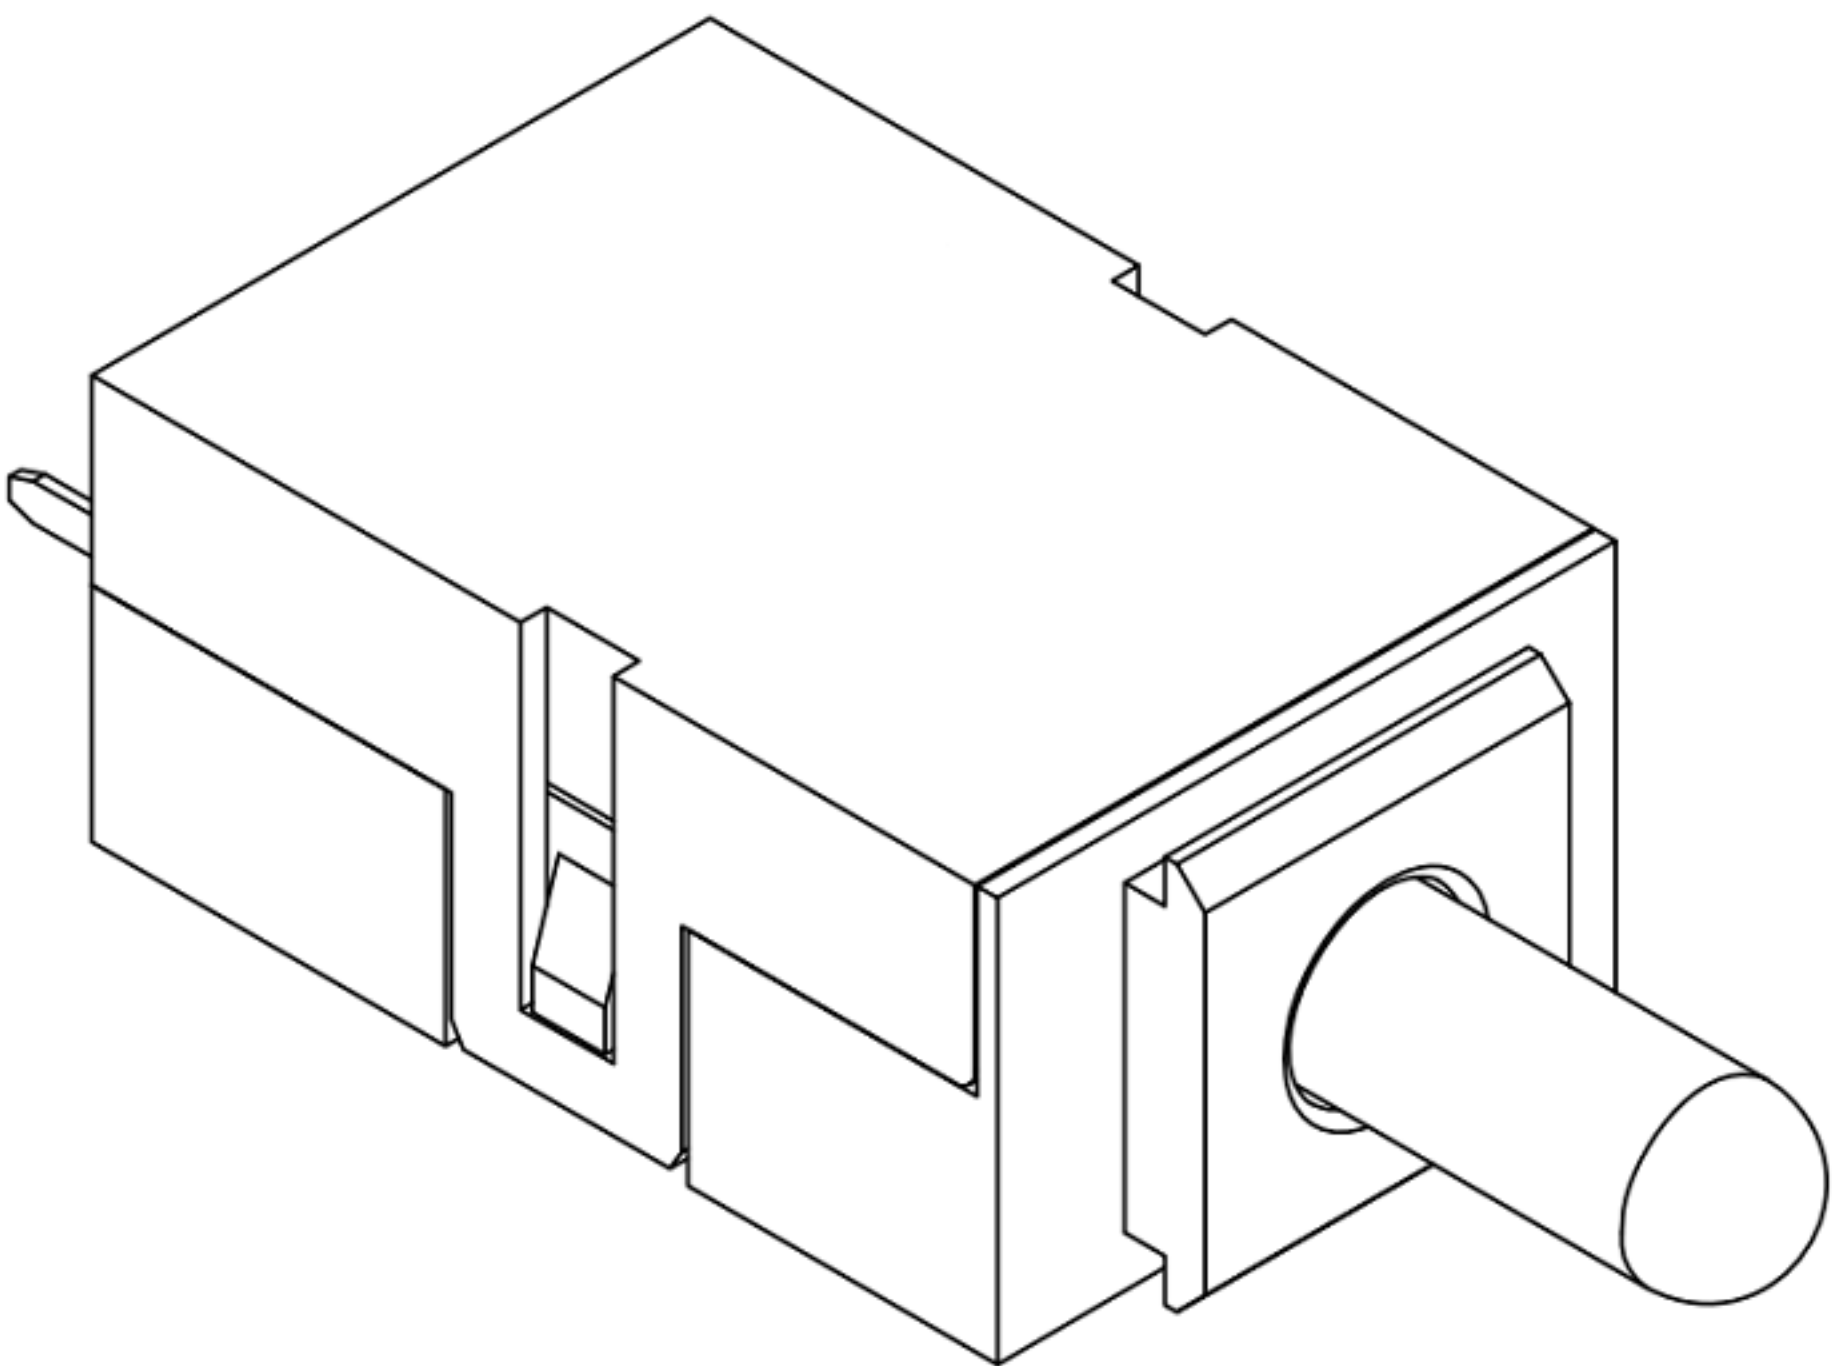


Panel cutout detail maximum panel thickness 0.8mm

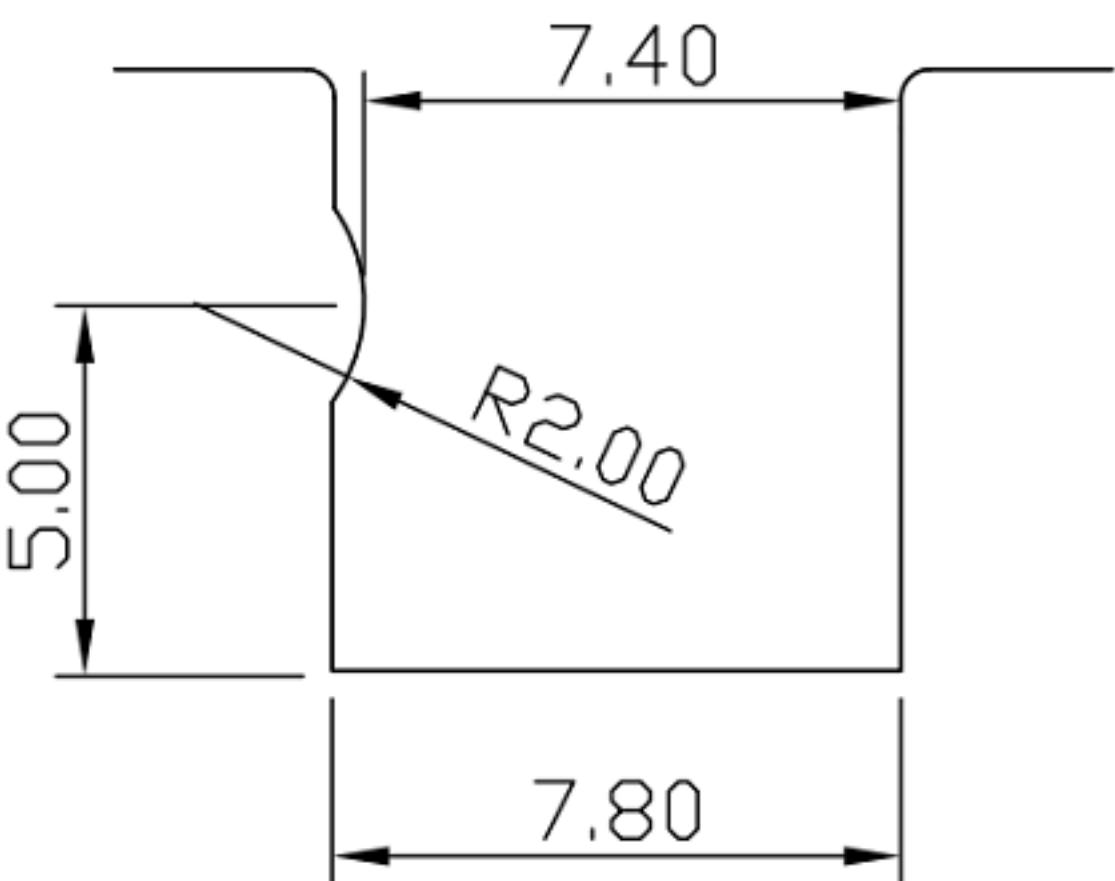


SPECIFICATIONS:
CONTACT RATING: 20VAC/VDC 0.4A Max
CONTACT RESISTANCE: 50mΩ Max
INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
DIELECTRIC STRENGTH: 500VAC(50/60Hz) FOR 1MIN
MECHANICAL LIFE:100,000 make-and-break cycles
OPERATION FORCE: 300g Max.
SWICH ON TRAVEL: 1.0±0.3mm
TOTAL TRAVEL: 8.5±0.5mm
WAVE SOLDERING: Recommended Soldering
Temperature 260°±5°
Duration of Solder Immersion:
5 Seconds max.(PCB is 1.6mm)

P. C. B. LAYOUT

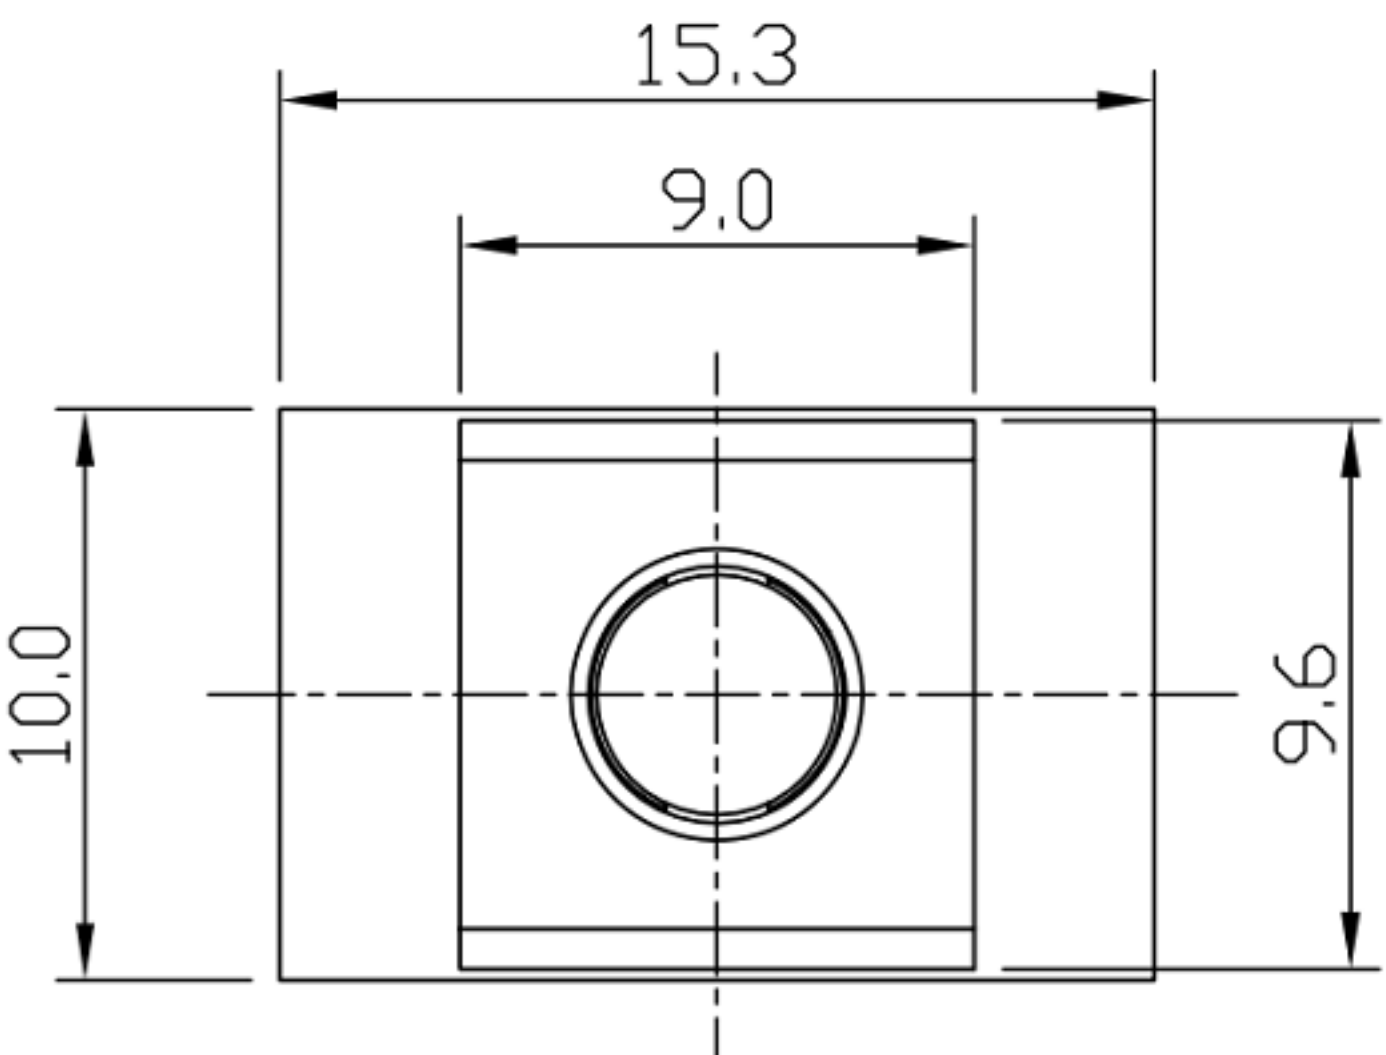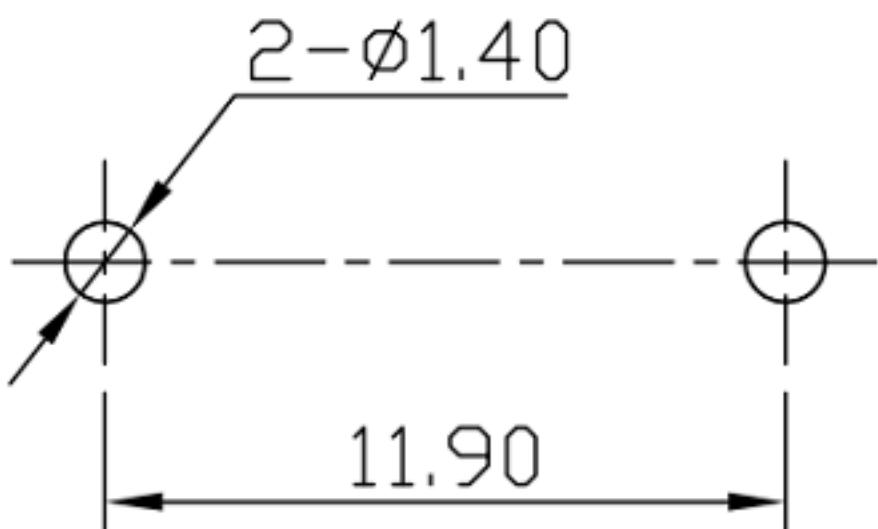

CIRCUIT

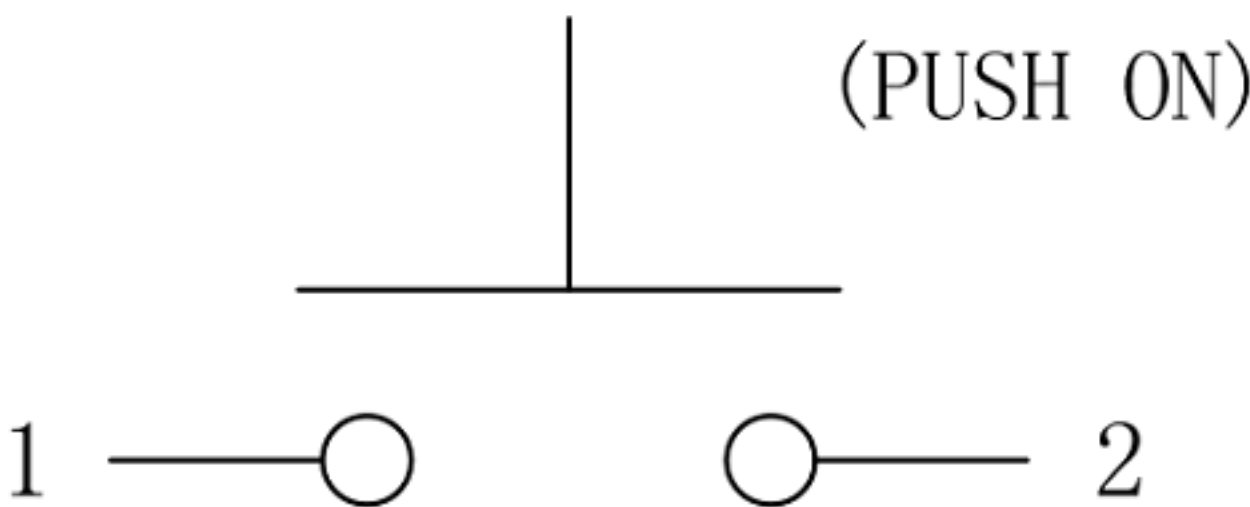

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switch			UNIT : mm	DRWG NO.: XB-RS-PB237-T
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-RS-PB237-T			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					