

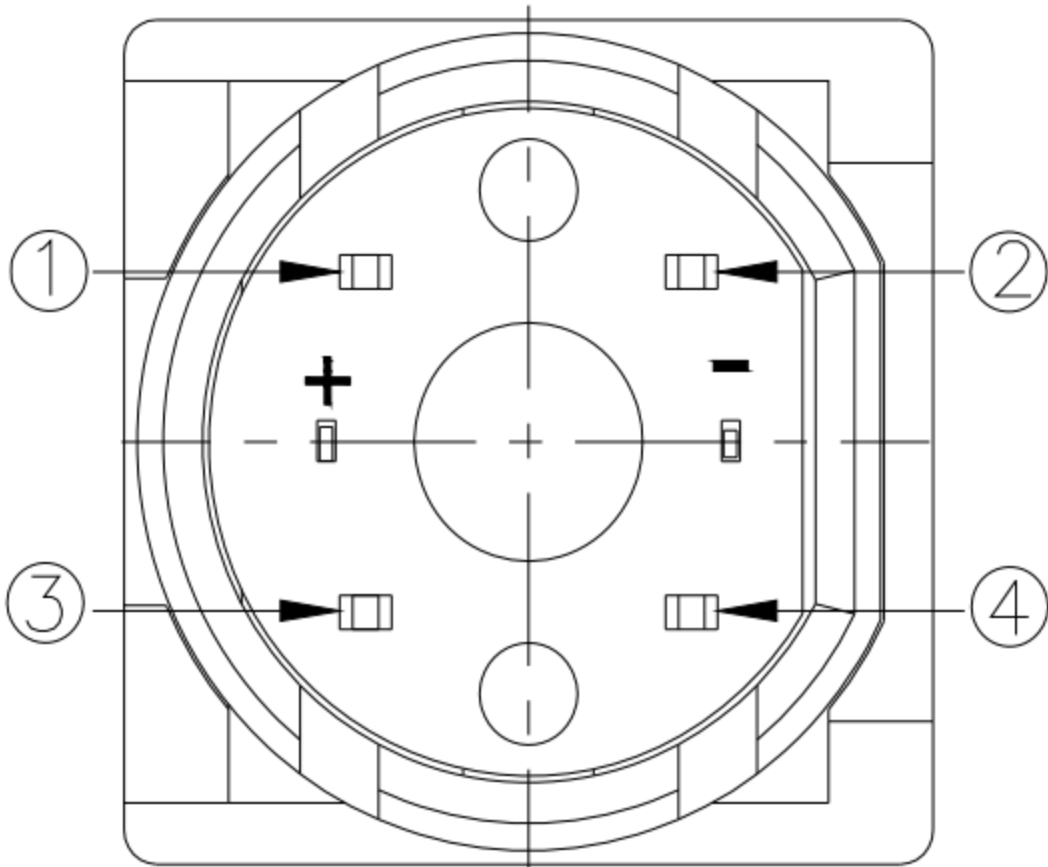


CAD FILE:



ROHS

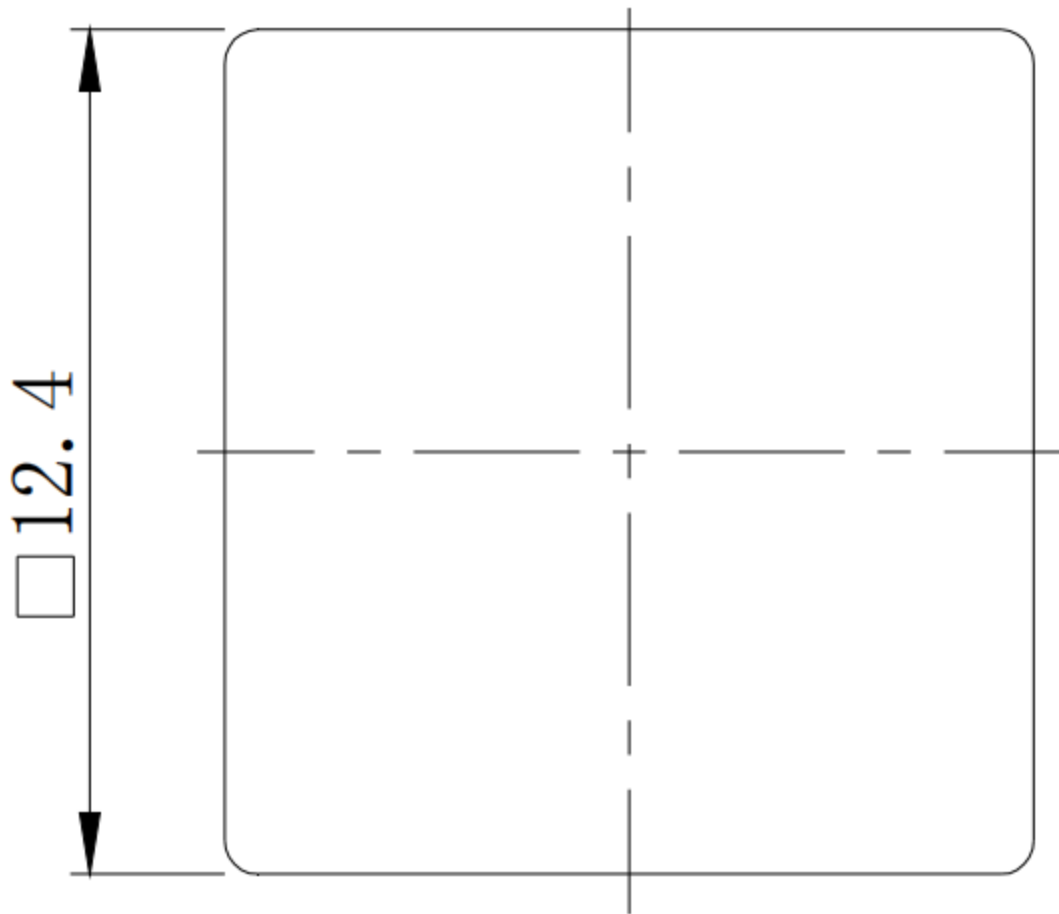

CIRCUIT


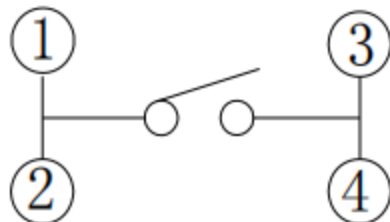


P. C. B. Layout

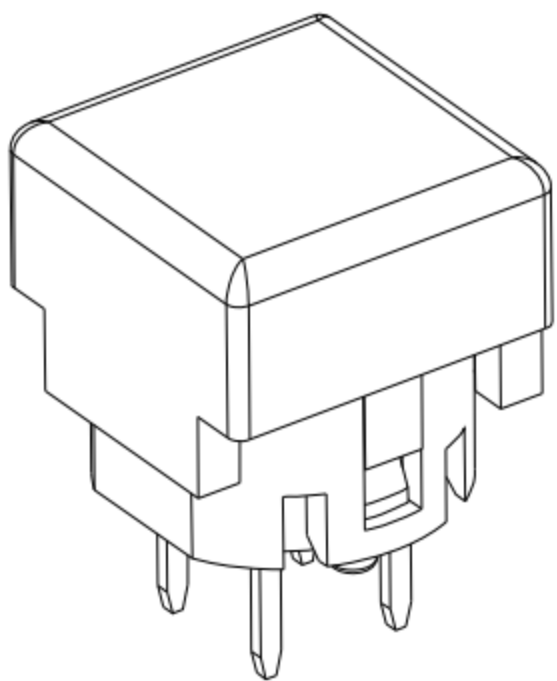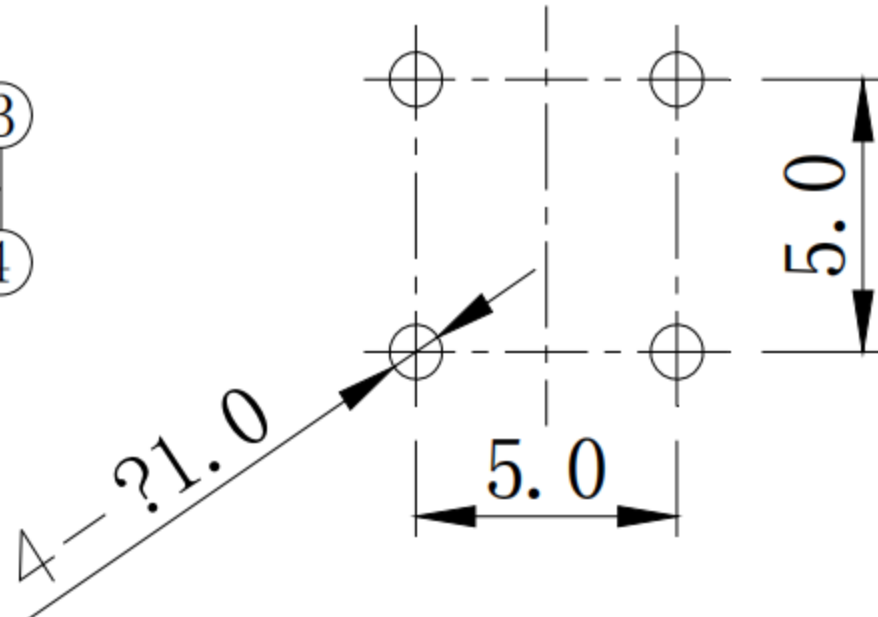

NOTES:

1. RATING: 35VDC 10mA
2. CONTACT RESISTANCE: 50mΩ Max
3. INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
4. DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
5. OPERATE FORCE: 250±80g
6. LIFE TEST: 50,000 CYCLES
7. FULL TRAVEL: 0.8±0.5mm
8. TEMPERATUTE: -20° C~70° C

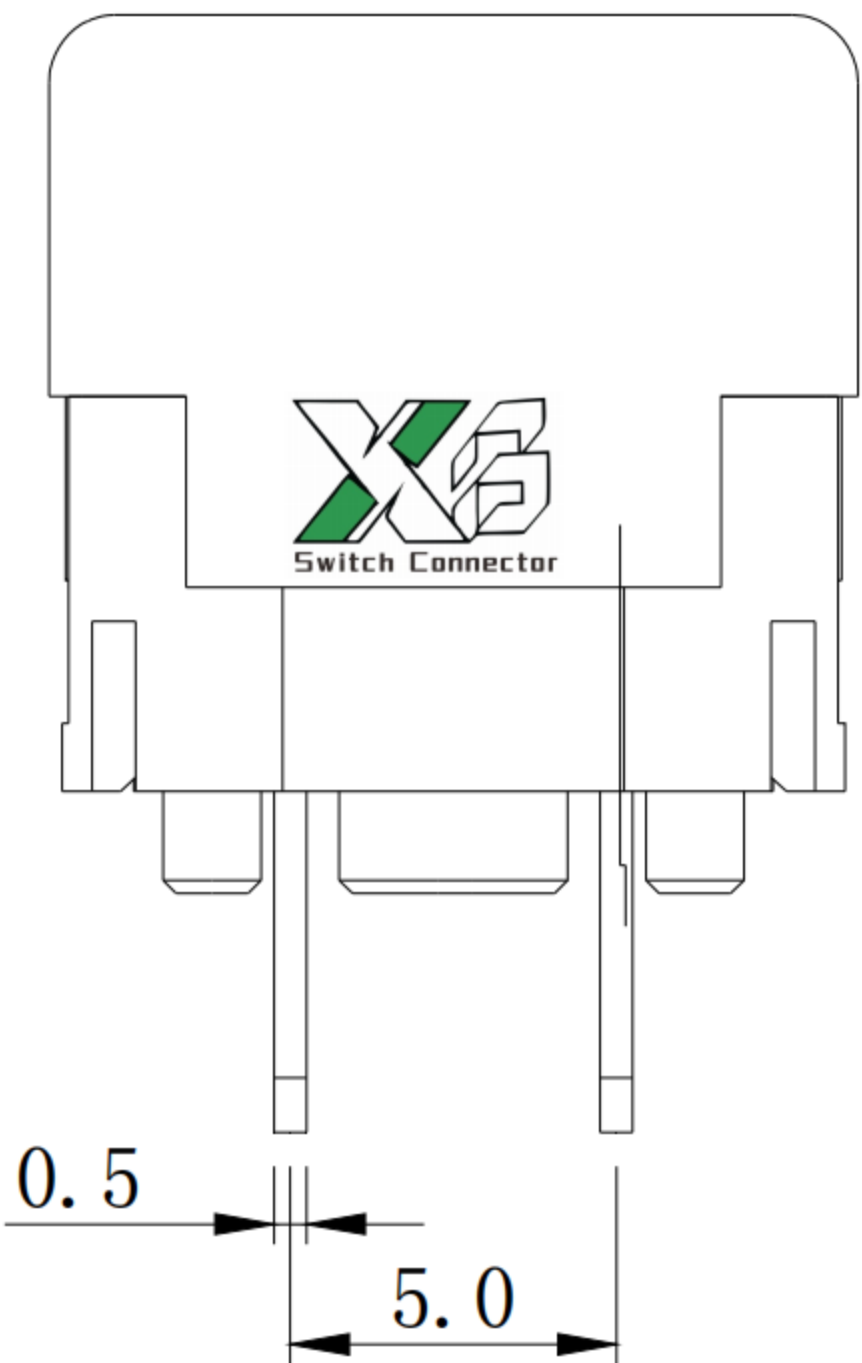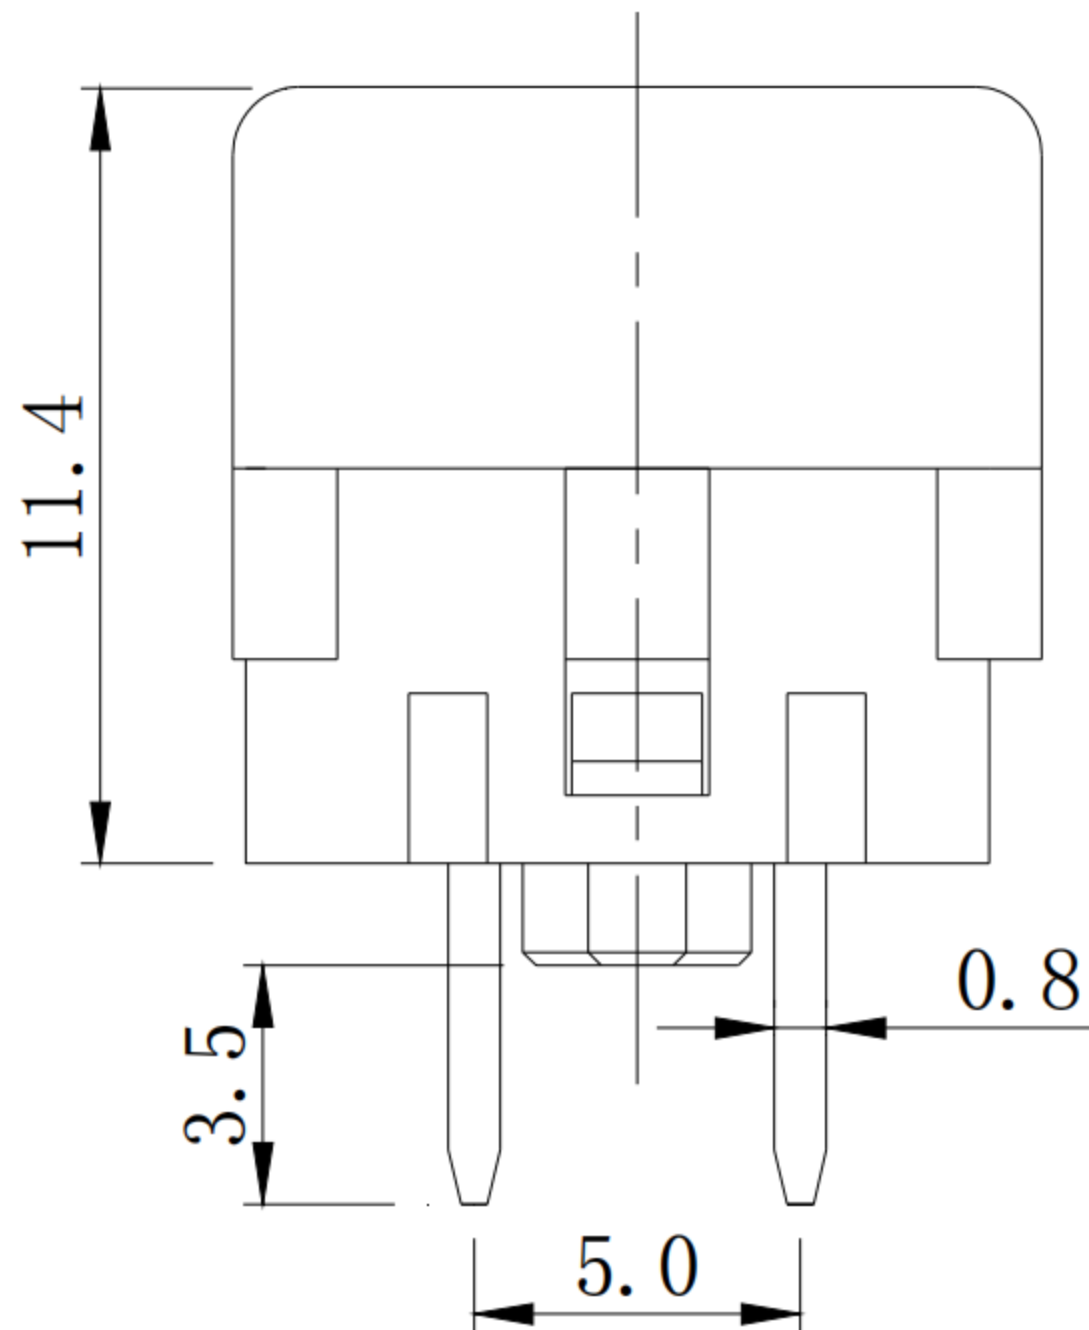

8	LED	GaAsP/GAP
7	CONTACT (big)	SUS
6	SPRING	SUS
5	CONTACT	C5210
4	TERMINAL	C2680 (H65)
3	BUTTON	PC
2	MAST	PA66
1	CASE	PA66
ITEM	PART NAME	MATERIAL

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: XB-TS-1203
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-1203			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					