
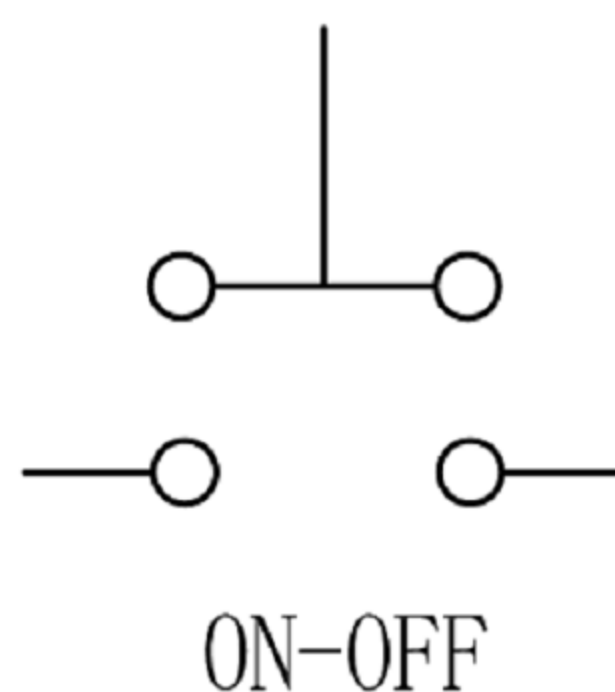
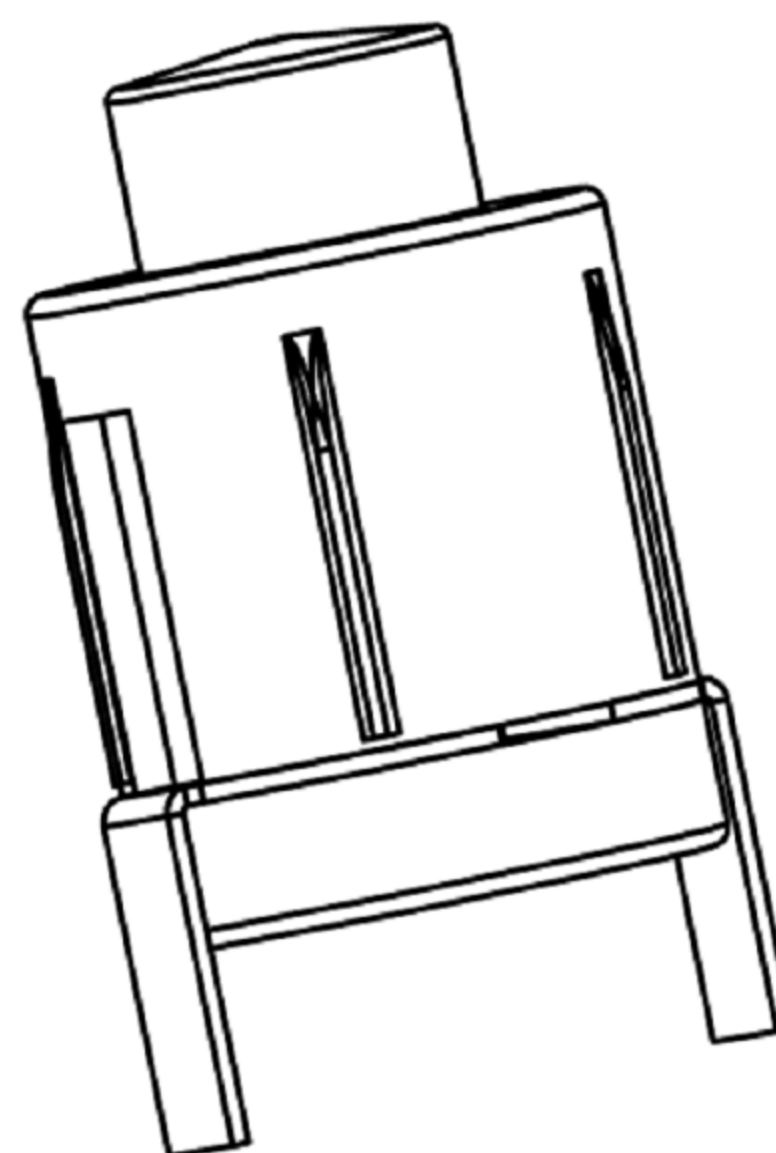


CAD FILE:

ROHS

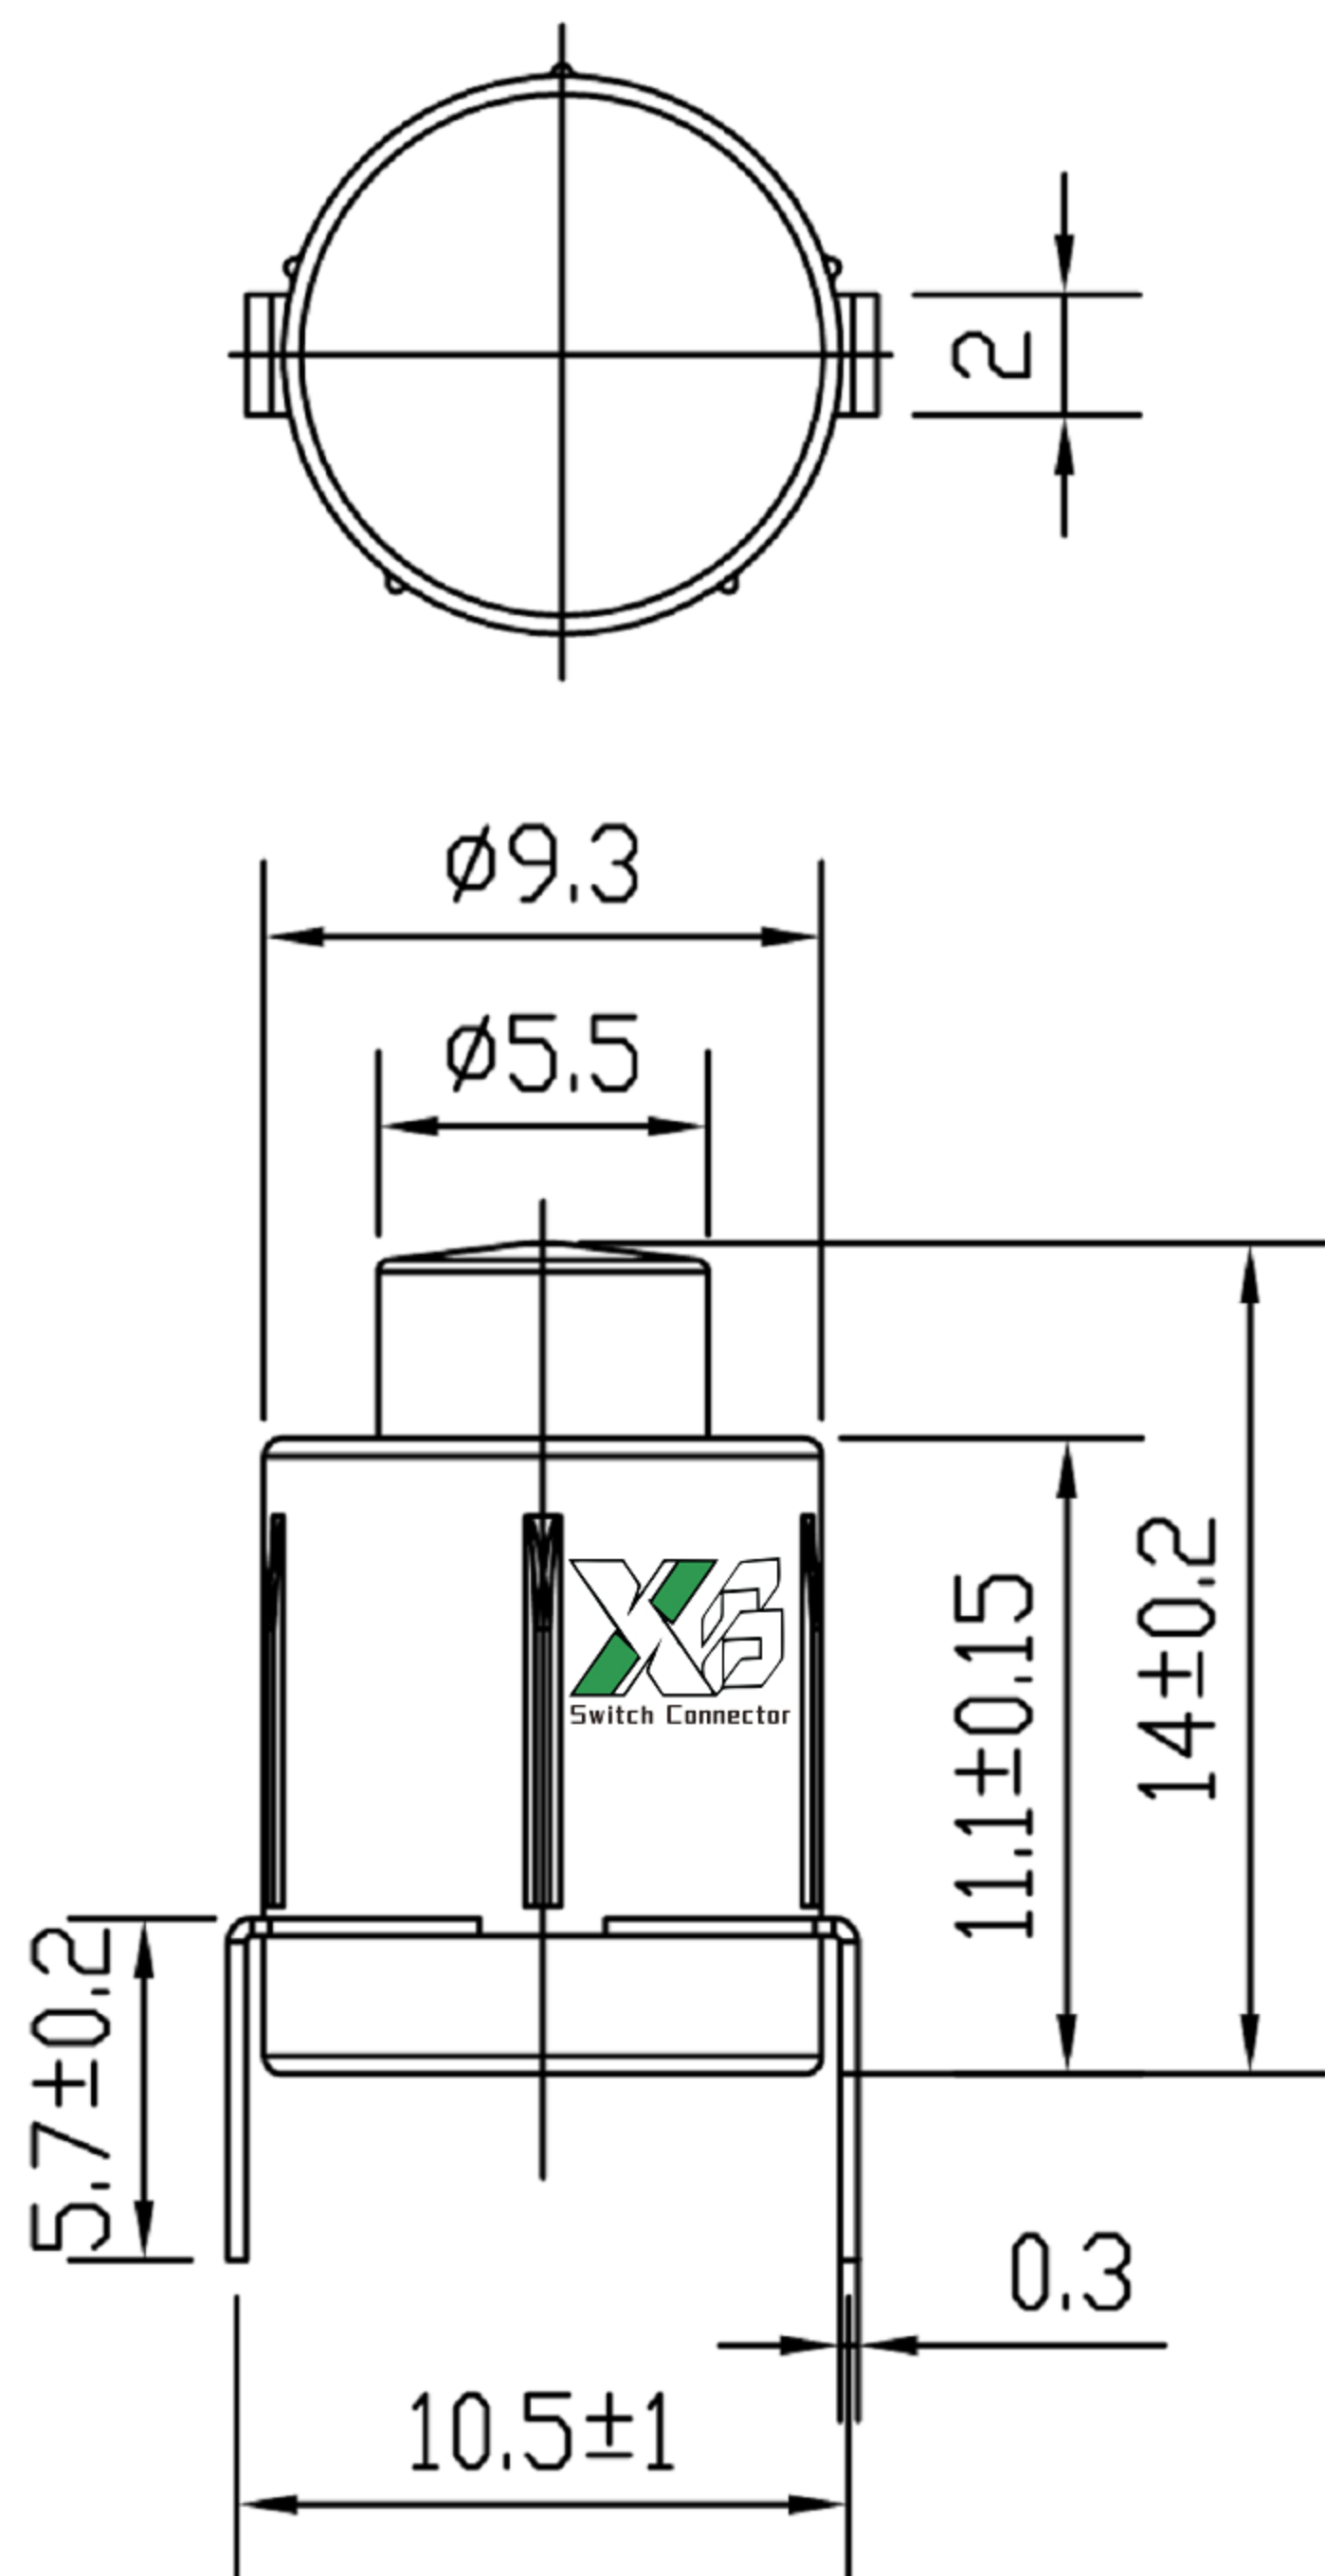

主要技术参数:

使用温度Temperature	-25°C~70°C
接触电阻Contact Resistance	≤100m Ω
绝缘电阻Insulation Resistance	DC500V 100M Ω
额定负荷Rated Load	DC30V 3A
耐压Withstand Voltage	AC500V(50Hz)/min
动作力Press and Return Force	500gf±200gf
机械寿命Life	30000次

8										
7										
6										
5										
4	CONTACT	SUS	1	Ag CLAD						
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED						
2	COVER	STEEL STRIP	1	Ni PLATED						
1	KNOB	PPA	1	BLACK						
NO.	PARTS	MATERIALS	Q'TY	FINISH						
					TOLERANCE UNLESS SPECIFIED					
					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版		ZENQ. CHEN
					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
					TITLE : Push Switch		UNIT : mm	DRWG NO.: XB-YT-101X		
					MODEL: XB-YT-101X		SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
					东莞市溪榜电子有限公司		CHK'D	DONG. PANG		2012-9-25
					DONG GUAN XI BANG ELECTRONICS CO., LTD.		APPD.	ZENQ. CHEN		2012-9-25



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.