
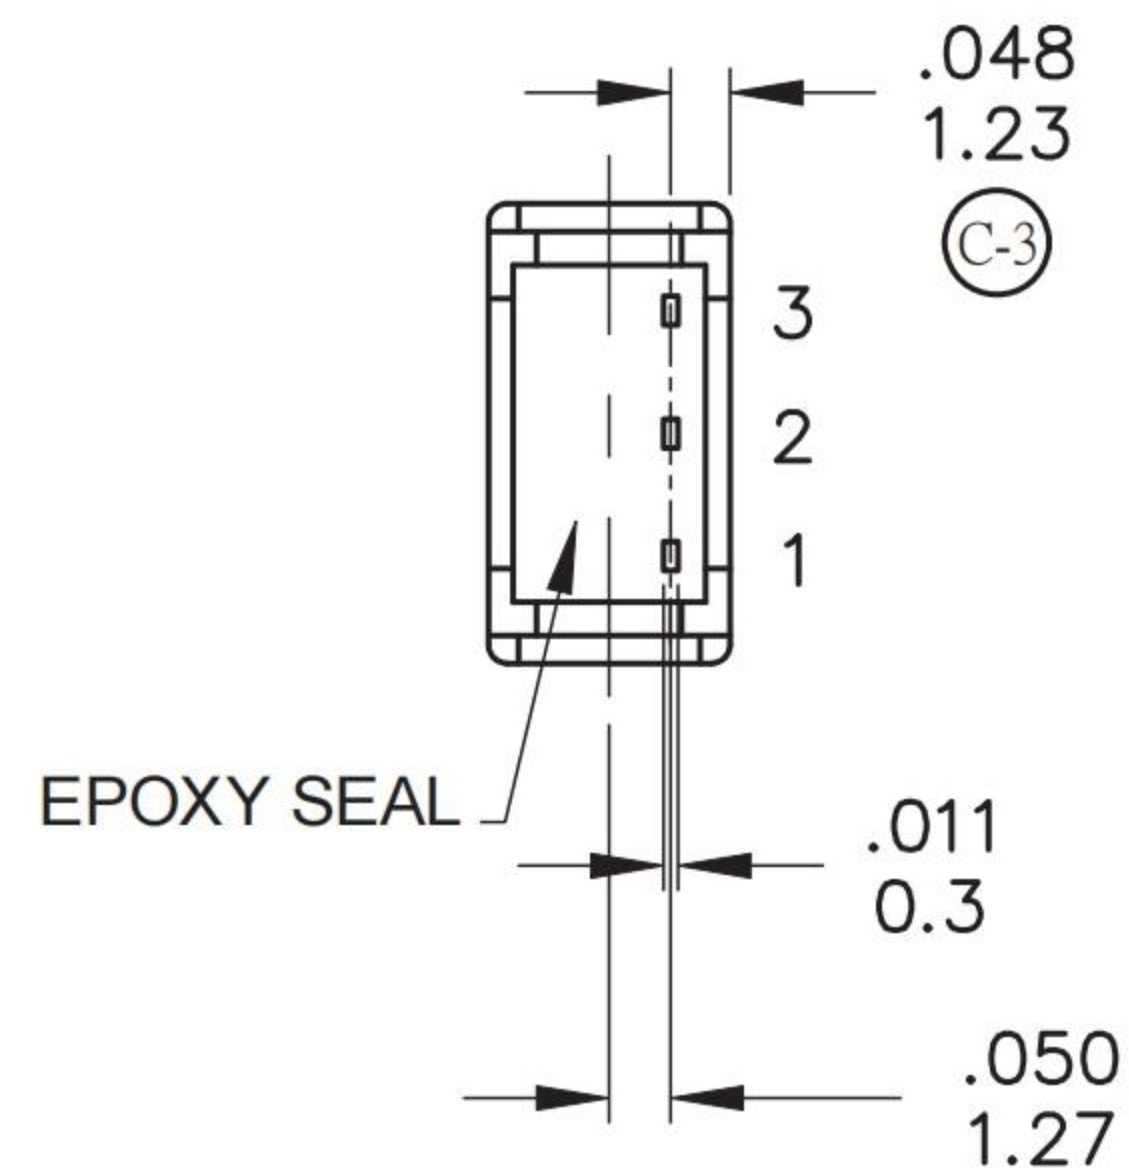
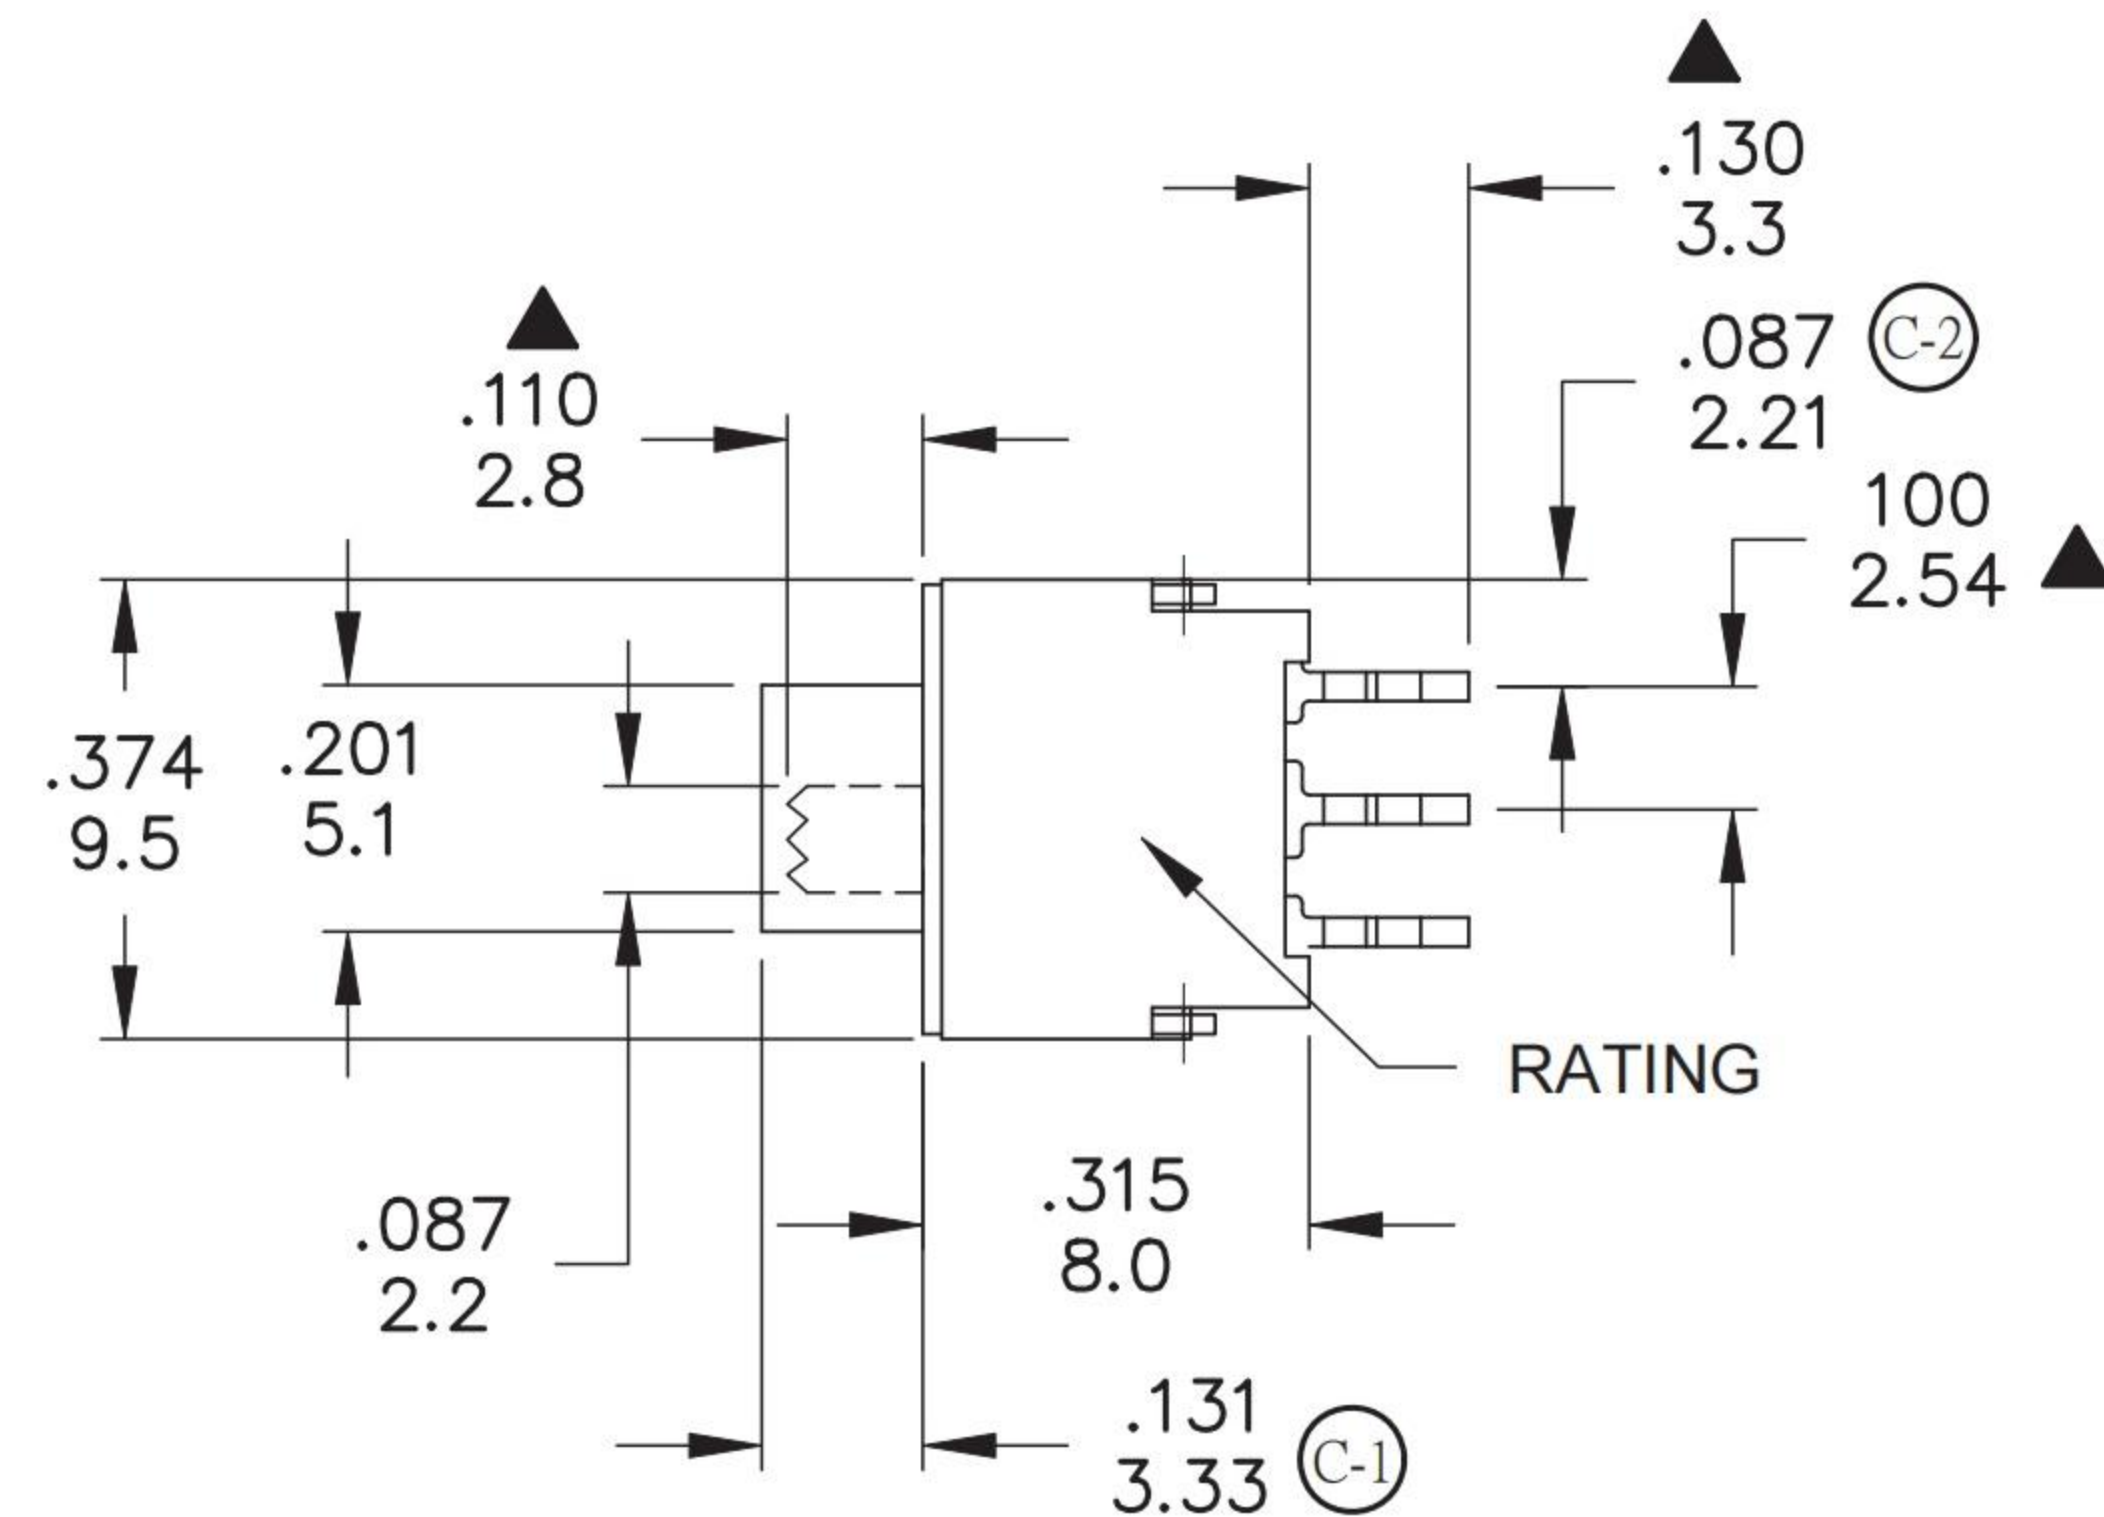
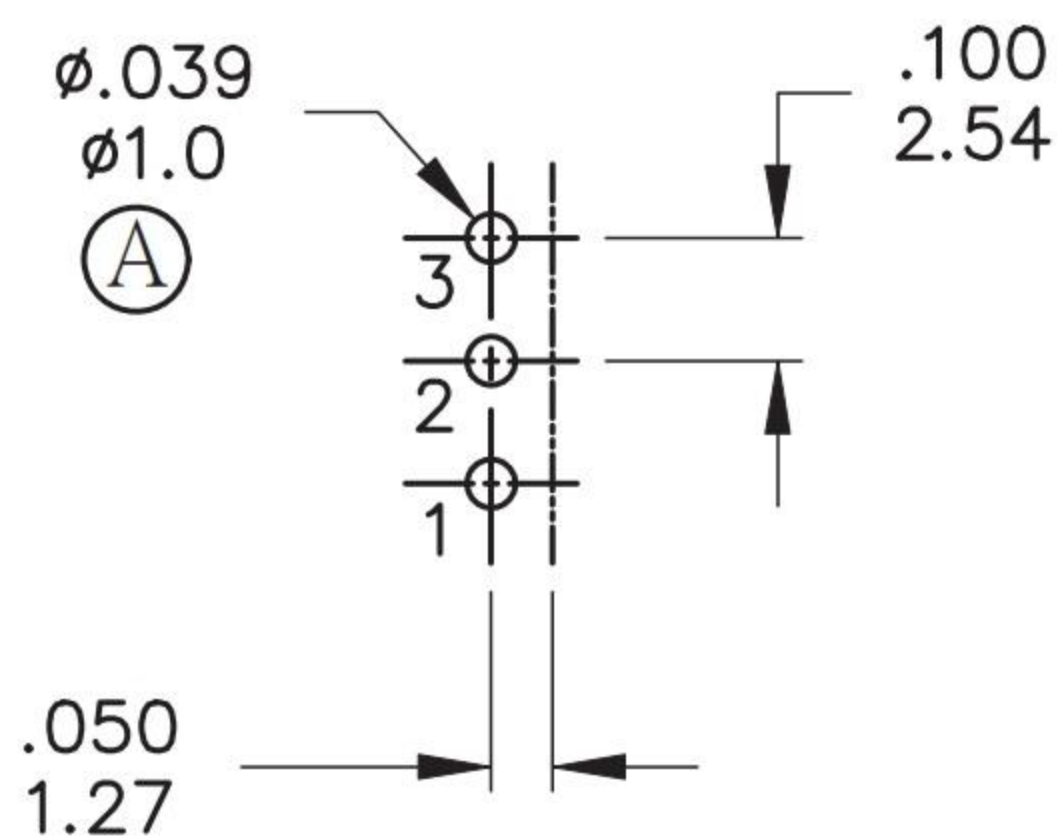


CAD FILE:

ROHS

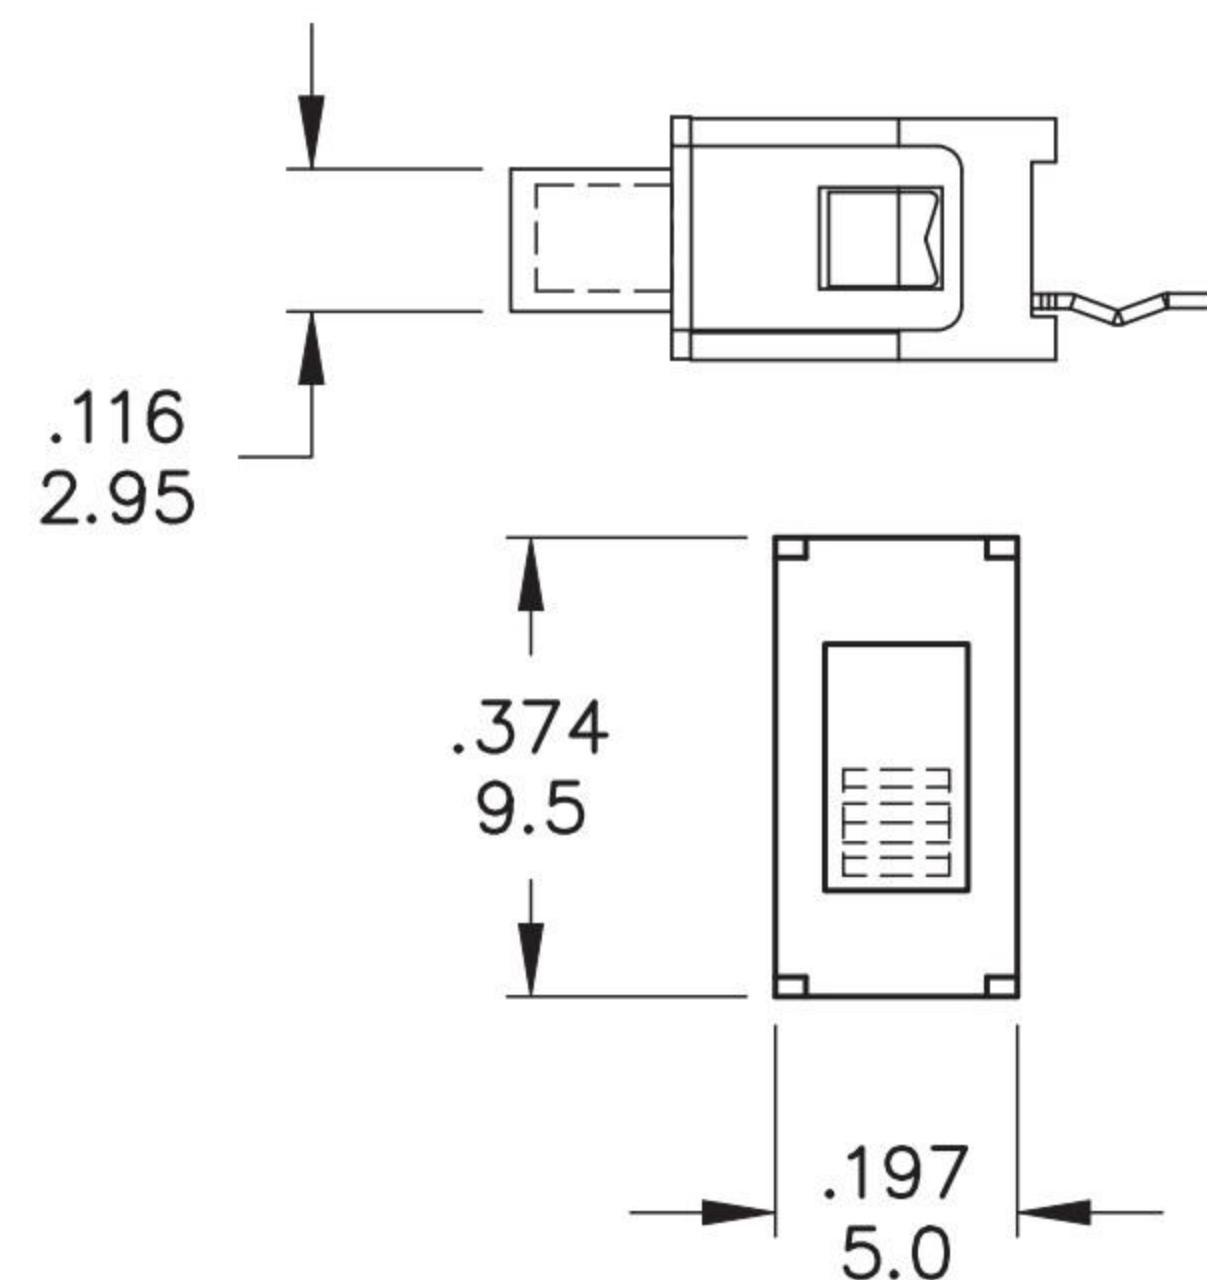

Model No.	POS.1	POS.2	POS.3
5SES1	ON	NONE	ON
Term. Comm.	2-1	N/A	2-3
SCHEMATIC			

SWITCH FUNCTIONP.C. MOUNTING

SPECIFICATIONS

CONTACT RATING: Max 0.4 VA max @ 48 VAC or DC**MECHANICAL LIFE:** minimum 40,000 operations.**CONTACT RESISTANCE:** 50mΩ max.**INSULATION RESISTANCE:** 500MΩ at 250 VDC. (A)**DIELECTRIC STRENGTH:** 500V, 50 Hz for the duration of 1 minute.**OPERATING TEMPERATURE:** -20°C to 80°C.**DEGREE OF PROTECTITON:** IP67

MATERIALS

ACTUATOR - PBT,yellow std.(B) **HOUSING** - Brass,Ni plated.(D) **CASE** - Glass filled nylon 6/6 , flame retardant , heat stadilized(UL94V-0)**CONTACT/TERMINALS** - Phosphor bronze gold - plated over nickel barrier.**TERMINAL SEAL** - Epoxy**RoHS & Lead Free**

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : SLide Switch			UNIT : mm	DRWG NO.: XB-SS-12D16N
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SS-12D16N			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					