

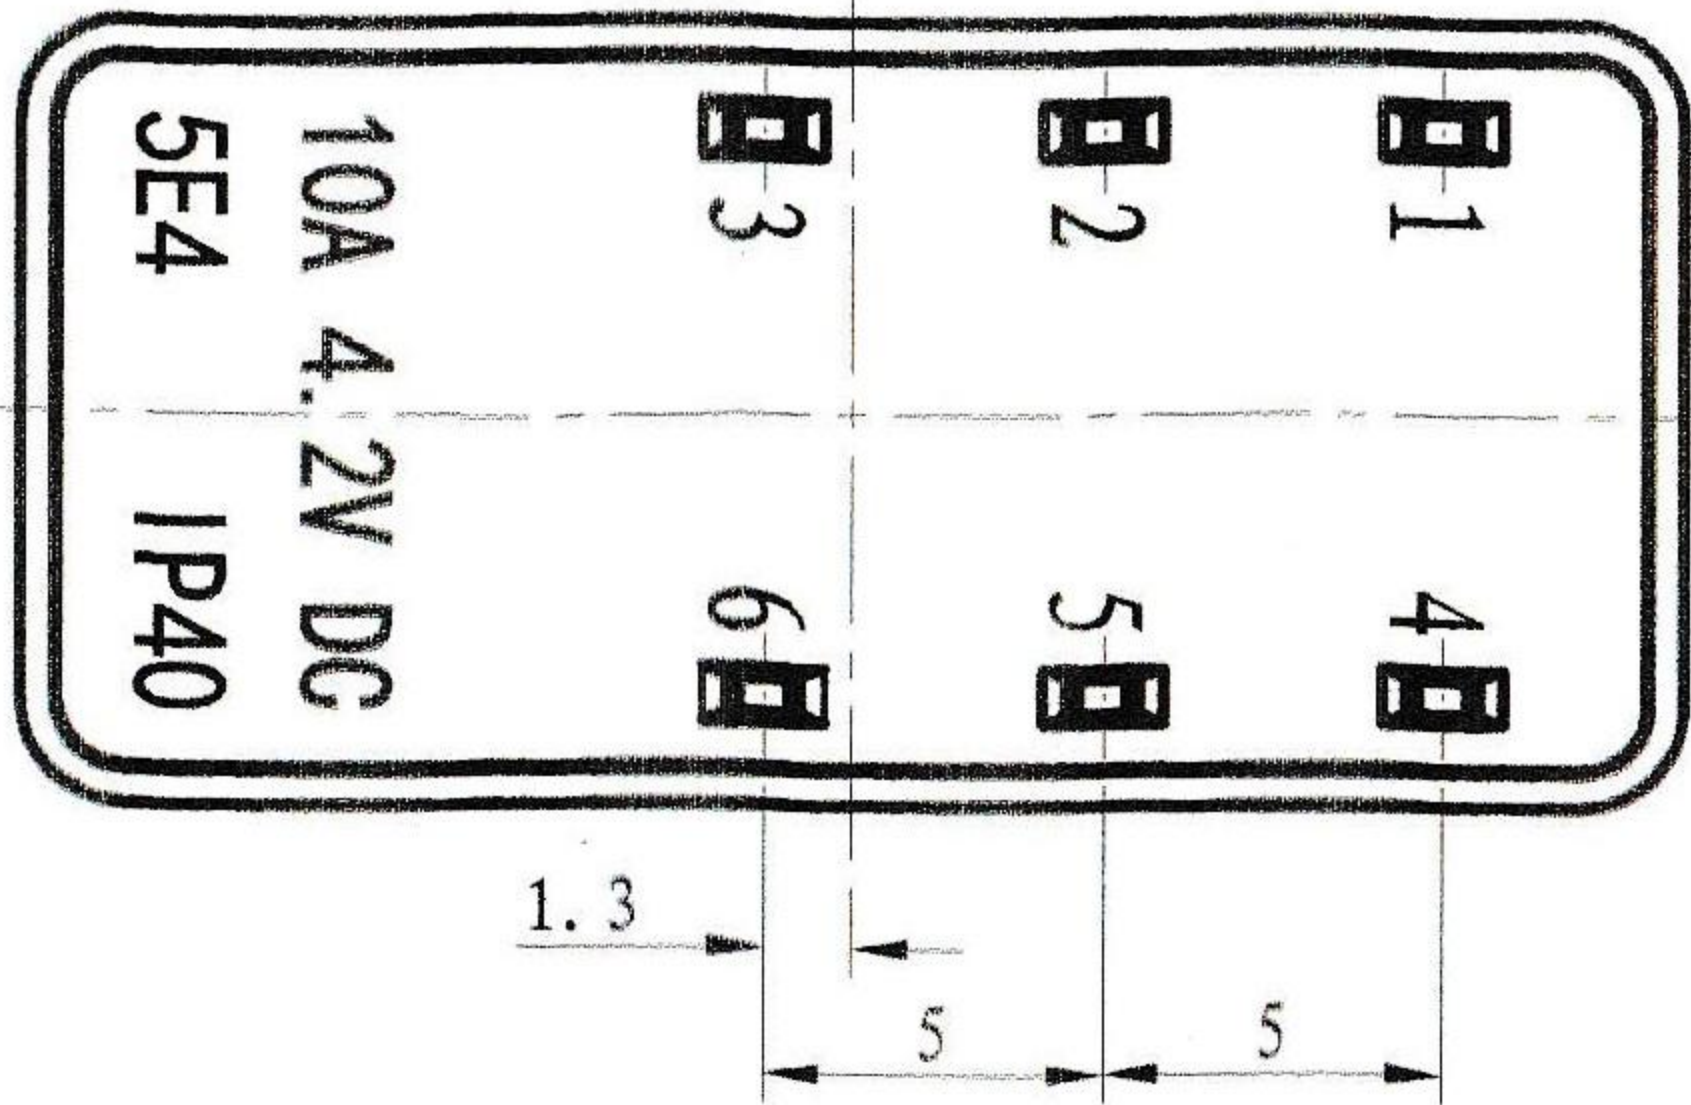
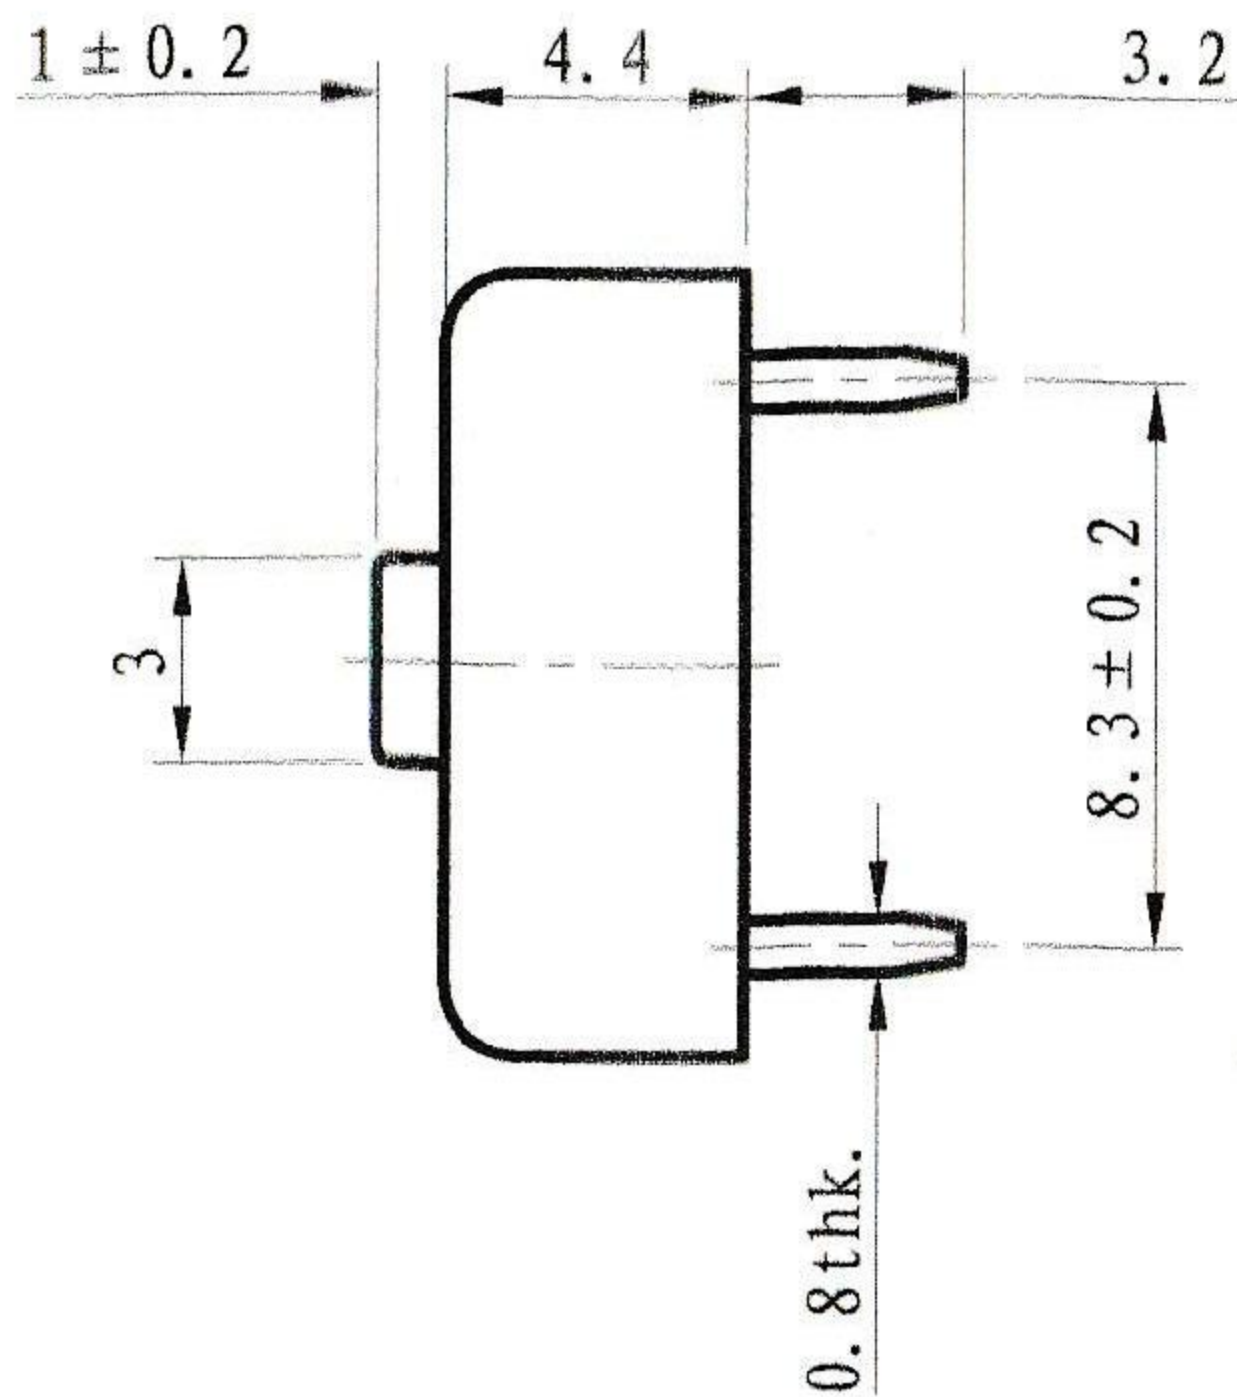
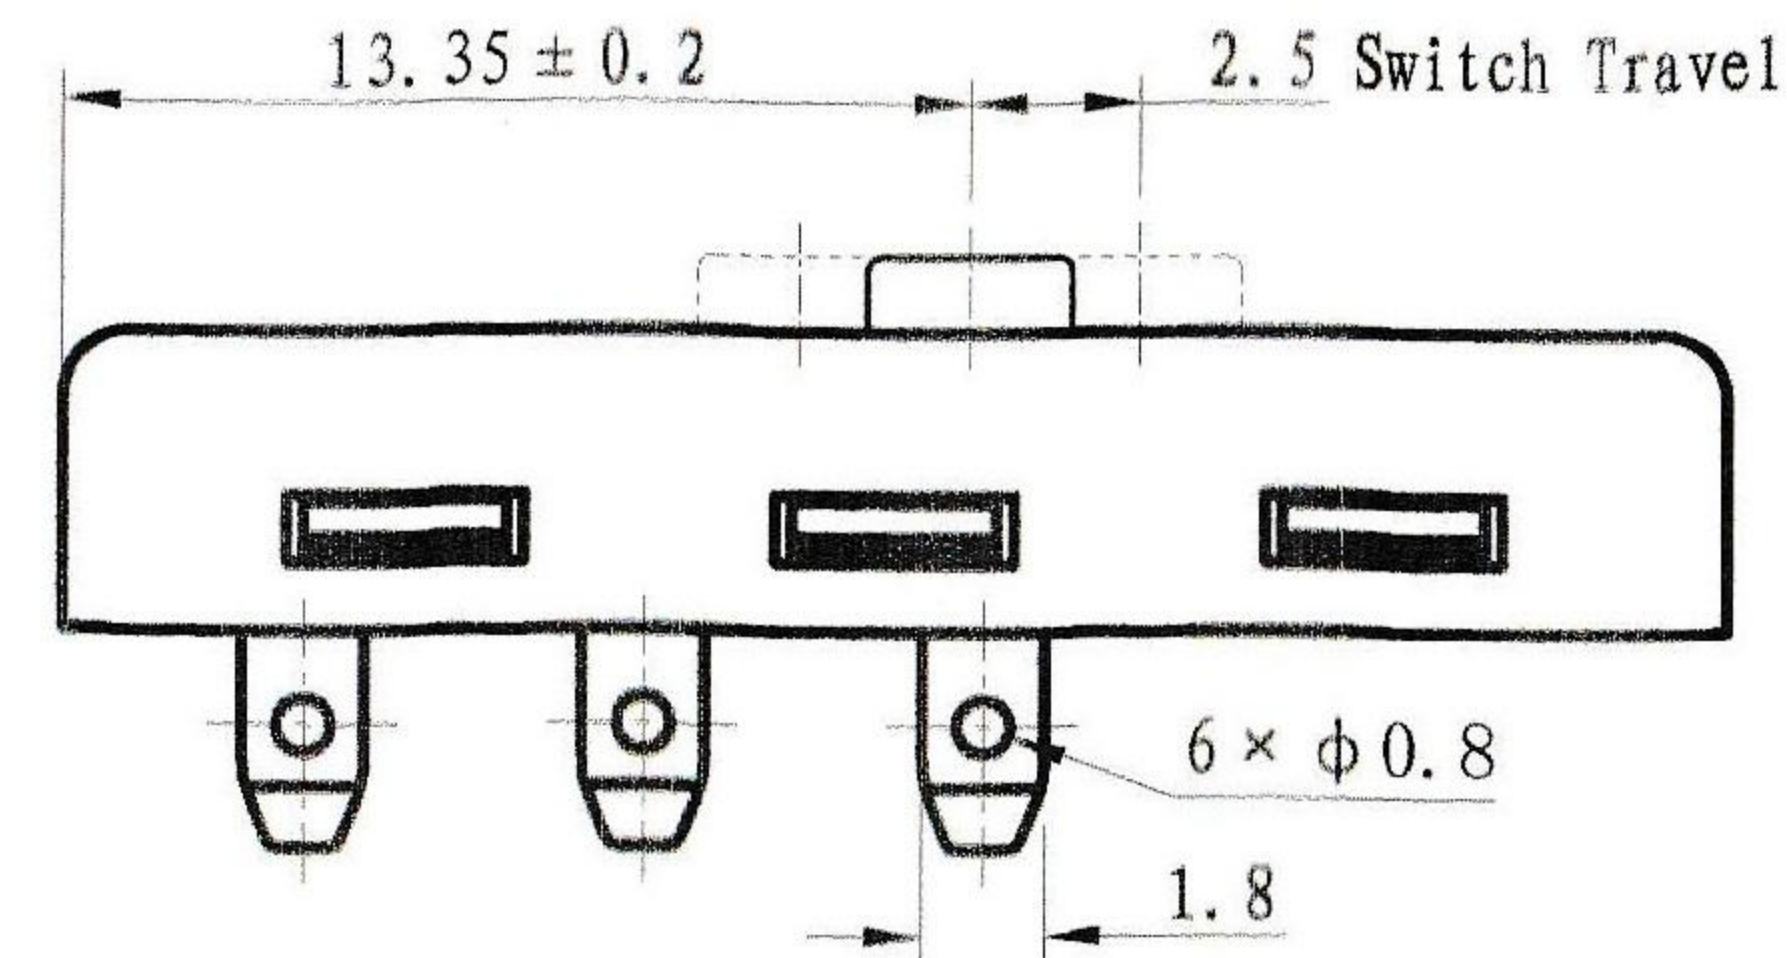


CAD FILE:

ROHS

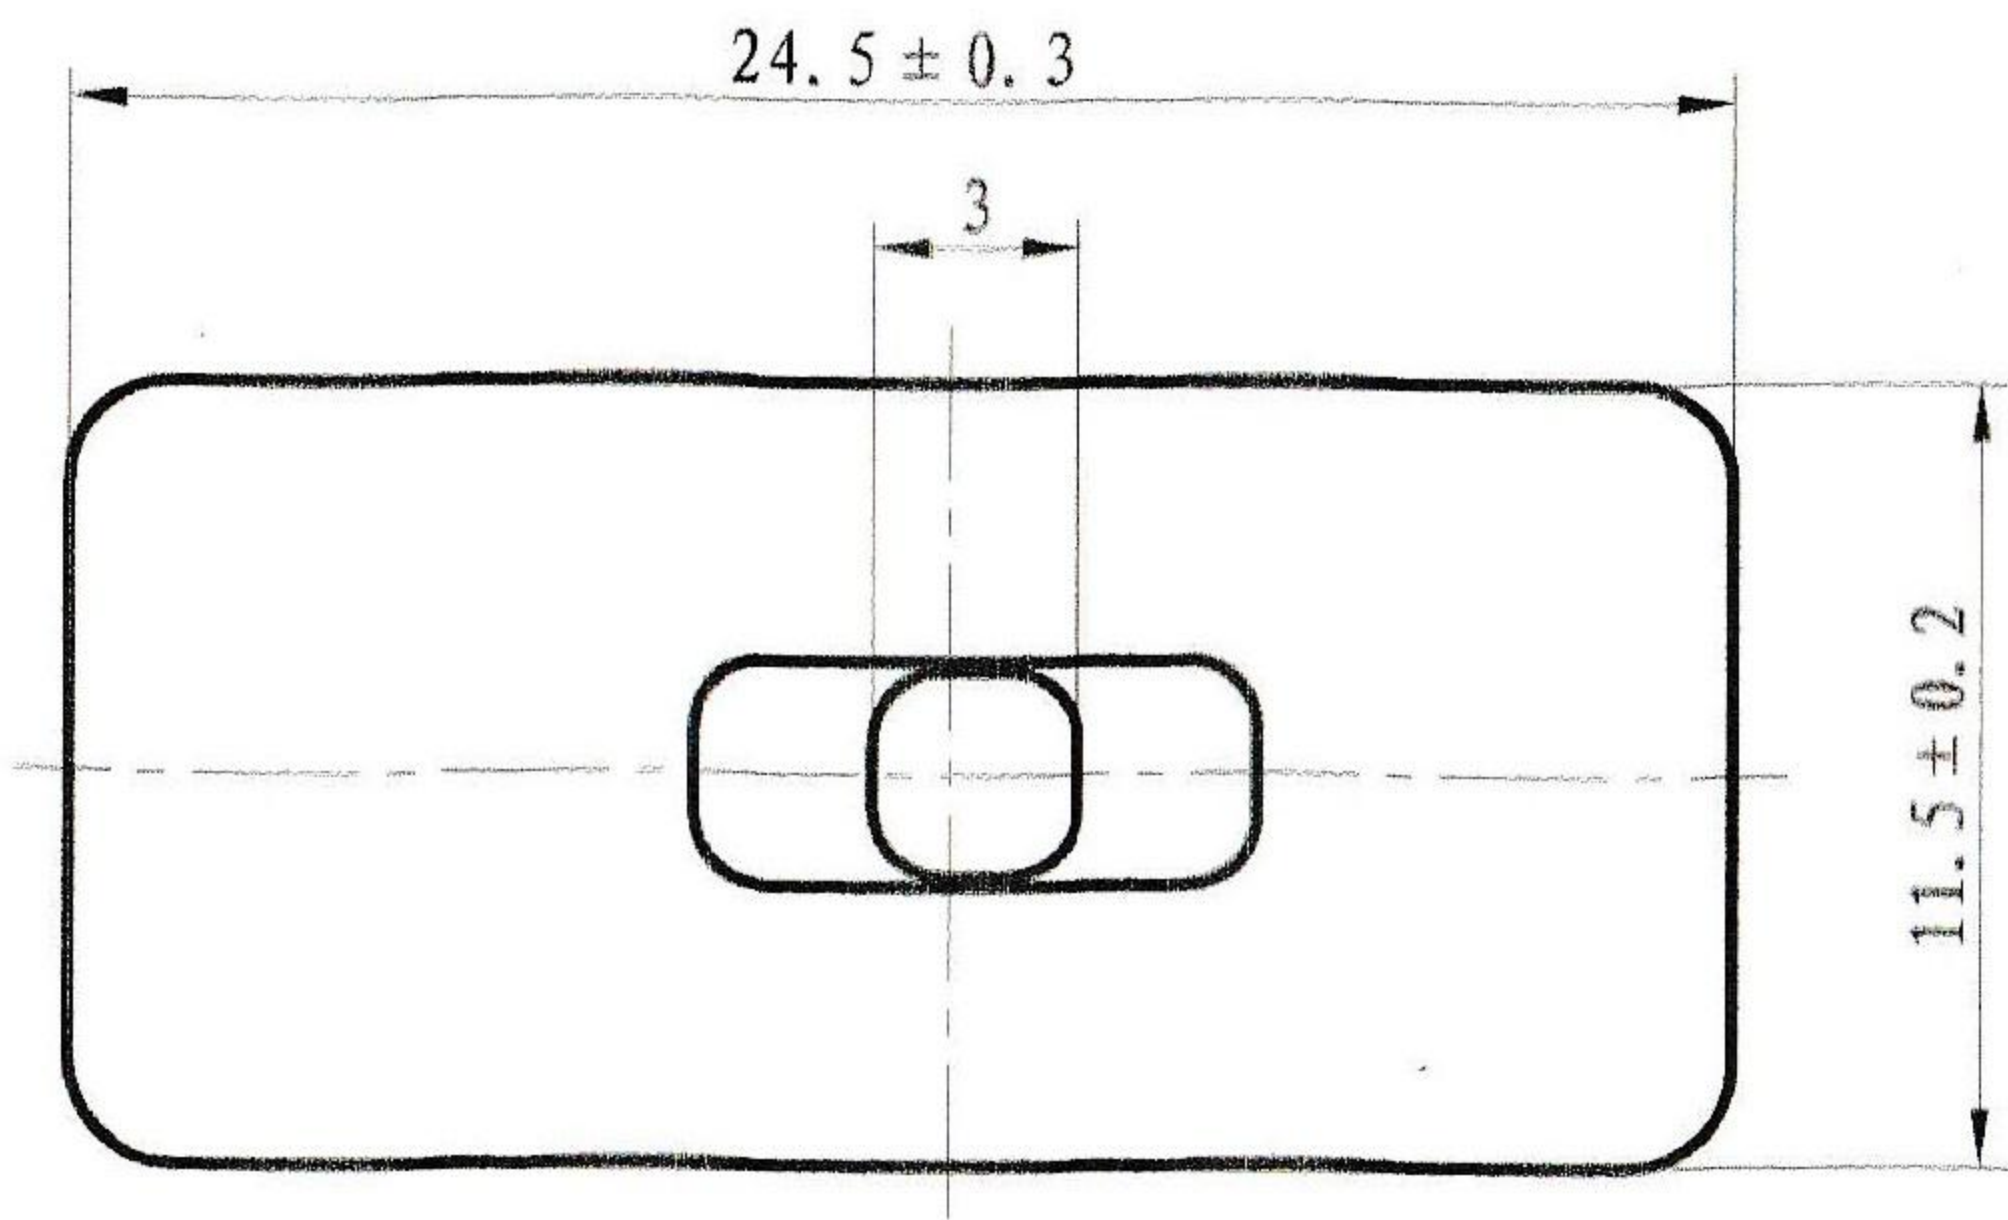

电气原理图/CIRCUIT:

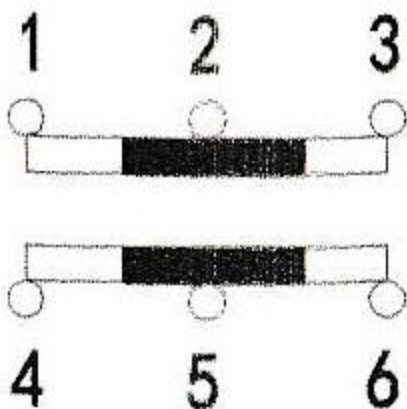

技术要求/Specifications:

- 1. 电 参 数/Rating : 10A 4.2VDC;
- 2. 接触电阻/Contact Resistance : $\leq 50\text{m}\Omega$;
- 3. 绝缘电阻/Insulation Resistance : $\geq 100\text{M}\Omega$;
- 4. 介电强度/Withstand Voltage :
 - 端子-端子/Terminal-Terminal : 1500VAC 10mA/5s;
 - 端子-手柄/Terminal-knob : 3000VAC 10mA/5s;
- 5. 操 作 力/Operating Force : 3~5N;
- 6. 电气寿命/Electrical life : 50000次;
- 7. 未标注公差按以下执行:
 $x. \pm 0.30 . x \pm 0.20 . xx \pm 0.10 \angle \pm 2^\circ$.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : SLide Switch			UNIT : mm	DRWG NO.: XB-SS-23E31
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SS-23E31			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					