

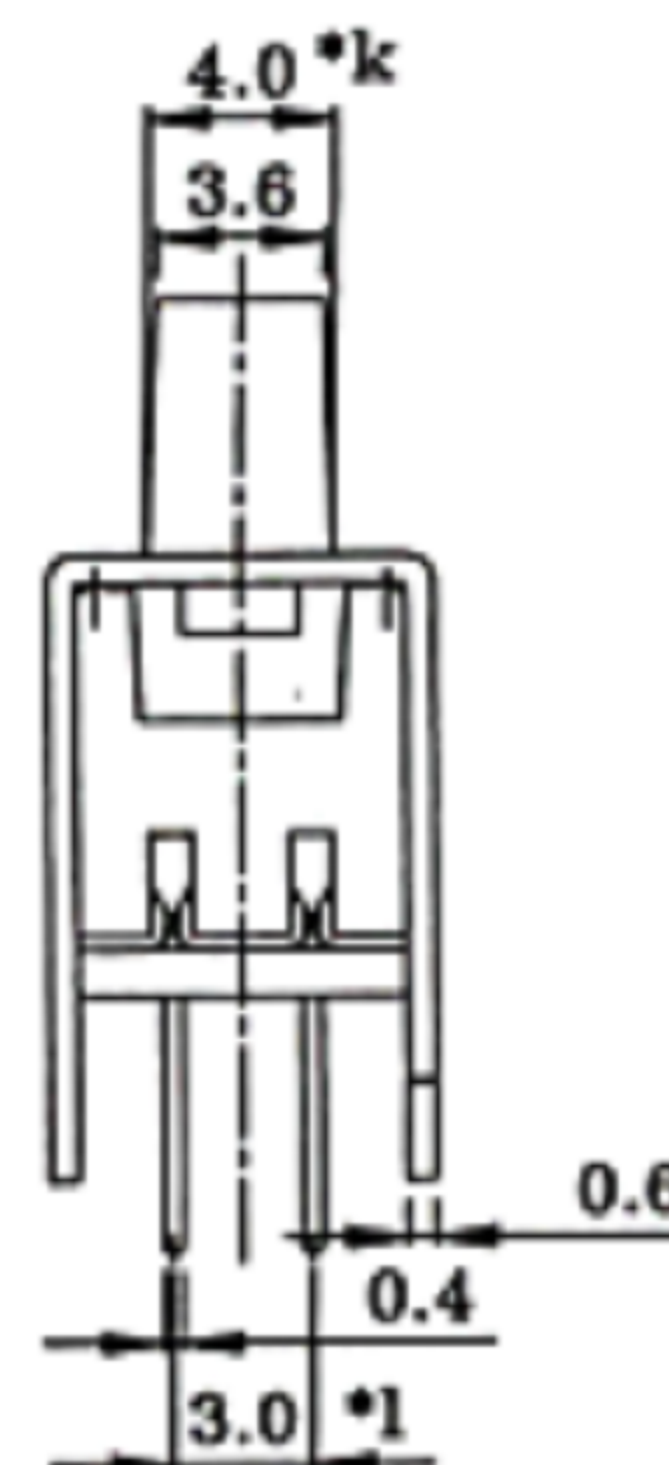


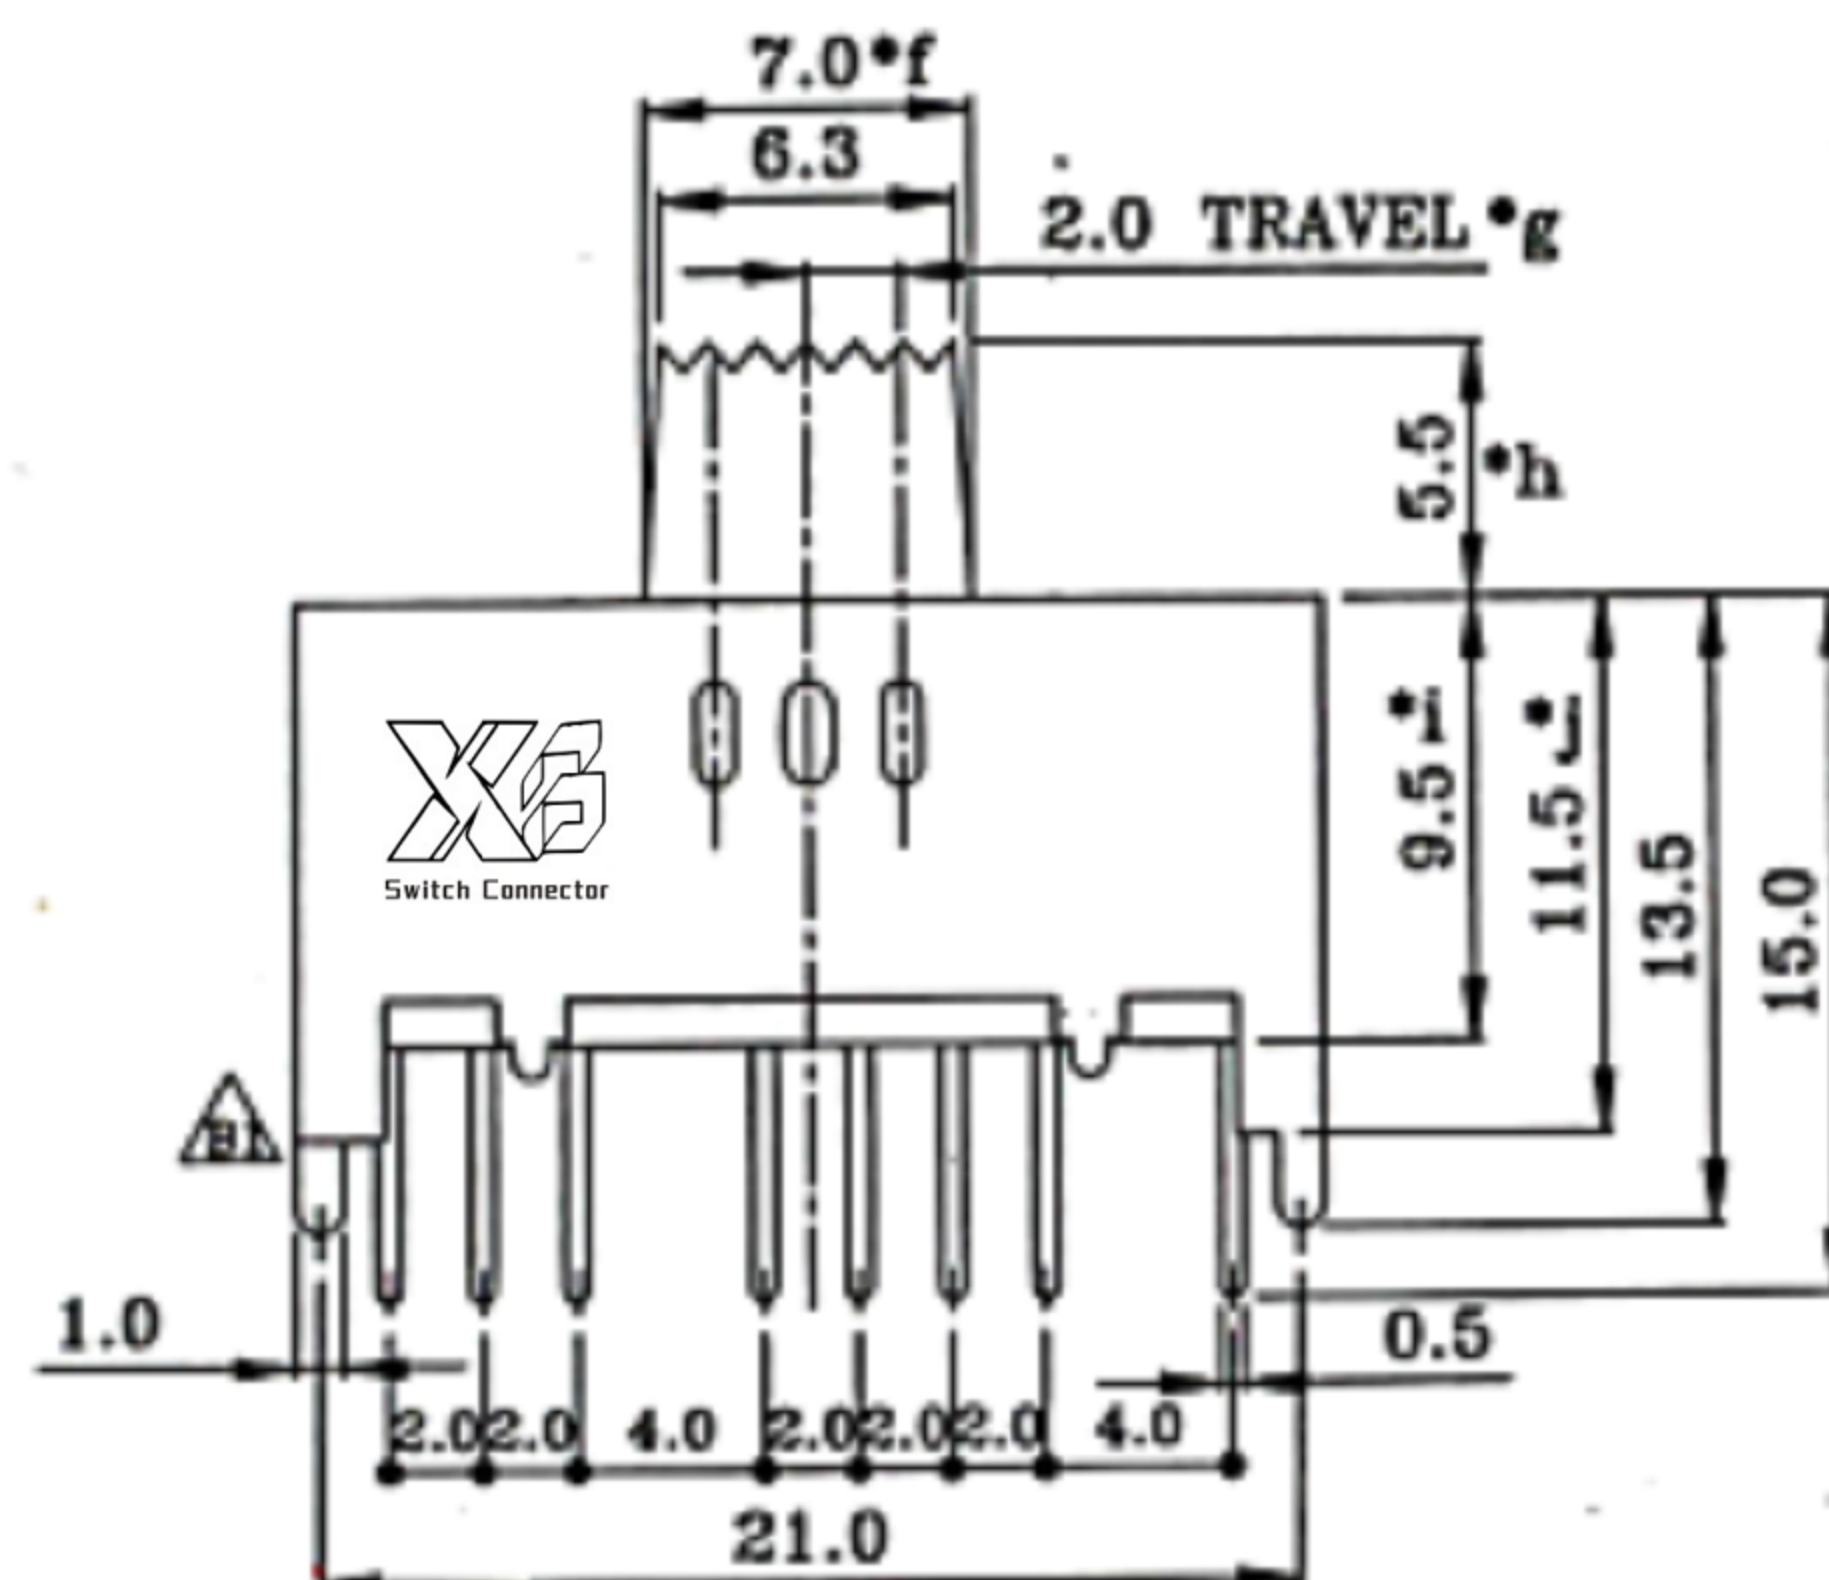

Technical drawing of a mechanical part, likely a bracket or plate, showing dimensions and a thread specification. The drawing includes the following dimensions and features:

- Overall width: 22.0 *a
- Inner width (excluding mounting holes): 17.0 *b
- Width of the central threaded section: 11.20 *c
- Thread specification: 4-40 UNC-2B (indicated by a leader line pointing to the left mounting hole)
- Overall height: 4.4
- Height of the central section: .83

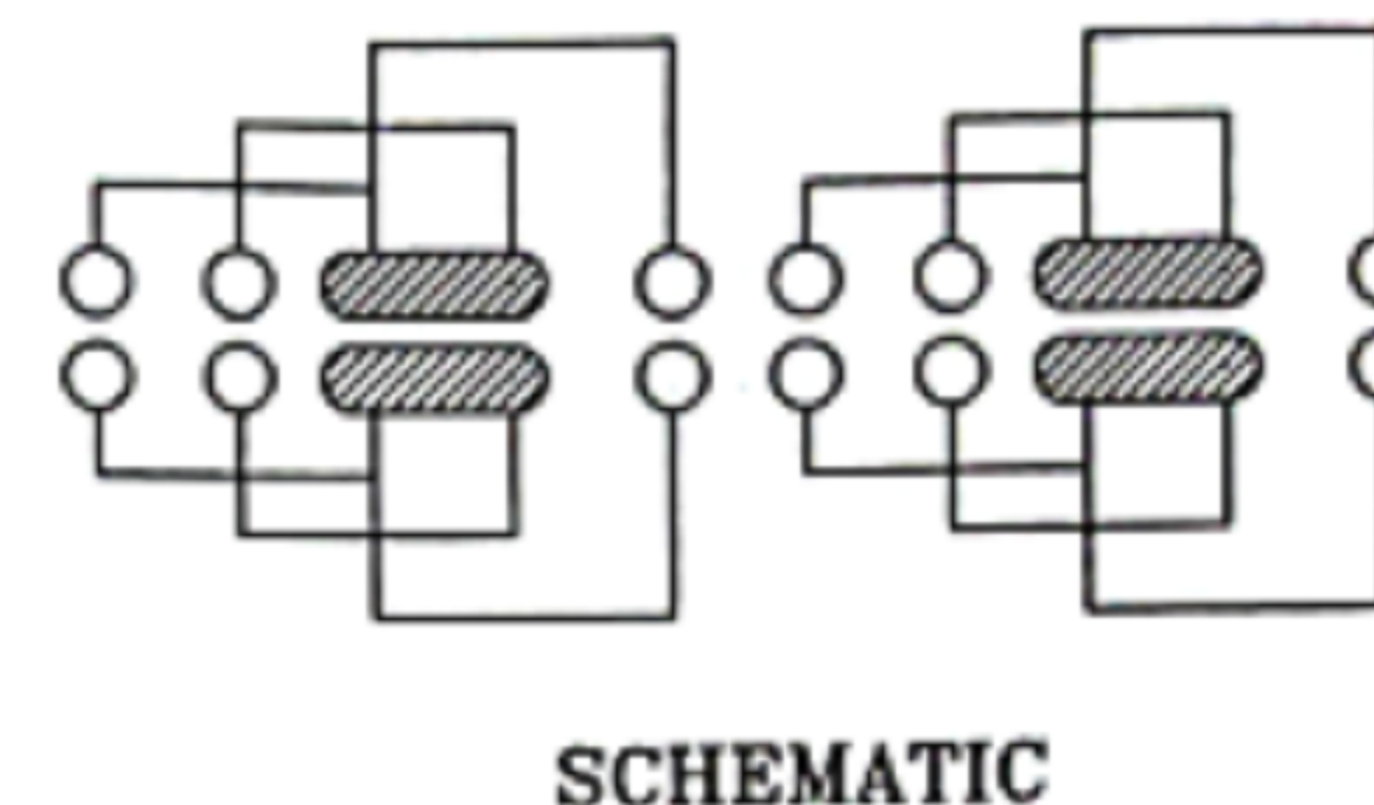

- 1.XB Slide Switch electrical parameters
2. Rating : DC 12V 30V 0.3A 0.5A
3. Circuit : 4P3T
- 4.Operating gear:3rd gear
5. Travel : 2.0mm
6. Operating Force : T1-2 : $250 \pm 100\text{gf}$
 T2-3 : $250 \pm 100\text{gf}$
- 7.Contact resistance: 30M Ω
- 8.Withstand voltage: 500V AC for 1 minute
- 9.Handle length: 2.0-10mm
10. Terminal : P.C. Board Terminal

1. The dimensions marked with * are mandatory for CTQ inspection.
2. The material must meet environmental requirements.
3. Note that the rubber head is parked on the right side.

8					TOLERANCE						
7					UNLESS SPECIFIED						
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : SLide Switch			UNIT : mm	DRWG NO.: XB-SS-43D04		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-SS-43D04			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							