
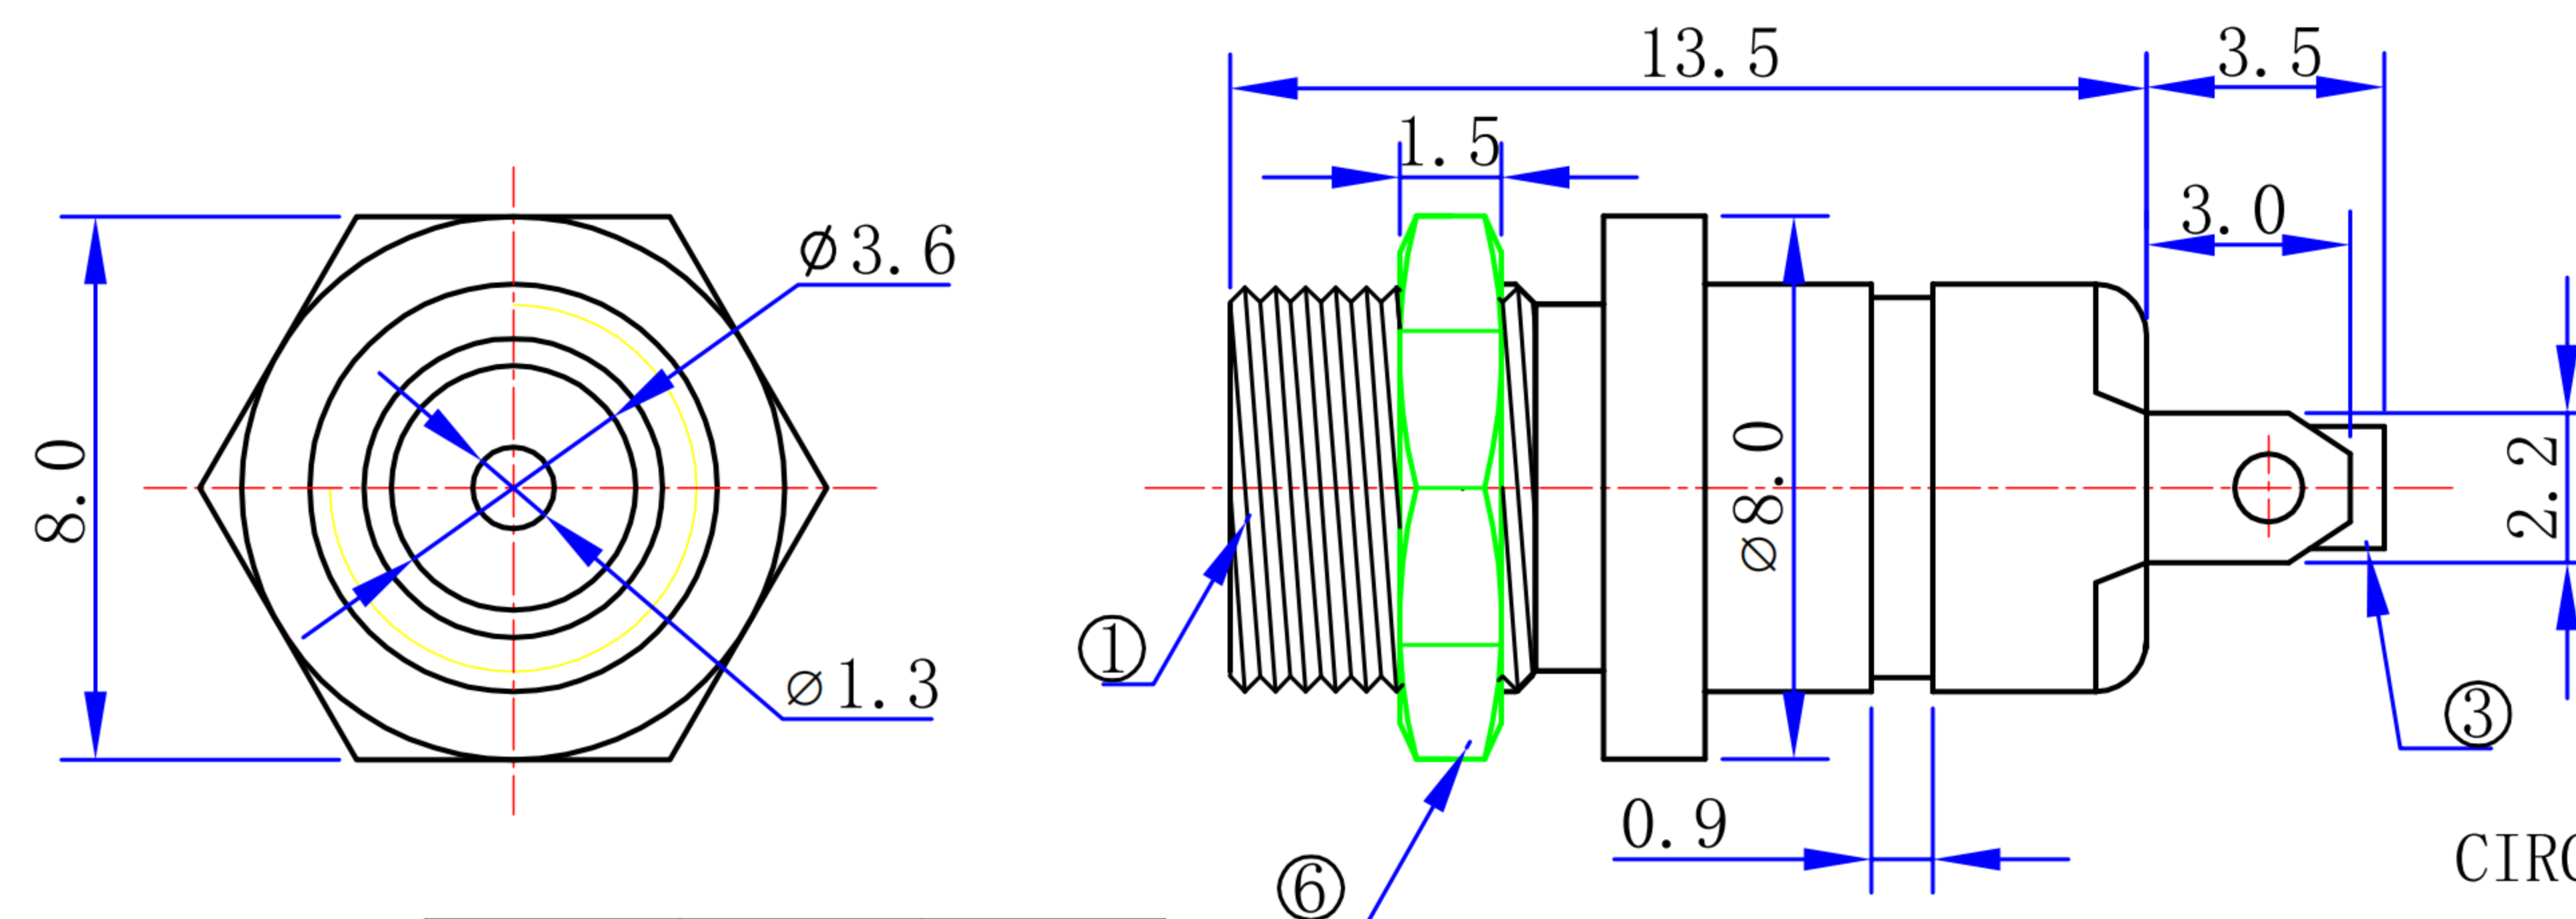



CAD FILE:

ROHS


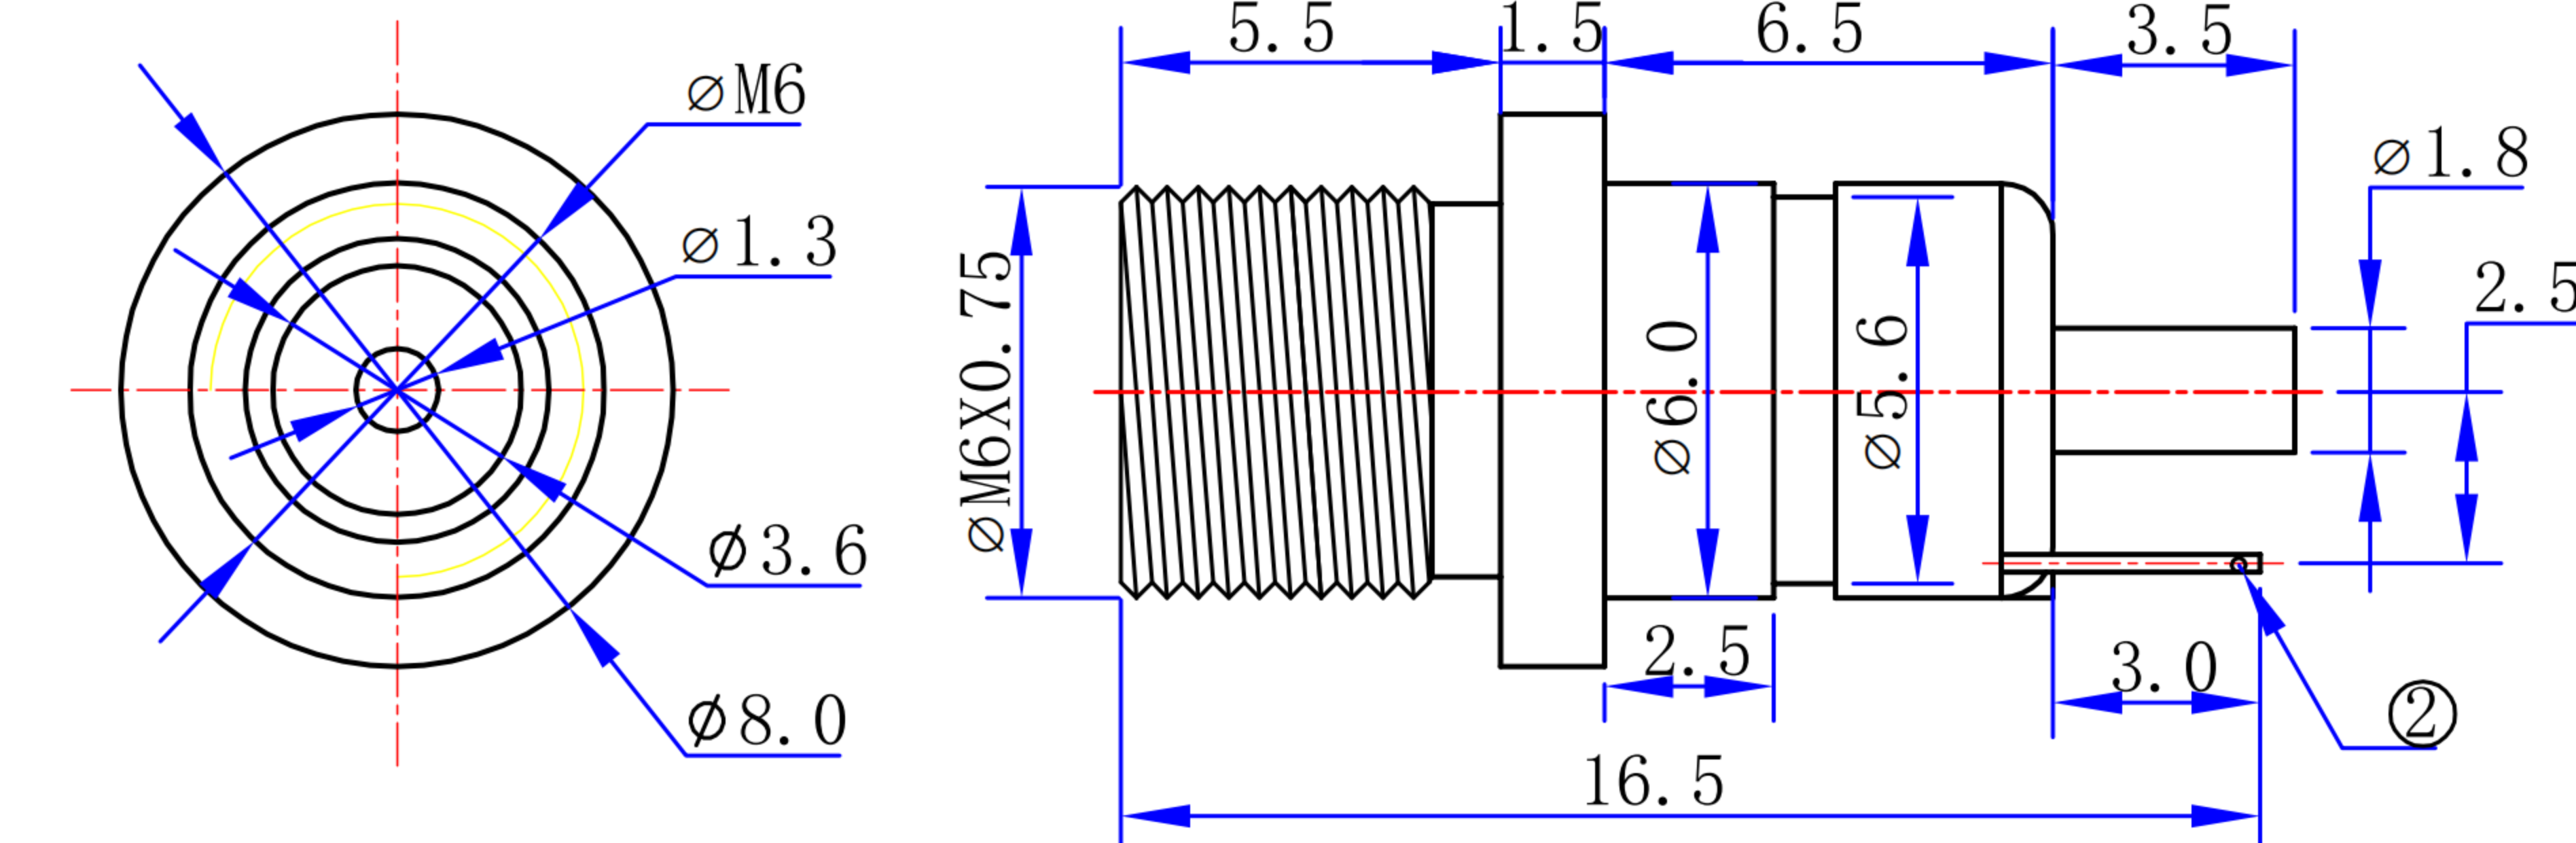


PIN	Ø1.3	Ø1.65
APPD.		

- 技术要求
- 1、插入力: 2.94~29.4N(0.3~3.0kgf)
 - 2、拔出力: 2.94~29.4N(0.3~3.0kgf)
 - 3、接触电阻: $\leq 50\text{m}\Omega$
 - 4、绝缘电阻: $>100\text{M}\Omega$ DC 500V
 - 5、耐电压: AC 500V 1min无飞弧及击穿
 - 6、寿命: 5000 10~20次/min
 - 7、额定负载: DC 30V 5A
 - 8、适用温度范围: $-25\sim 85^{\circ}\text{C}$
 - 9、推荐使用插头:

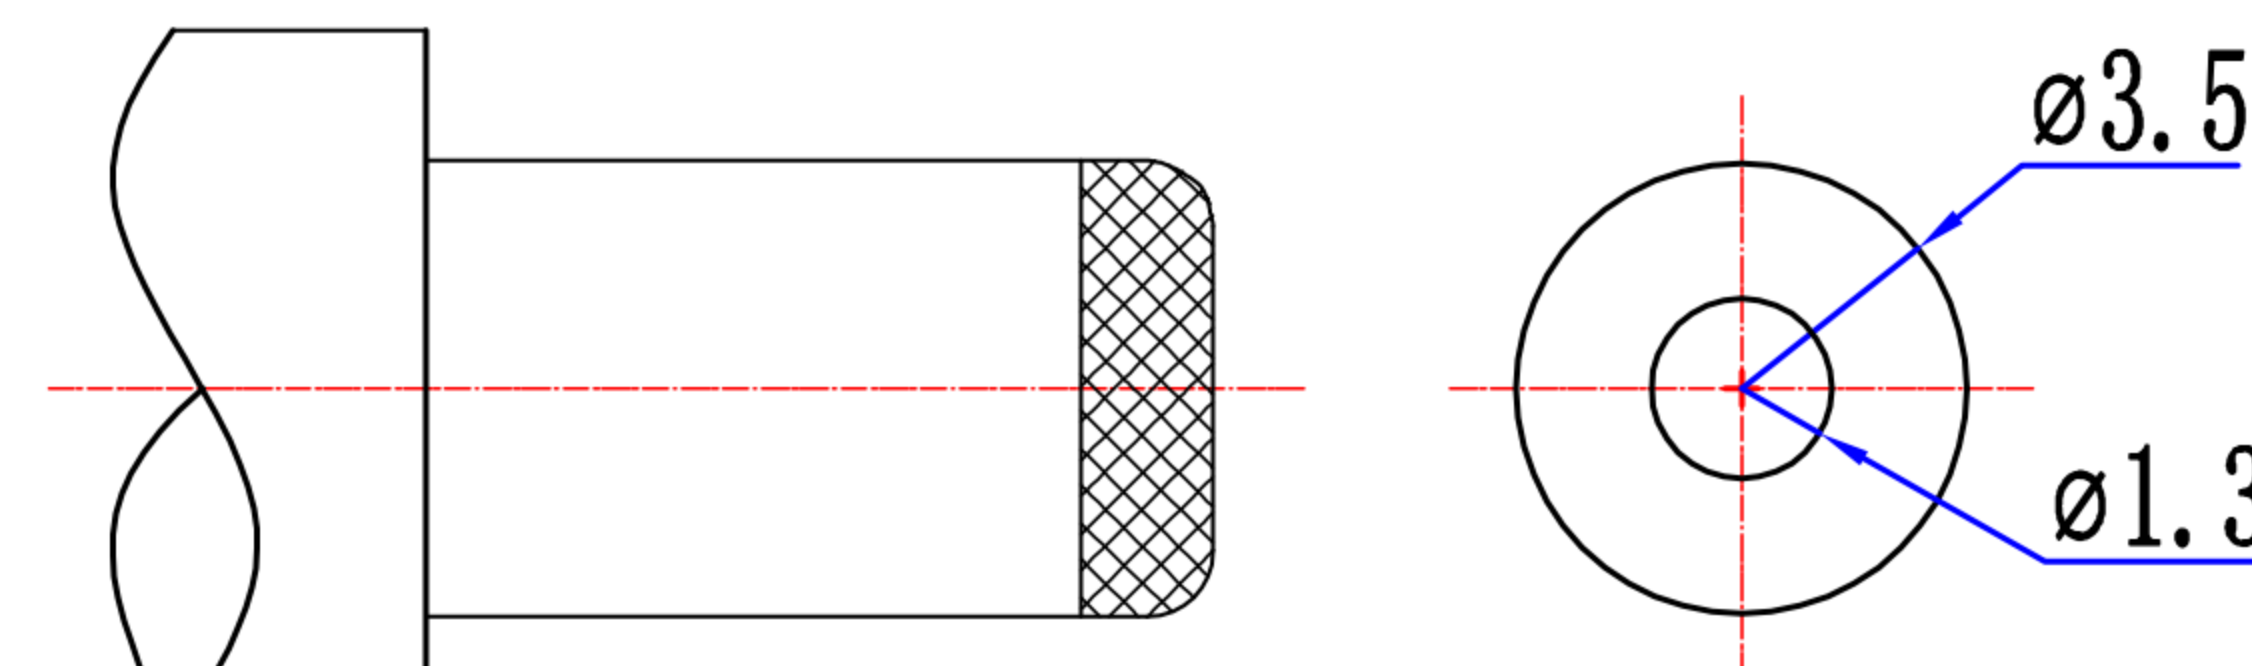DC MATE PLUG

CIRCUIT DIAGRAM

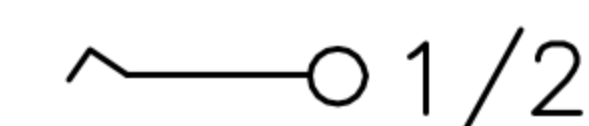

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: DC-083C
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					