

CAD FILE:

ROHS






- 1.滑动开关型号 SLIDE SWITCH MODEL:KND-2-3BP012-R2
- 2.焊线端子 SOLDER CONNECTOR TYPE;
单刀四掷, 多回路 SINGLE POLE FOUR THROW , MULTI-CIRCUIT
- 3.额定值 RATING: 16(4)A 125/250VAC μ T105 (UL,KC)
10(2)A 250VAC μ T85 (UL,KC,ENEC17;NEMKO)
10A 250VAC μ T85 (CQC,CE)
7(2)A 250VAC μ T85 (UL,ENEC17;NEMKO)
5(1)A 250VAC μ T85 (UL,ENEC17;NEMKO)
- 4.接触电阻 CONTACT RESISTANCE: <50m Ω (INITIAL)
- 5.绝缘电阻 INSULATION RESISTANCE: $\geq$ 100M Ω (DC500V/1MIN)
- 6.介电强度 DIELECTRIC STRENGTH: 1500V /0.5mA /1MIN
- 7.机械寿命 MECHANICAL LIFE: >50000 CYCLES
- 8.电气寿命 ELECTRICAL LIFE: >10000 CYCLES
- 9.端子手工焊接条件 SOLDER ABILITY OF TERMINAL: MAX350°C, 3S
- 10.操作力 OPERATION FORCE:550 $\pm$ 200gf
- 11.所有部件均使用环保材料 ALL MATERIALS ARE RoHS COMPLIANT

电流电路
CURRENT CIRCUIT

CIRCUIT:012

位置POSITION	电路CIRCUIT
1(INITIAL)起始	OFF
2	C2+3
3	C1+1,C2+3
4	C1+1+2,C2+3

线路图
CIRCUIT DIAGRAM

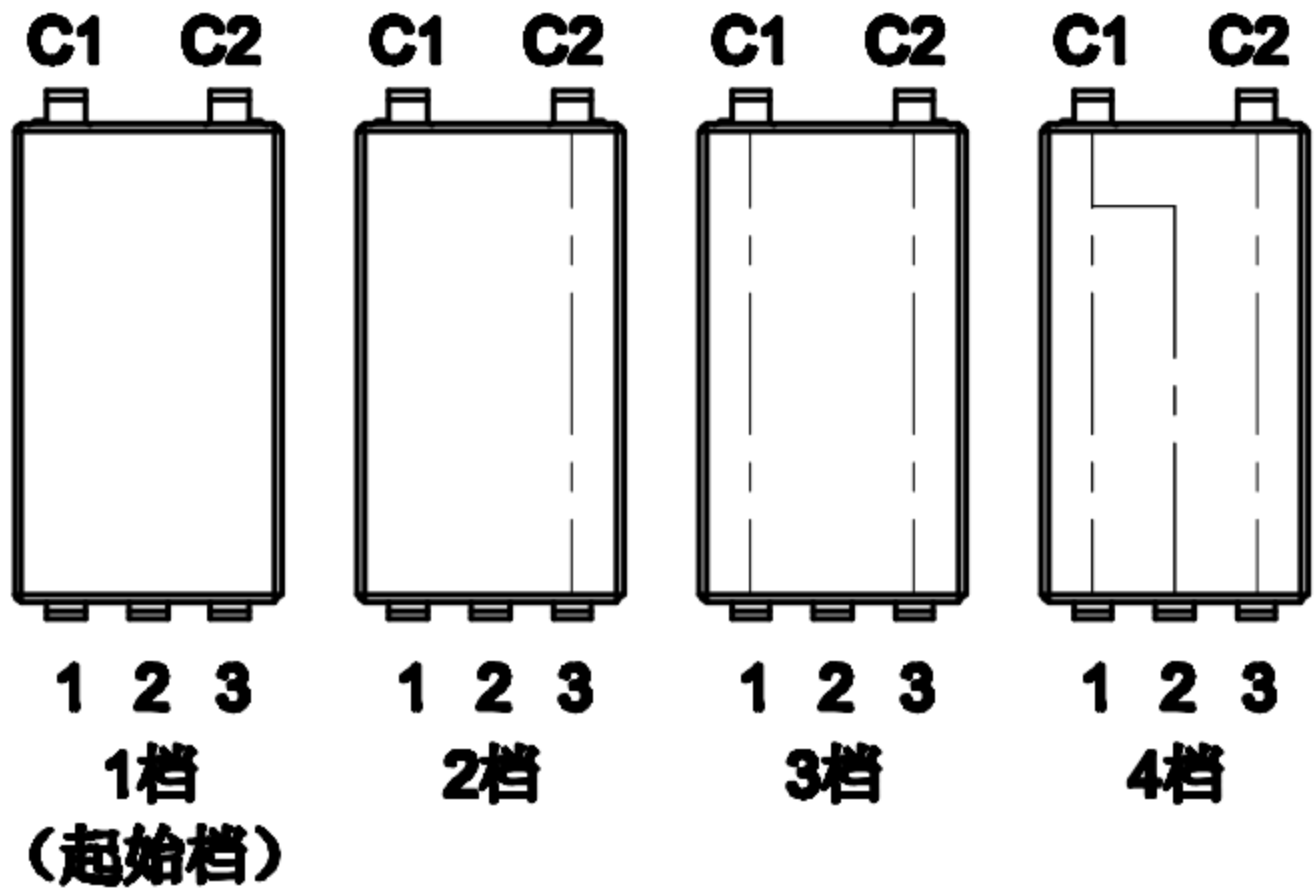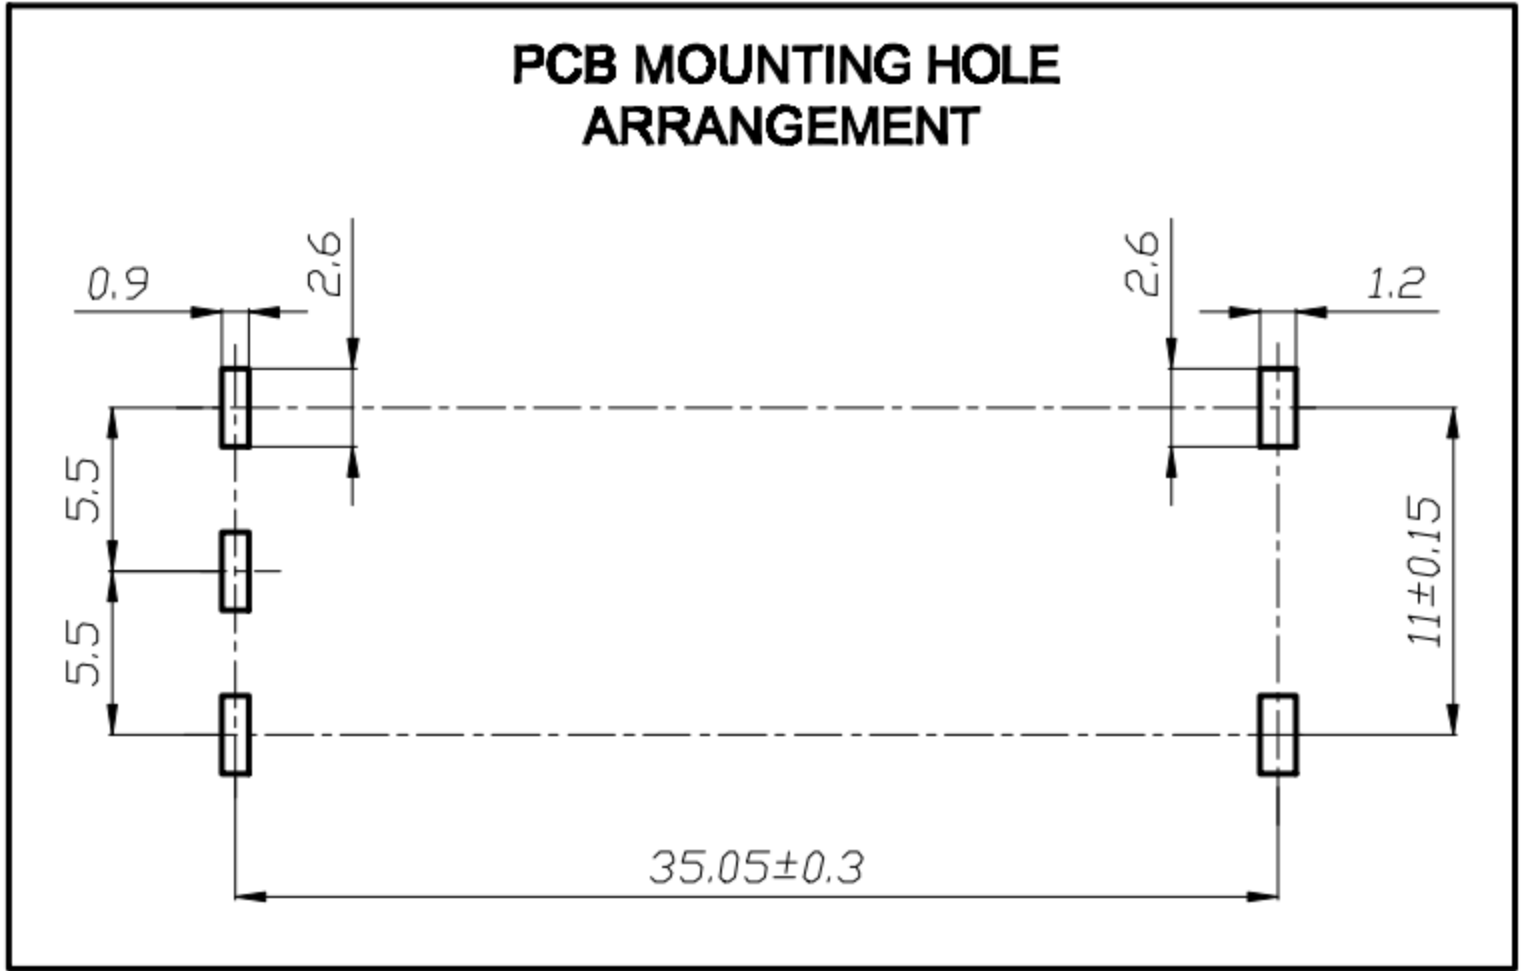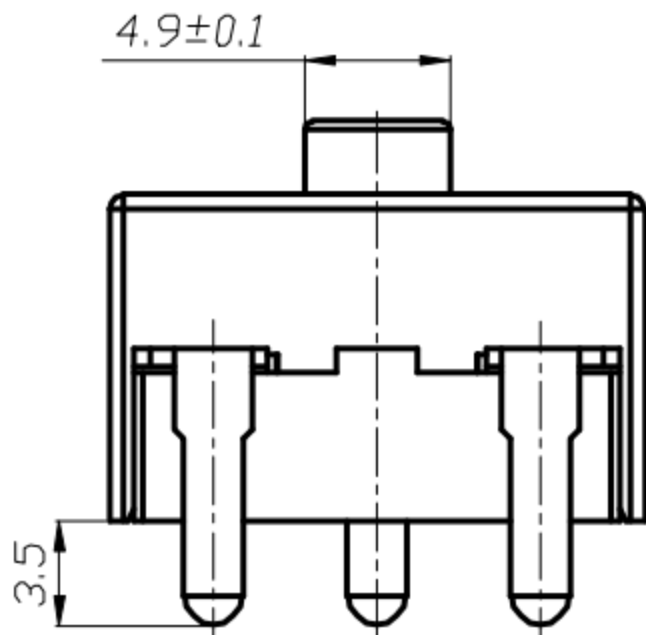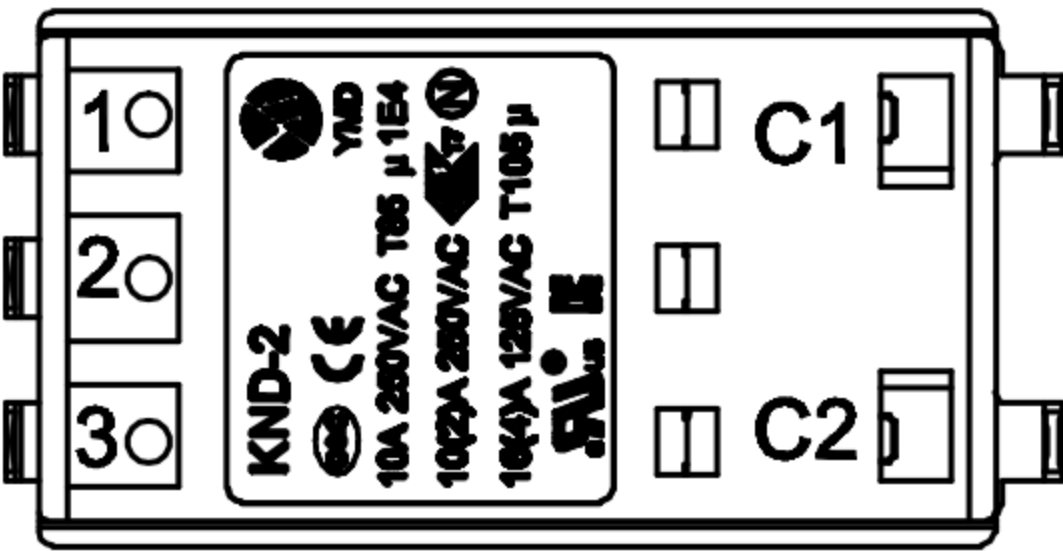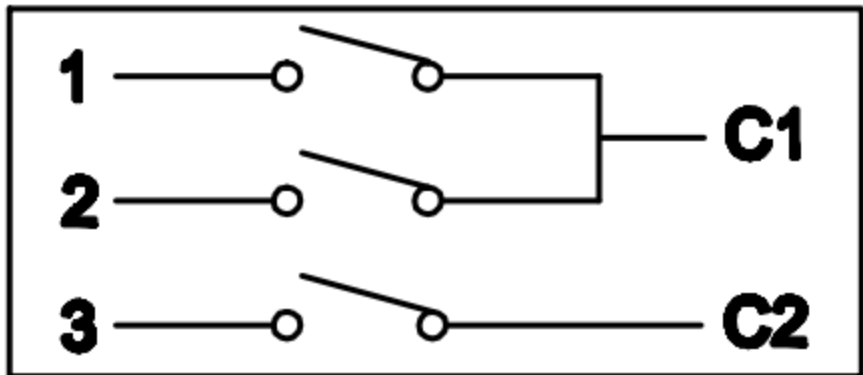

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm$ 0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : $\pm$ 0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : SLide Switch			UNIT : mm	DRWG NO.:XB-2-3BP012-R2
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					