
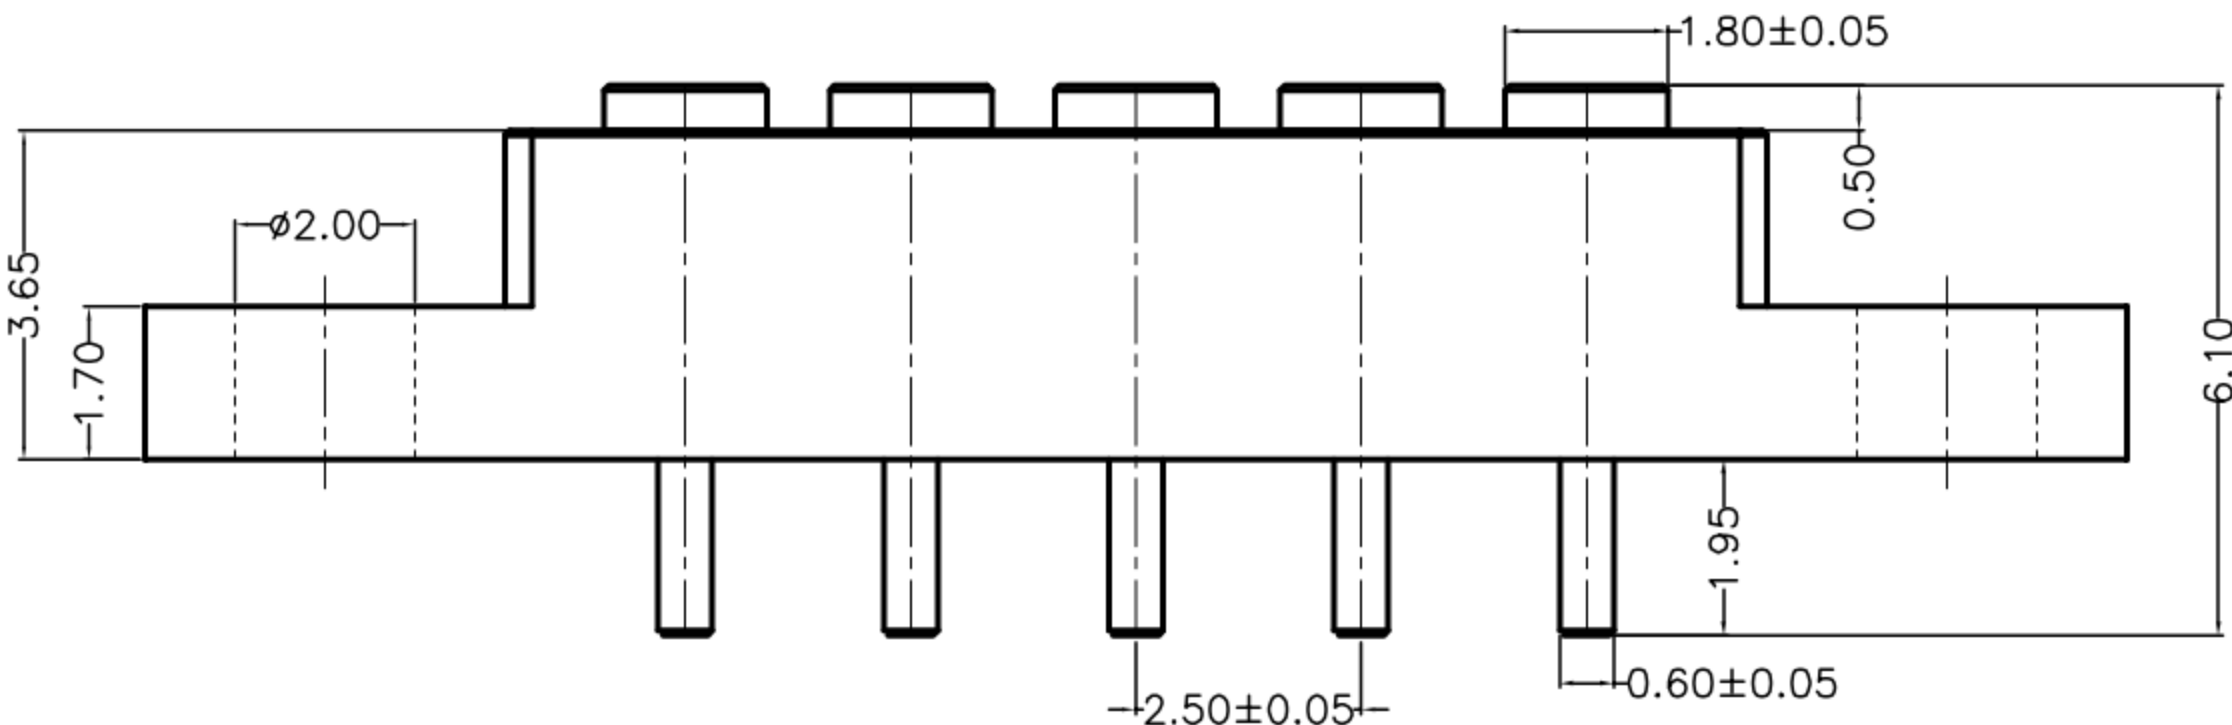


- otes:
- Characteristics:
- A. Material (材料)
 - 1) Housing:High Plastic BLACK (UL94V-0)
 - 2) Plunger:brass c3604
 - B. Plating (电镀)
 - 1) Plunger:Brass,Plating Min. 3u' Au over Min. 50u'
 - C. Electrical (电气性能)
 - 1) Operating voltage: 12V Max.
 - 2) Opetating current: 3A Max.
 - 3) Contact resistance: 30mohm Max. at working height(Quiescence).
 - D. Environmental (工作环境)
 - 1) Storage and operating temoperature range: -40°C~ +85°C
 - 2) Humidity range: 10% RH to 90% RH
 - 3) Salt spray: 48H
 - E. Others (其它)
 - 1) The dimensions marked * are critical, Should be checked in production
 - 2) RoHS compliant product.

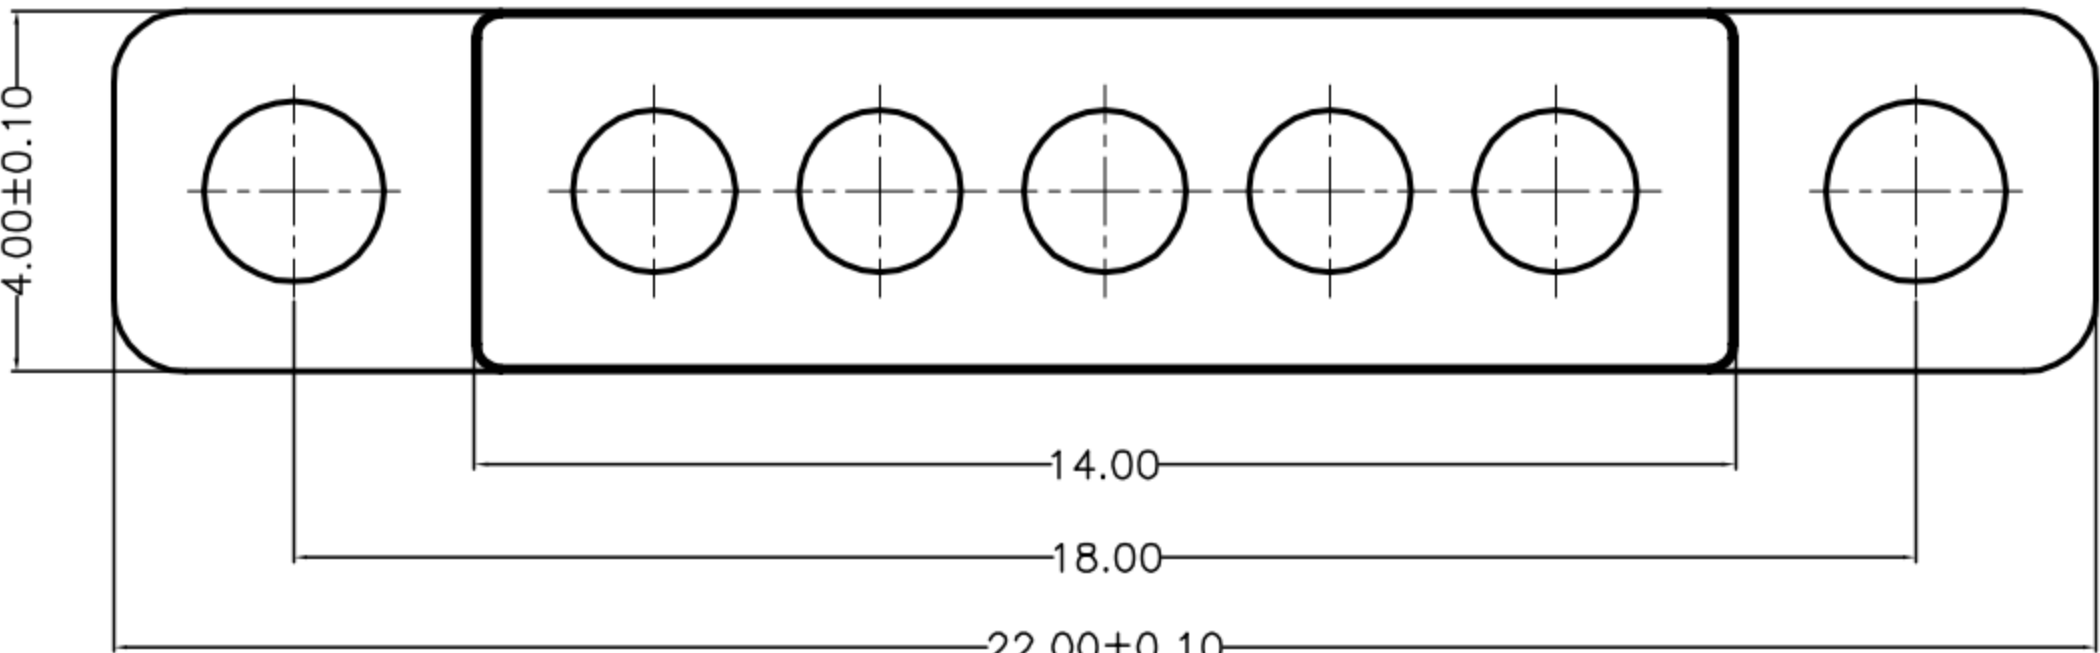


东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	04/01/21				
CHECKED BY:	DATE	FINISH		MODLE	POGO PIN
Jacky Chen	04/01/21				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	XB-PGC-CT-250-5P-M
Tony Kao	04/01/21	SHEET NO.	1 of 1	PART NO.	Magnetic PoGo Pin