
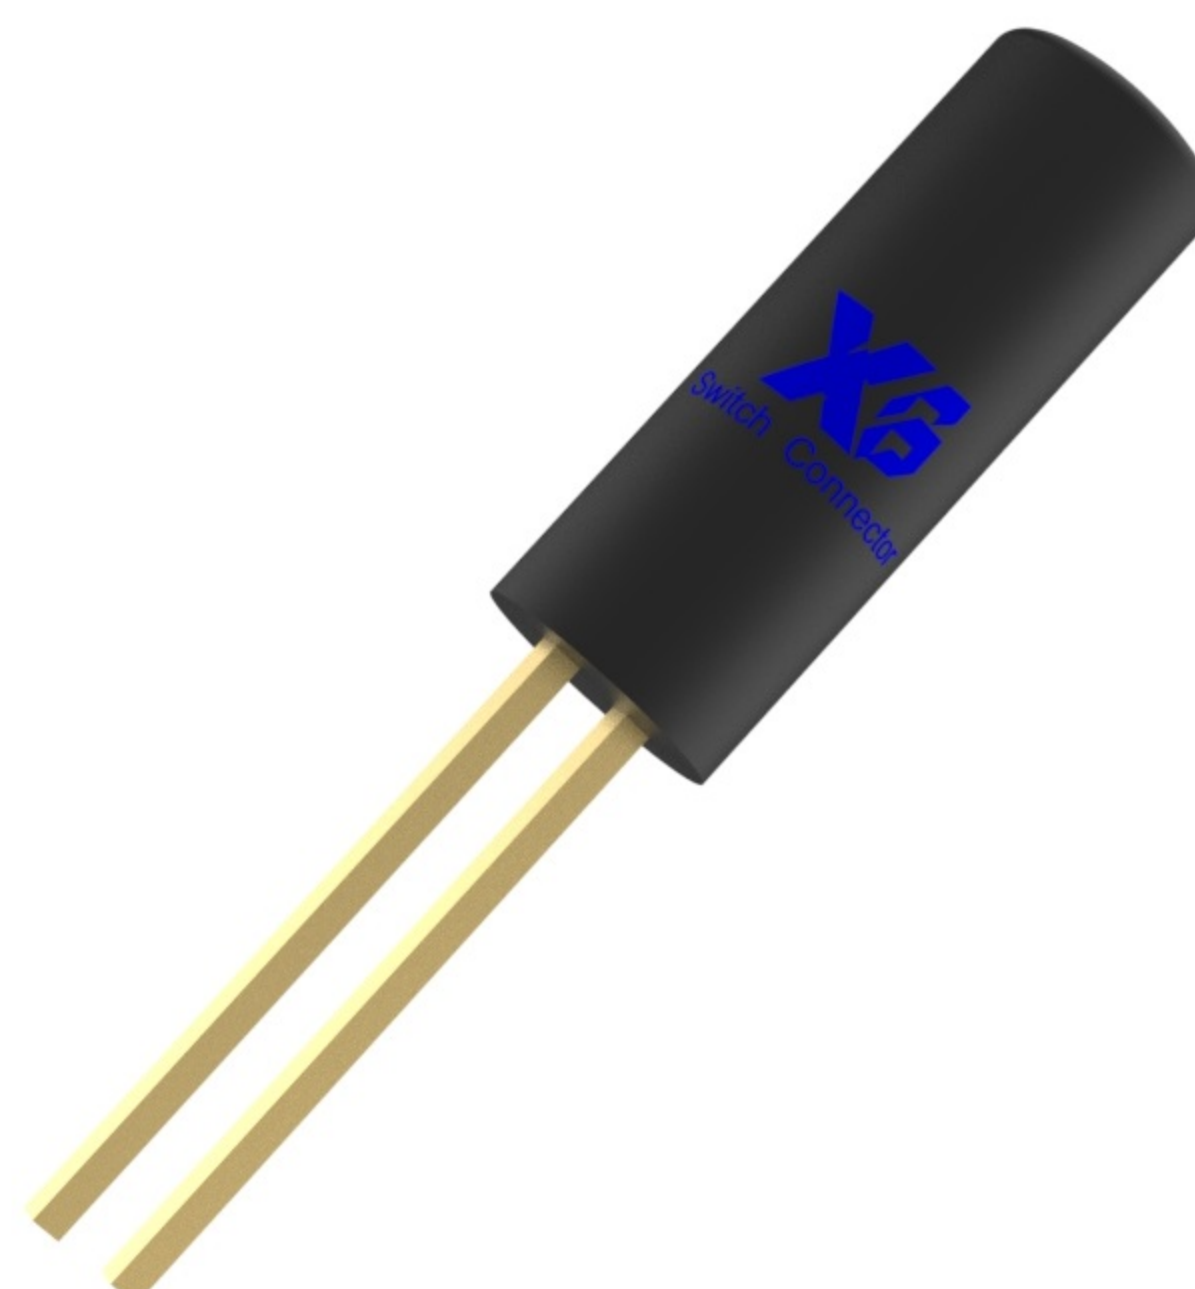
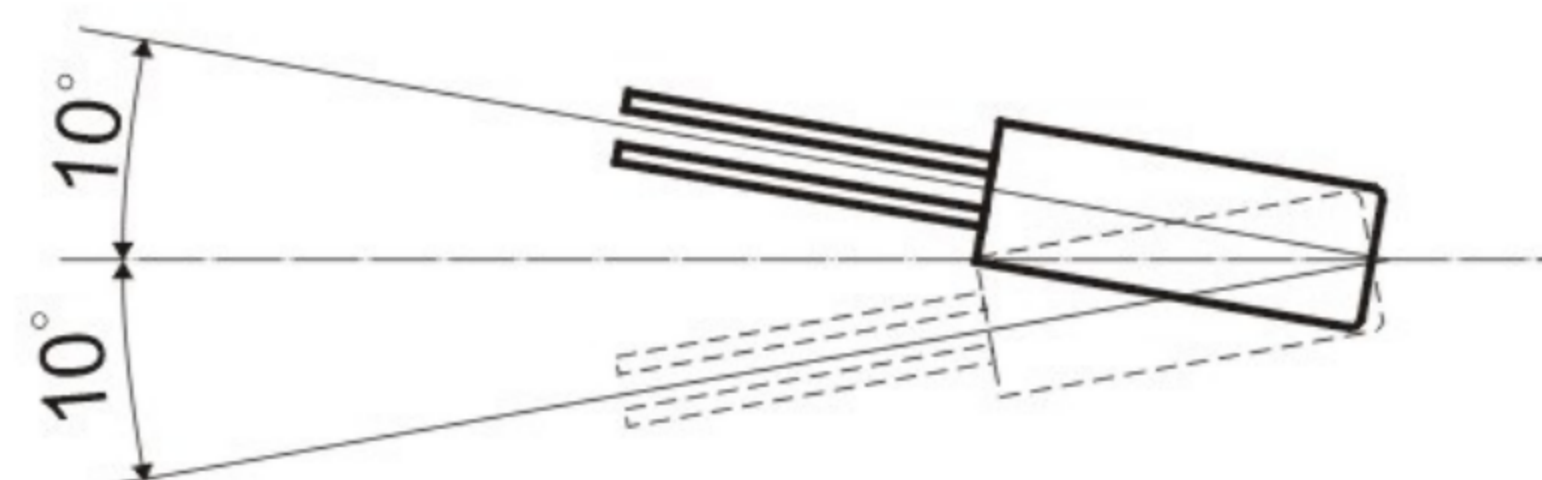


CAD FILE:

ROHS

Game machines and toys, Security systems, Electrical and electronic products, Personal security alarms, Vibration sensors, Car alarms.

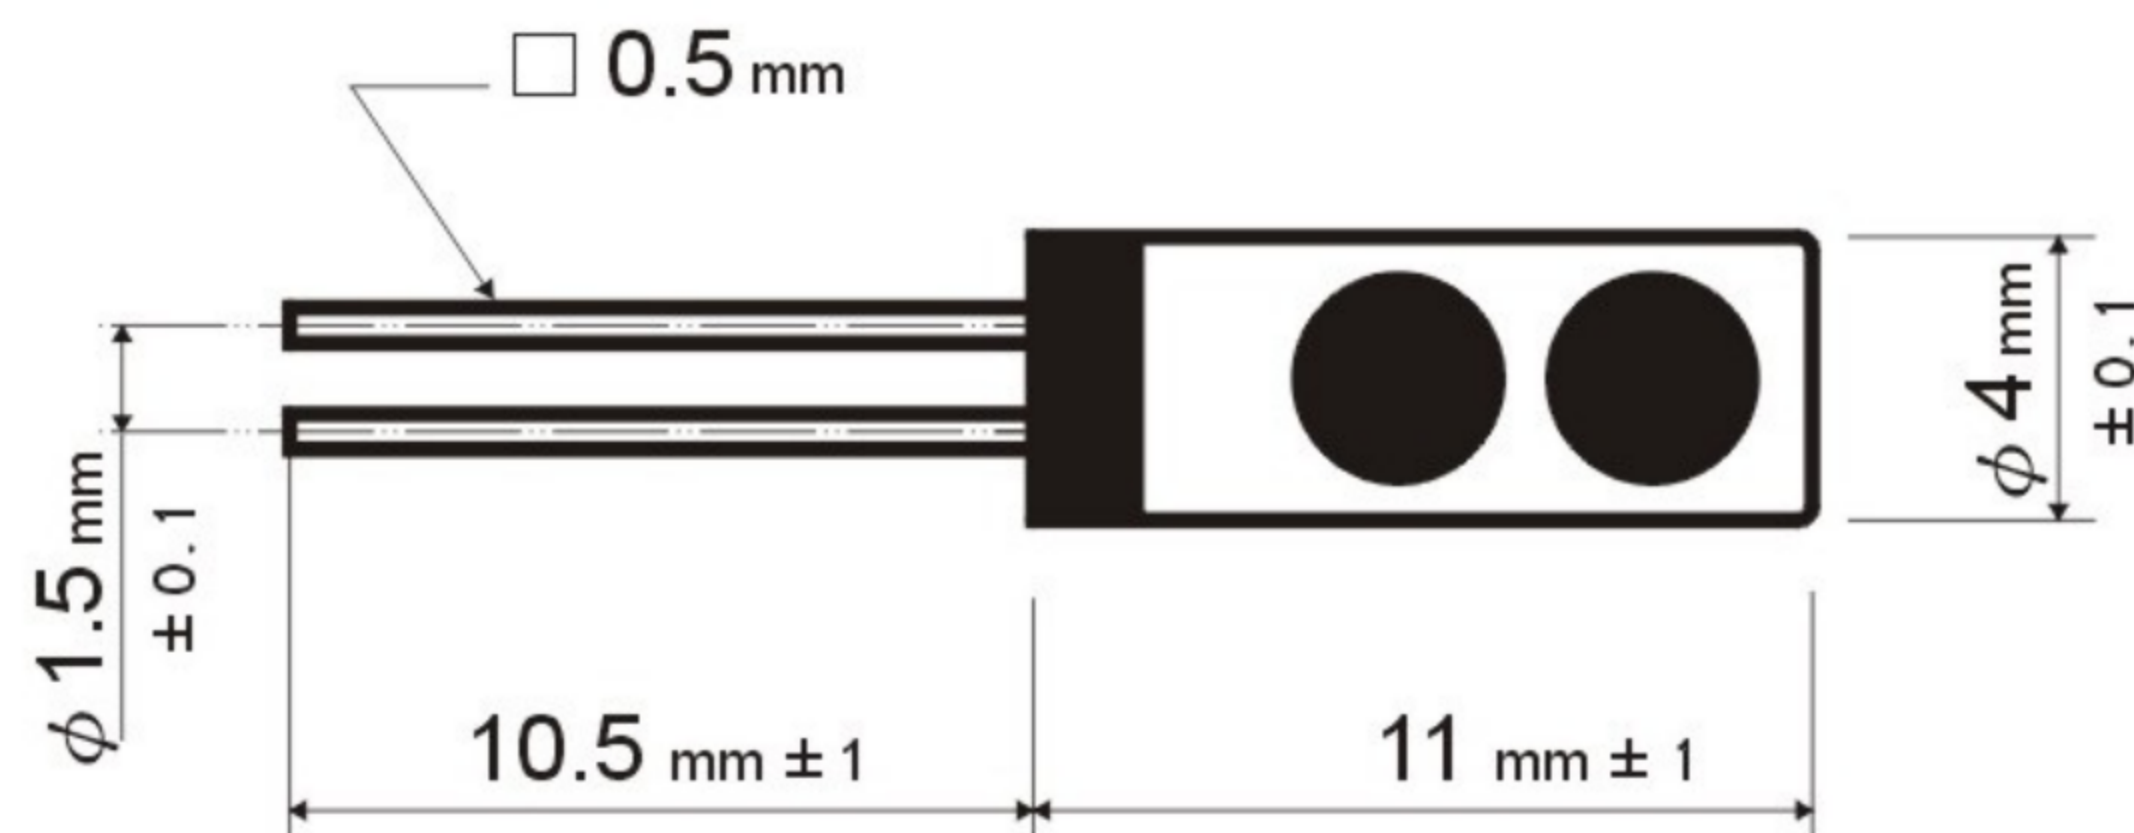

1. Maximum Switch Rating : 24VDC, 6mA
2. Electrical Life : 100,000 cycles Min.
3. Contact Resistance : 0.5 Ω Max.
(Measured at 45° tilt)
4. Differential Angle : 10° Max.
5. Solder Temperature : Manual soldering 350°C, 3~5 seconds.
6. Operating Temperature : -25°C~85°C

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Vibration Switch			UNIT : mm	DRWG NO.: XB-HBT411
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					