



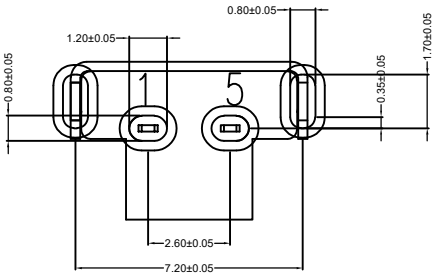

REV.	ZONE	DESCRIPTION	DESIGN	DATE
A		NEW		






RECOMMENDED PCB LAYOUT

- 备注:
- 产品规格:
 - 1-1. 插入力: 35N MAX.
 - 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 1500 CYCLES
 - 1-3. 额定电流: 1.0A
 - 1-4. 额定电压: 30V
 - 1-5. 耐久性: 1500 CYCLES MIN.
 - 1-6. 耐电压: 100V AC MIN.
 - 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 1500 CYCLES
 - 1-8. 绝缘电阻: 100MΩ MIN
 - 1-9. 工作温度: -30° TO +80°
 - 材质:
 - 2.1 胶芯: LCP UL94V-0
 - 2.2 端子: C2680R-H, 镍底, GOLD
 - 2.3 外壳: SPCCorSUS, 表面镀镍60-100 μ
 - 所用材质须符合RoHS要求
 - 重点尺寸标识“▲”符号

MICRO USB B TYPE PIN ASSIGNMENTS

PIN NUMBER	1	2	3	4	5
SIGNAL NAME	VBUS				GND

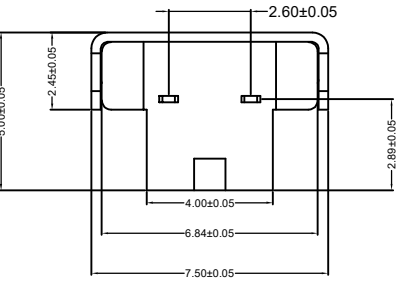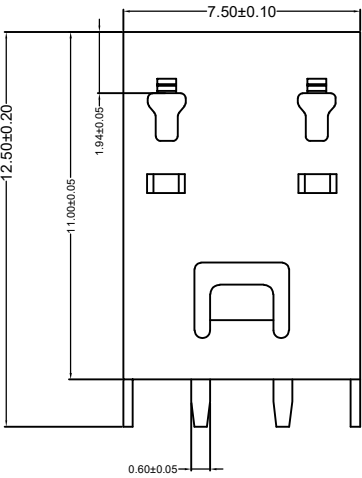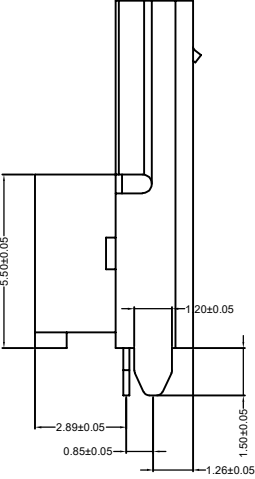

X.
.X
.XX
.XXX

± 0.50
± 0.30
± 0.10
± 0.05

X.*
.X*
.XX*
.XXX

± 2*
± 1*
± 0.5*
± 0.05

UNITS
mm

MAT'L

FINISH

Q'TY

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE:
MICRO 2PIN加长立式直插11母座短脚

APPD: PENG.GAO
CHKD: ZHAN.Ni.RANG
DR: FEI.LONG.HE

DWG NO.:
XB-GMF5-2PA-110/1060002

SCALE
1/1

SHEET
1/1

REV.
A