




MRUSB-5B-D2Bx-S347

SHELL 鍍層:

TN
NI

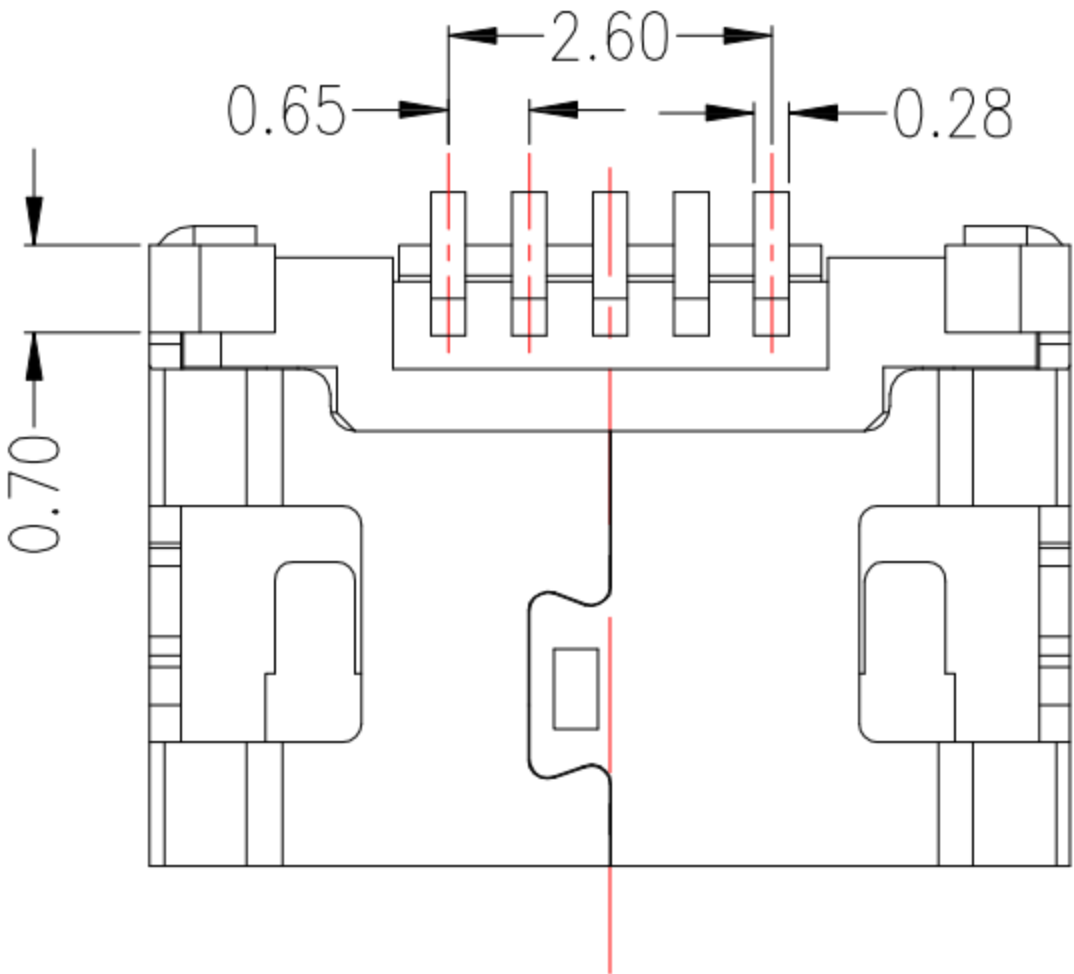

NOTES:

MATERIAL:



- 1.1 HOUSING: LCP, UL94V-0 ,Black
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: BRASS

FINISH:





- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER OR
TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:

- 3.1 RATING: 1.5A(PIN1&8), 1.0A(PIN2&3&4)
- 3.2 DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TOTAL MATING FORCE: 3.57 Kgf MAX.
- 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
- 3.7 TEMPERATURE RANGE: -30°C ~ +80°C

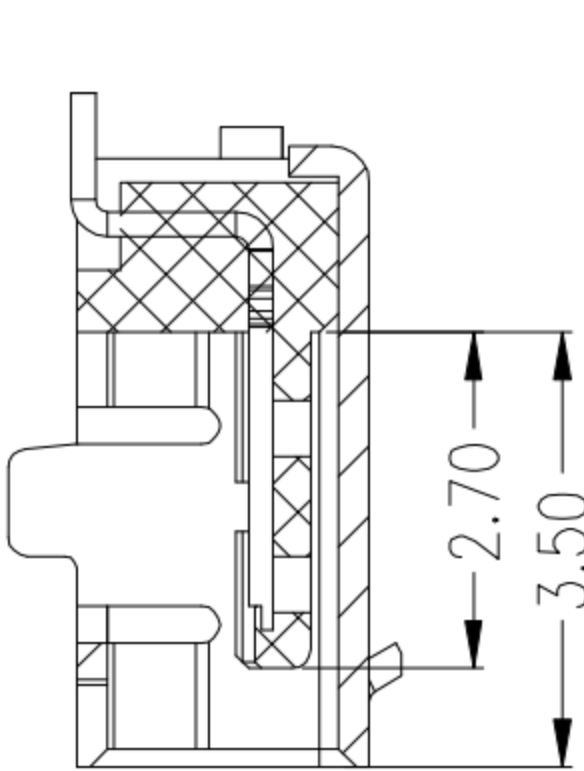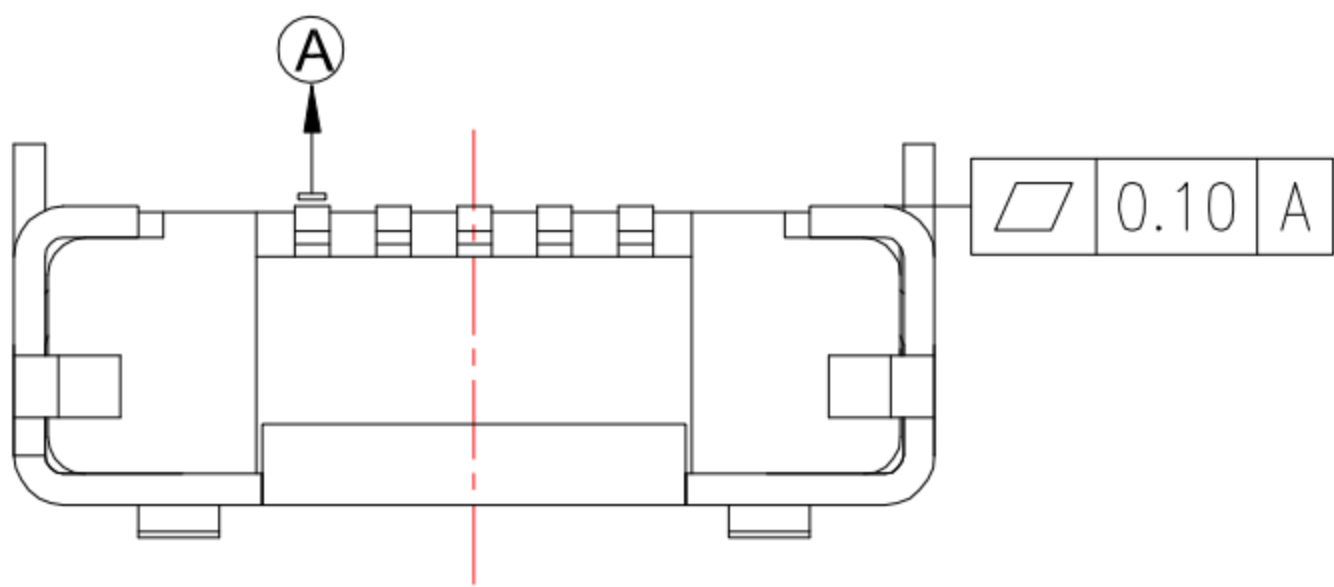

SECTION A-A'

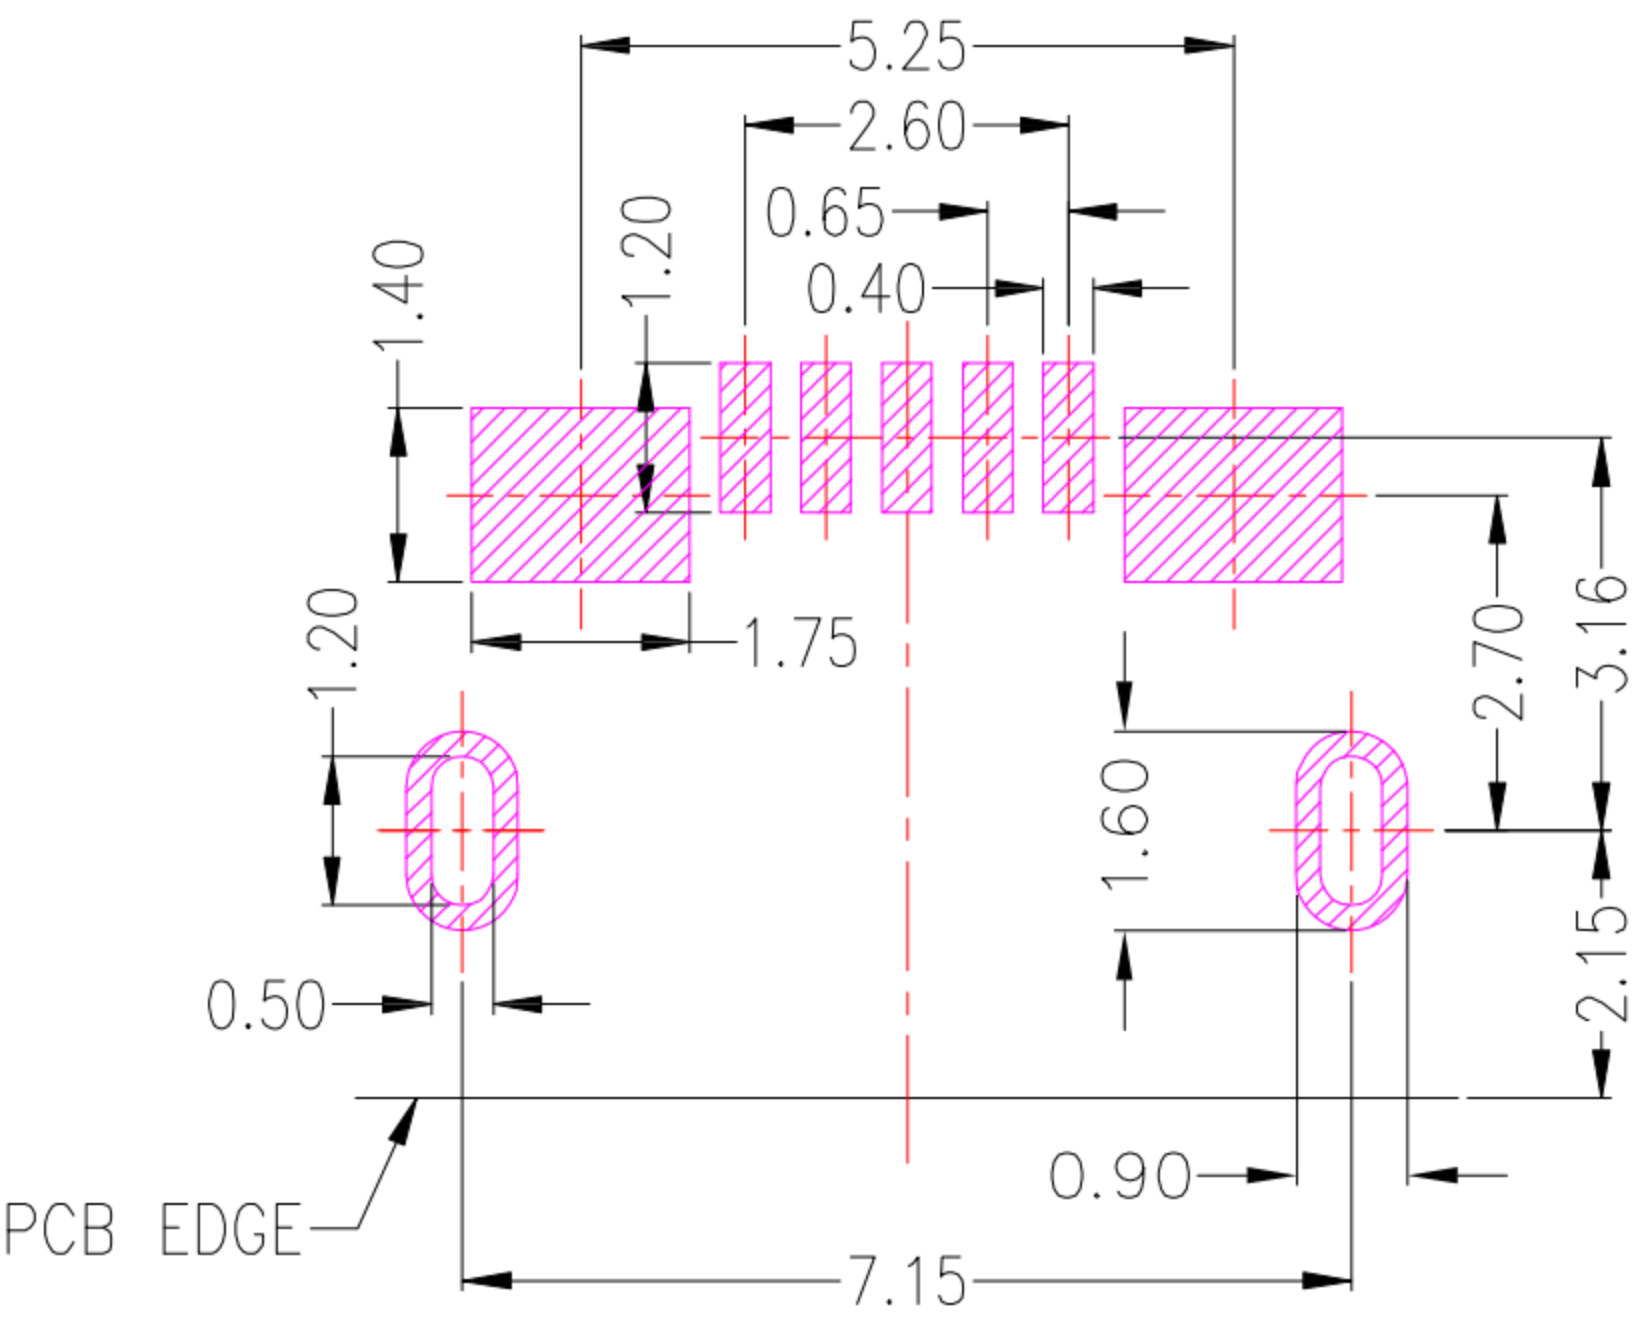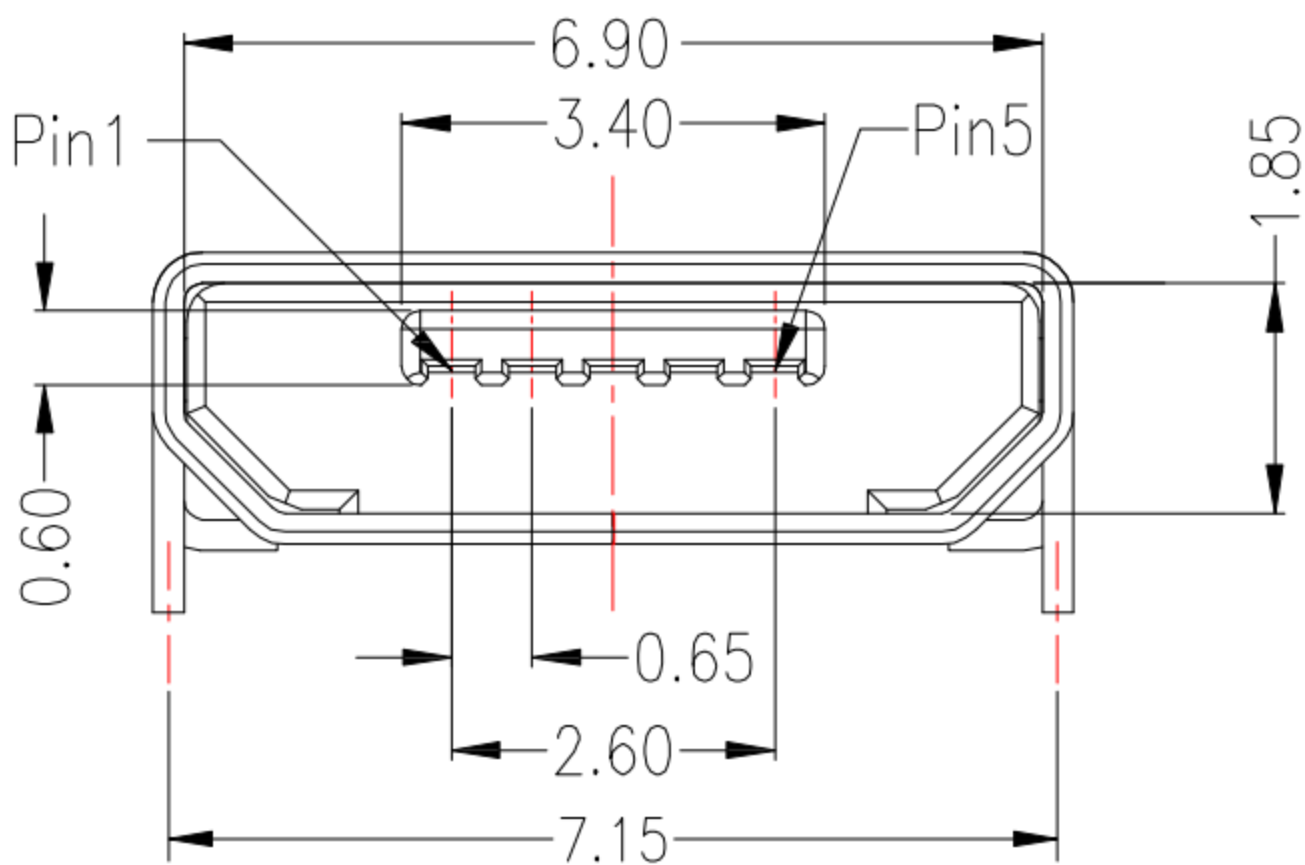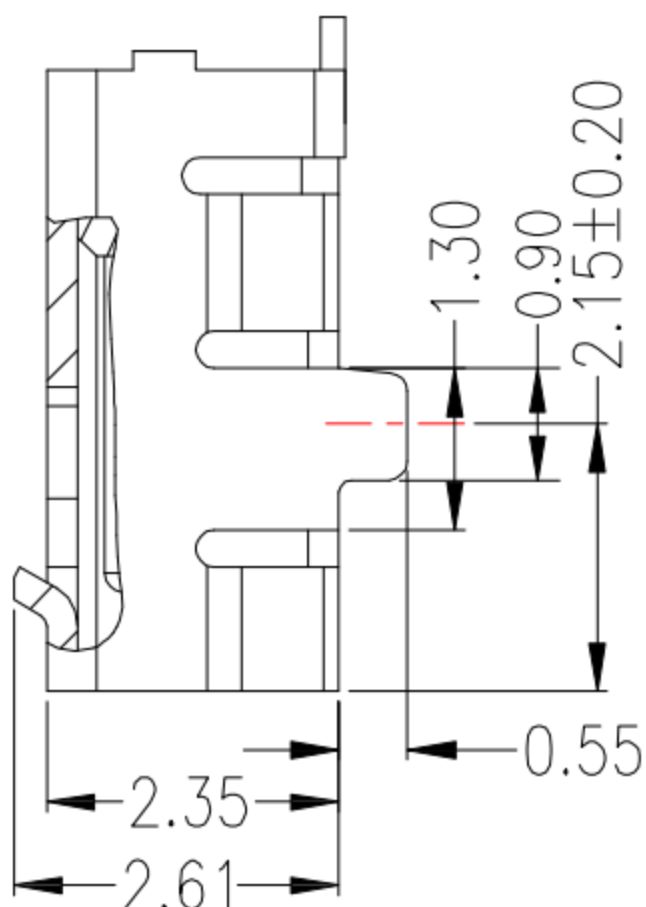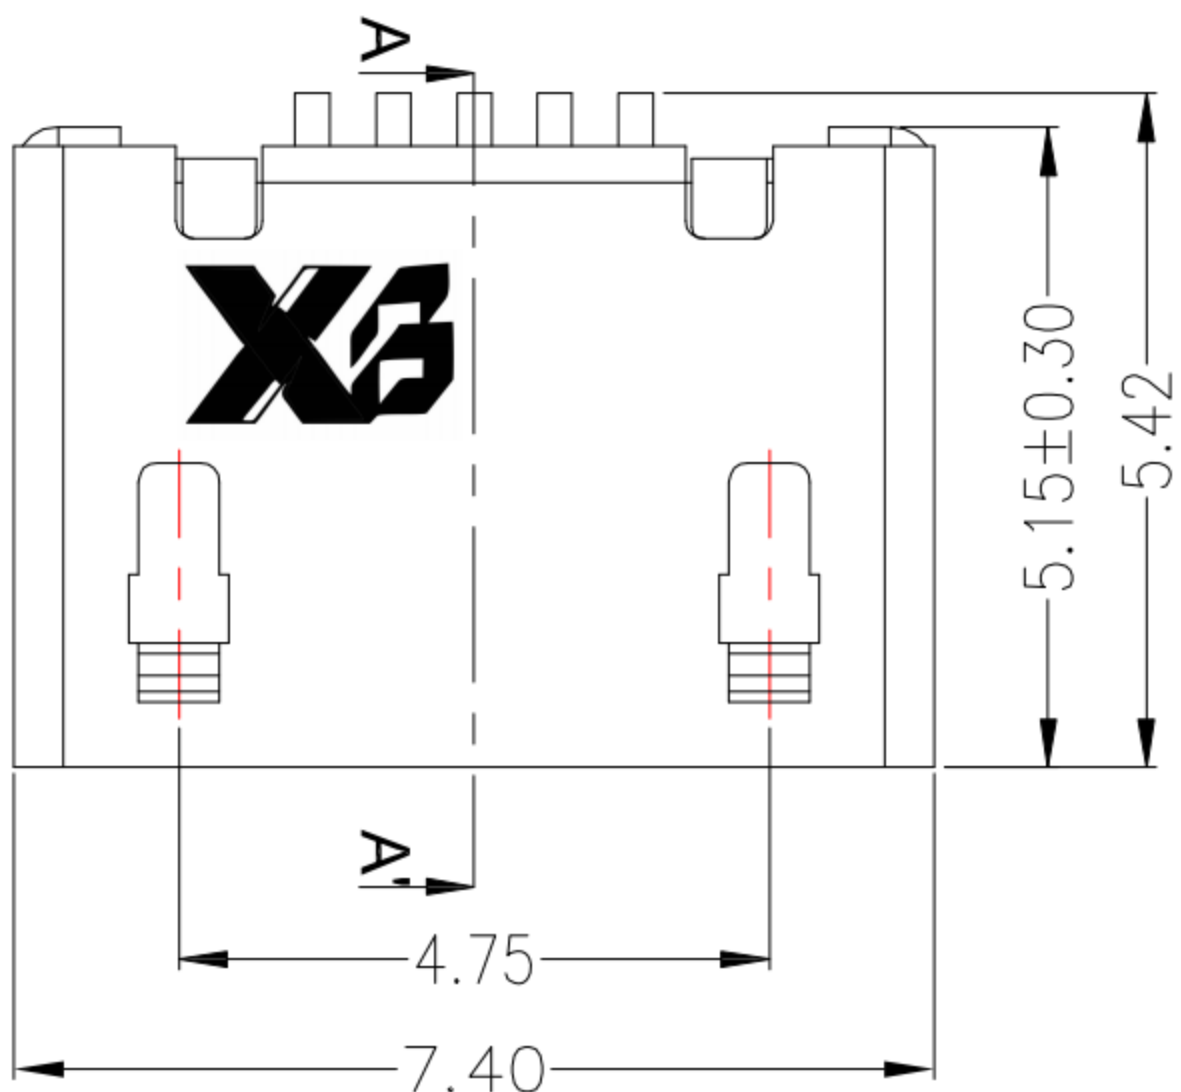

P.C.B LAYOUT MOUNTING PATTERN



TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	01/16/19	FINISH	MODLE	MICRO USB 5P/F 貼片 無捲邊 無柱 前插(7.15)後貼
CHECKED BY:	DATE	SCALE	DWG NO.	MRUSB-5B-D2Bx-S347
Jacky Chen	01/16/19	1 : 1	PART NO.	MRUSB-5B-D2Bx-S347
APPROVED BY:	DATE	SHEET NO.	1 of 1	SIZE A4 VER R1
Tony Kao	01/16/19			

1	新增尺寸	Jack	011619
ITEM NO.	DESCRIPTION	DRAWN	DATE