

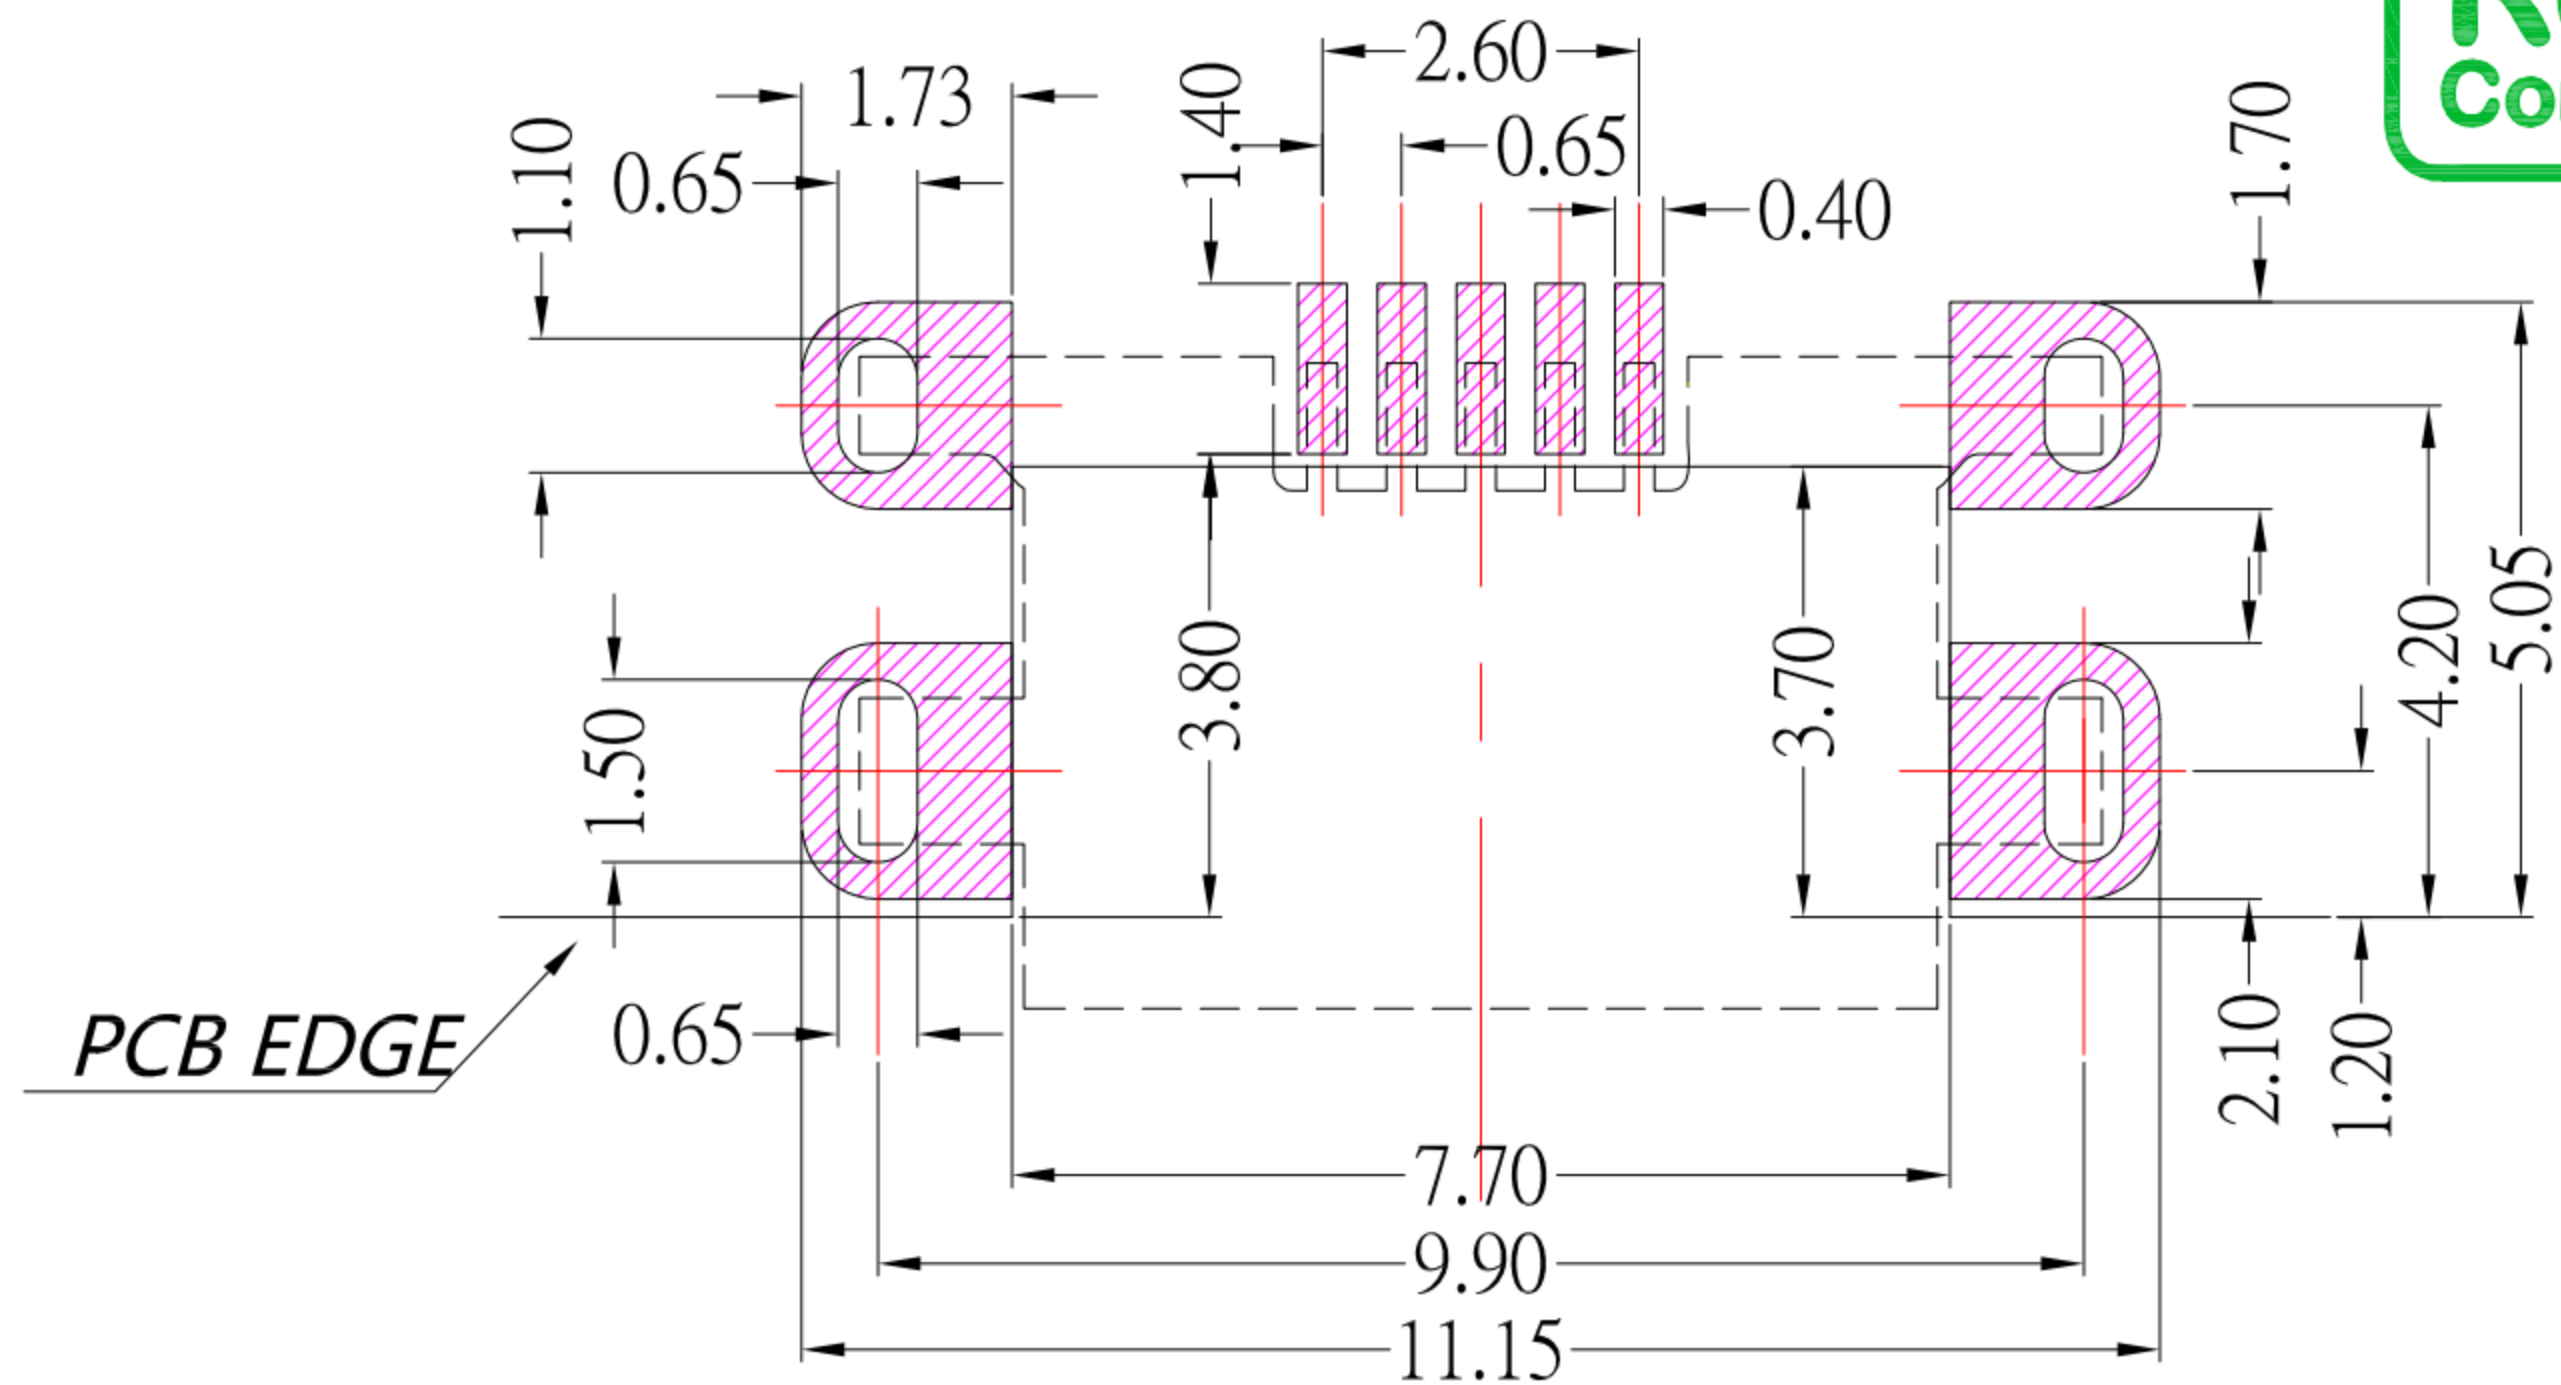
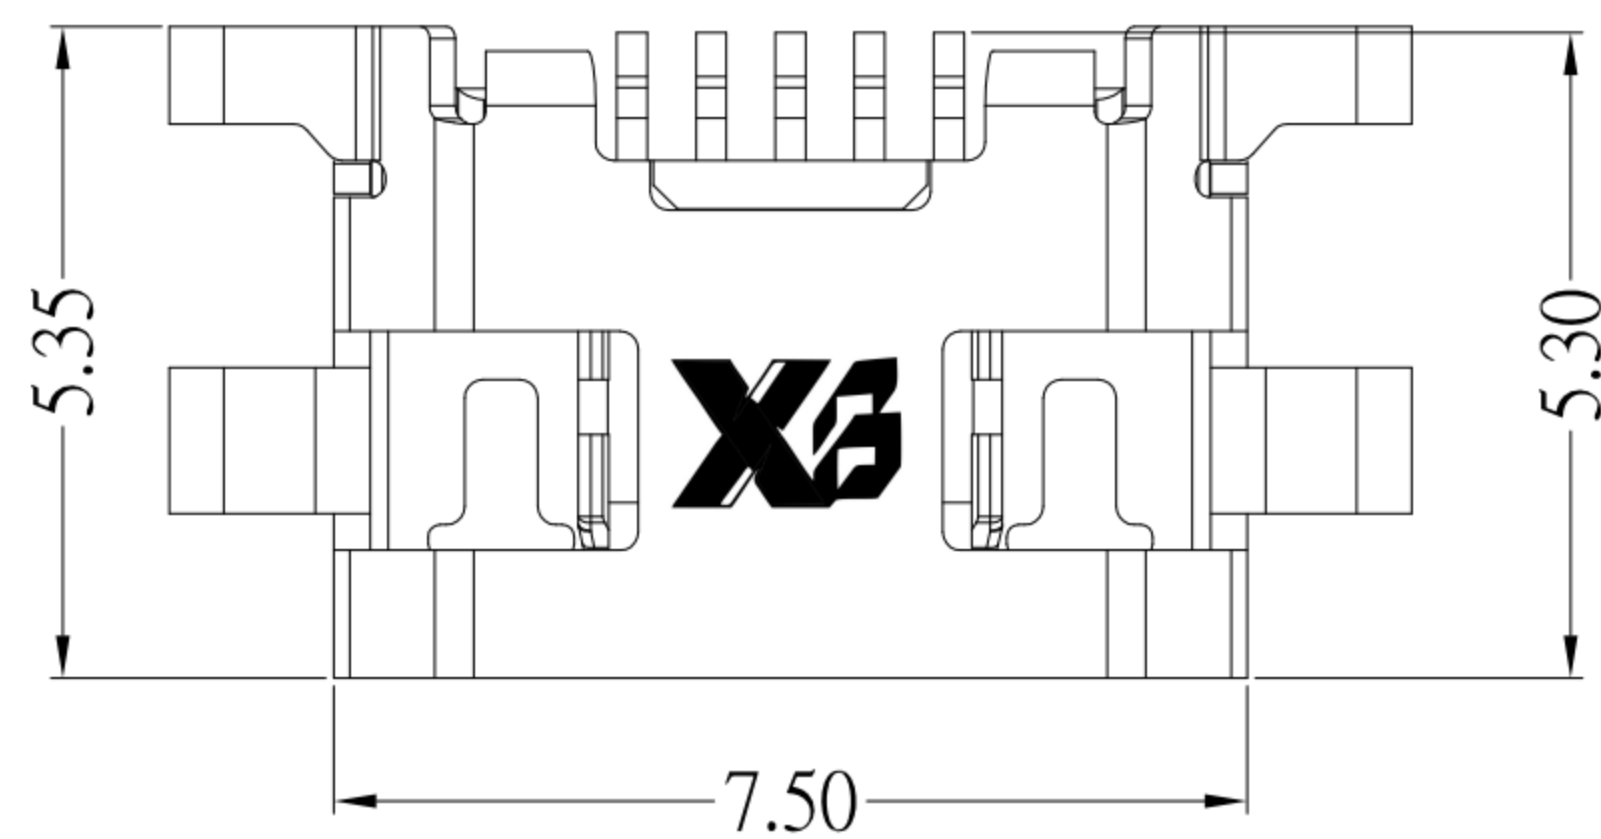
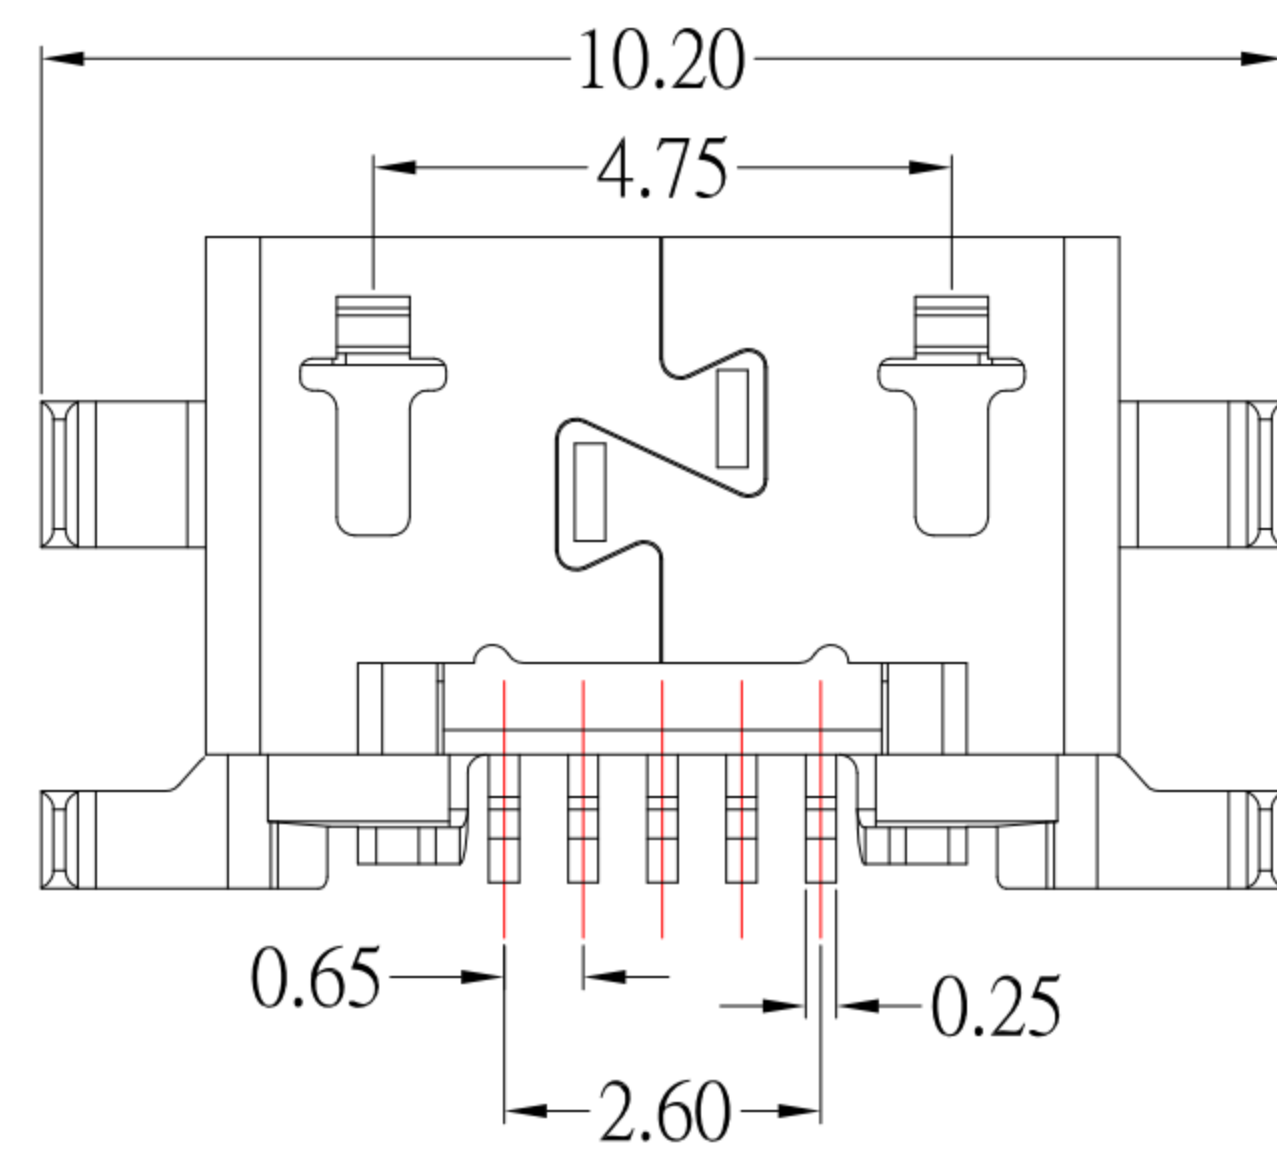
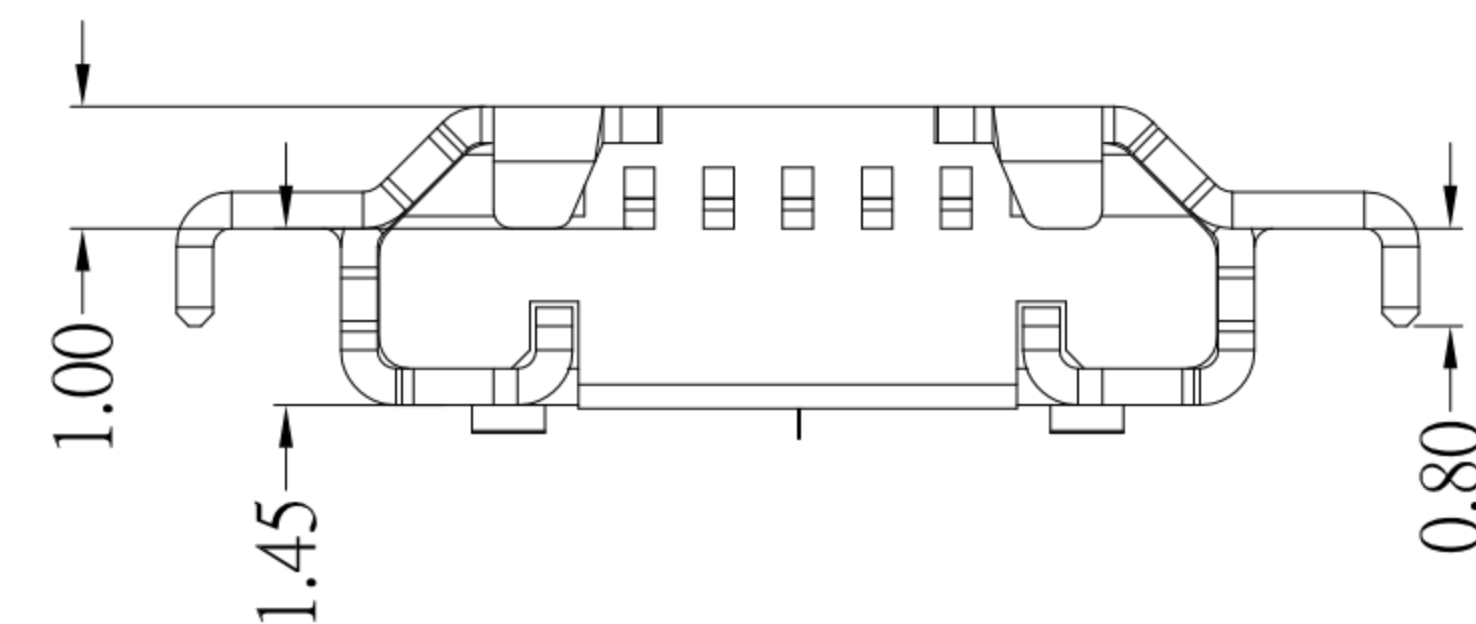
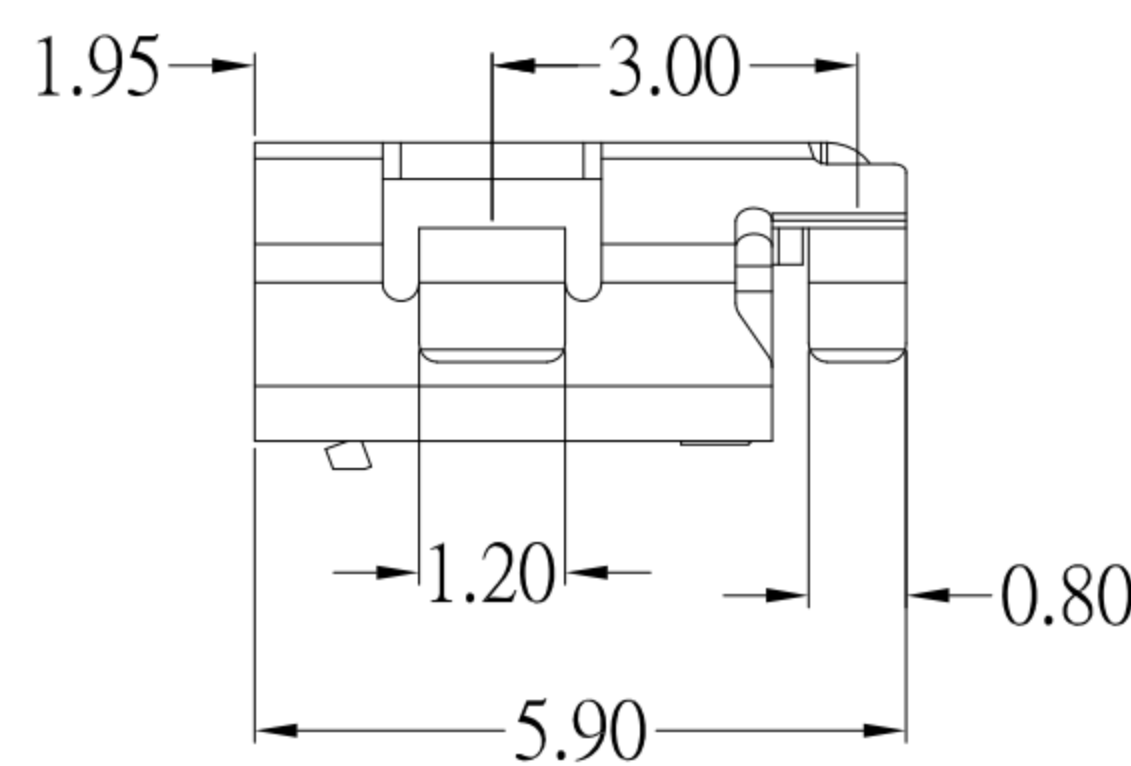


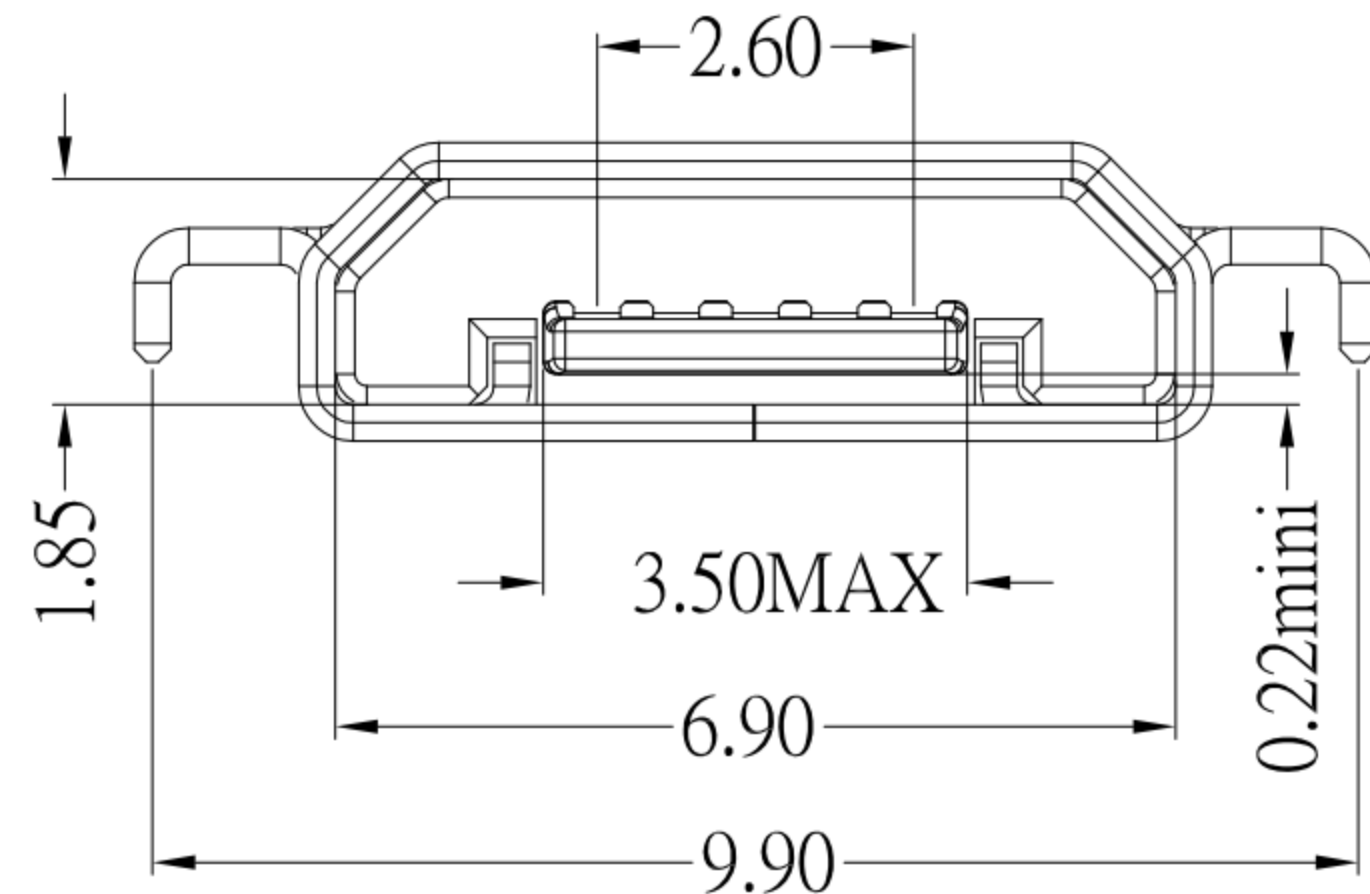

P.C.B LAYOUT MOUNTING PATTERN

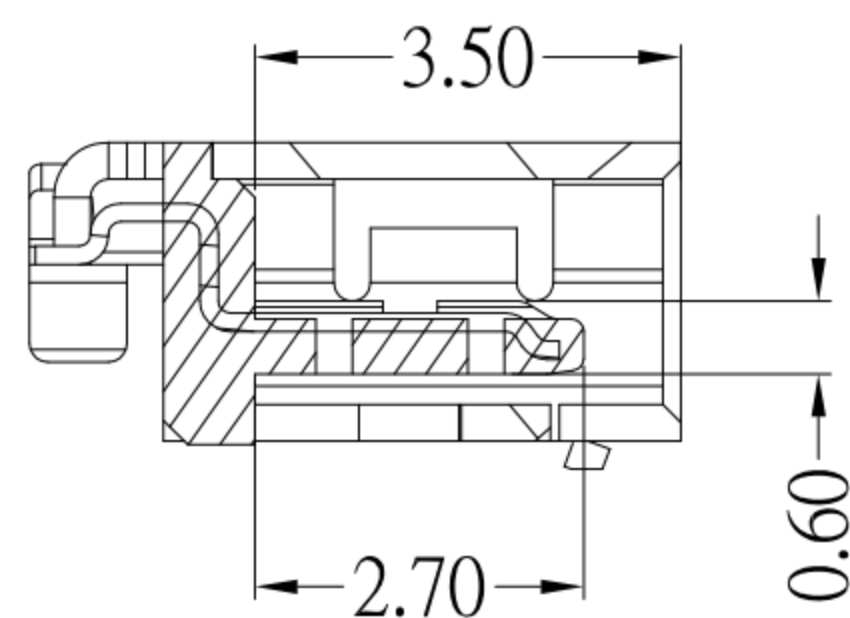

NOTES:

1.MATERIAL:

- 1.1 HOUSING: PA9T,BLACK
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 SHELL: SUS

2.Finish:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: TIN UNDER PLATED SURFACE LAYER

3.SPECIFICATION:


- 3.1 CURRENT RATING: 1.8 A MAX(PIN 1 & 5)
1.0 A MAX(PIN 2 & 3 & 4)
- 3.2 VOLTAGE RATING: 100V AC
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TEMPERATURE RANGE: -30°C ~ +80°C

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	11/02/22	FINISH		MODLE	MICRO USB 反向沉板無捲邊 外殼霧錫
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	MRUSB-5B-M12RV-S347
Jacky Chen	11/02/22	SHEET NO.	1 of 1	PART NO.	MRUSB-5B-M12RV-S347
APPROVED BY:	DATE				
Tony Kao	11/02/22				

ITEM NO.	DESCRIPTION	DRAWN	DATE