
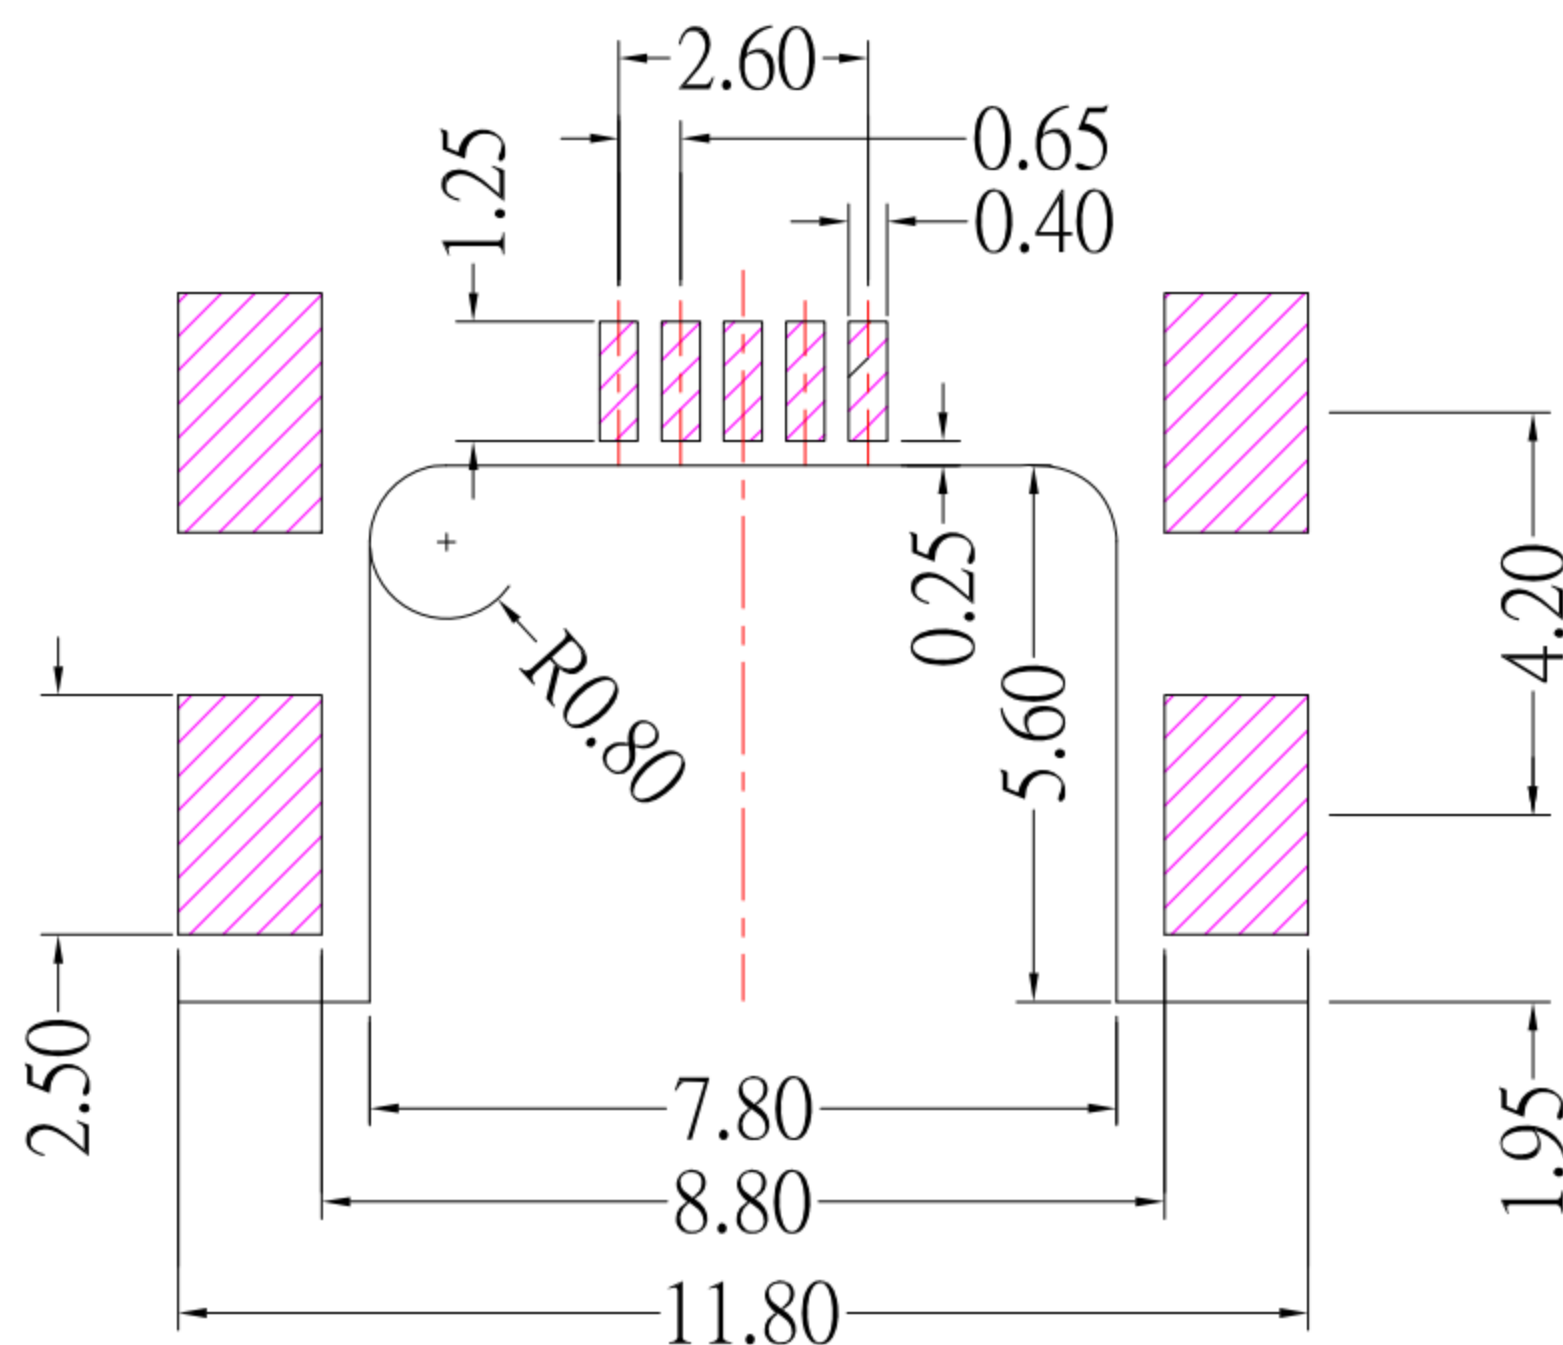
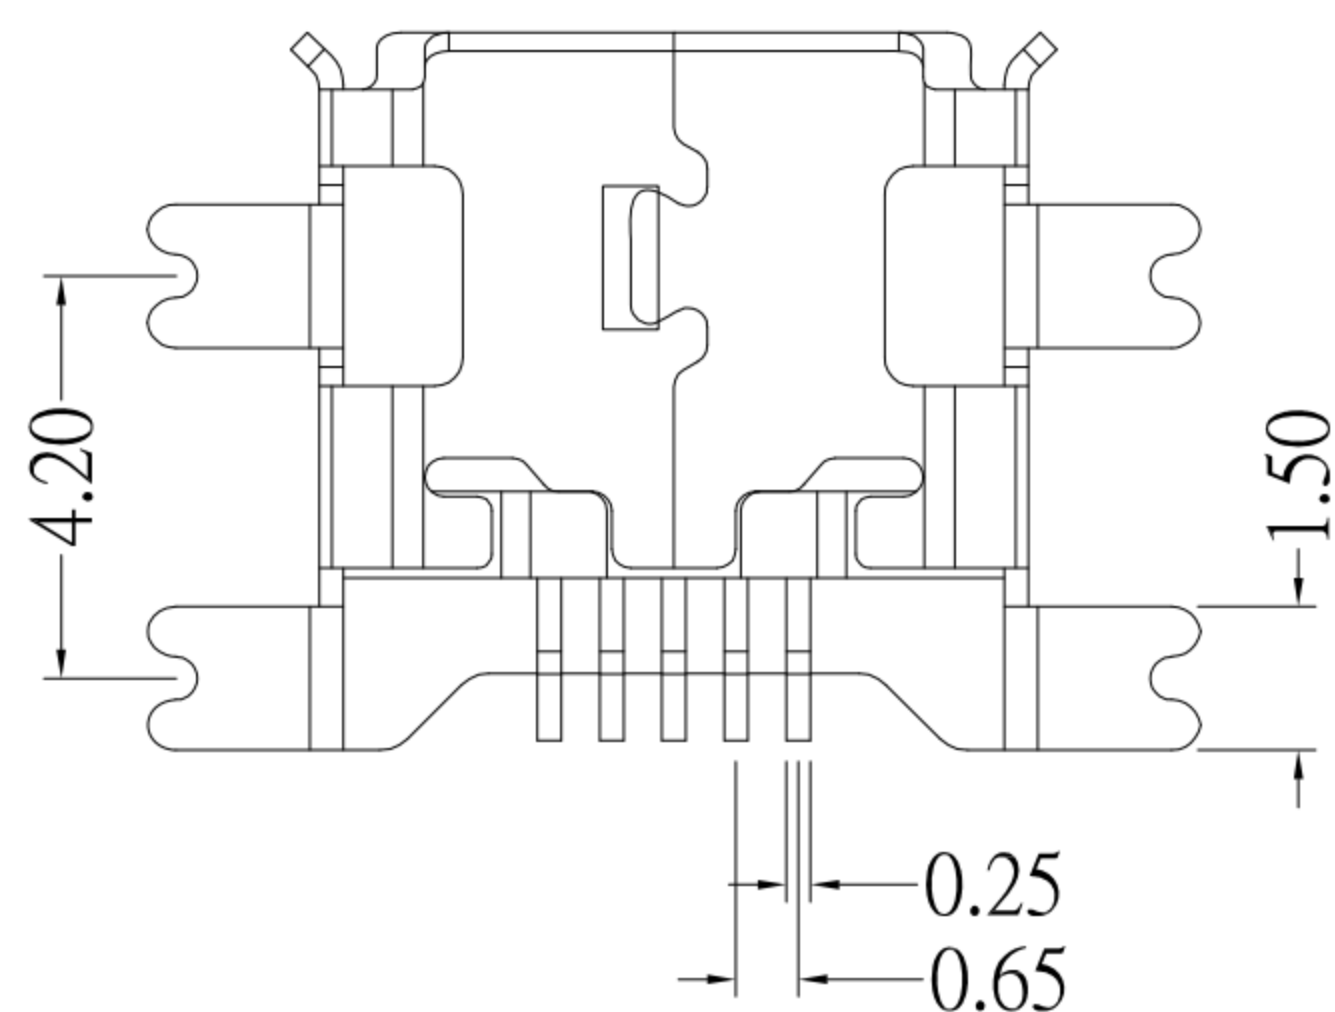
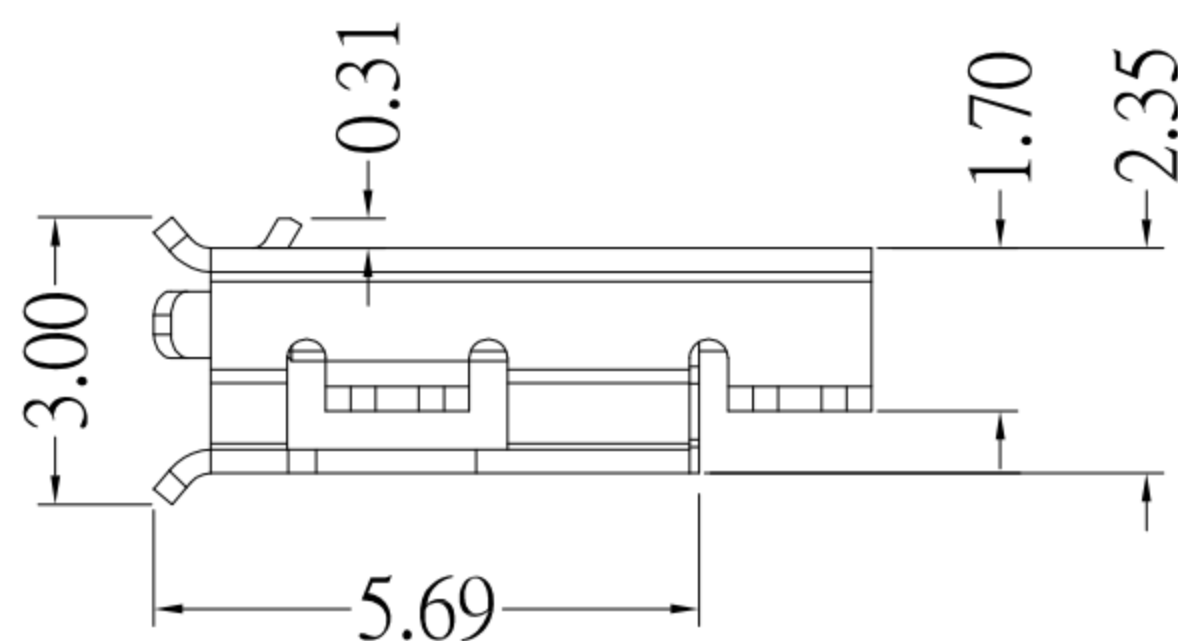
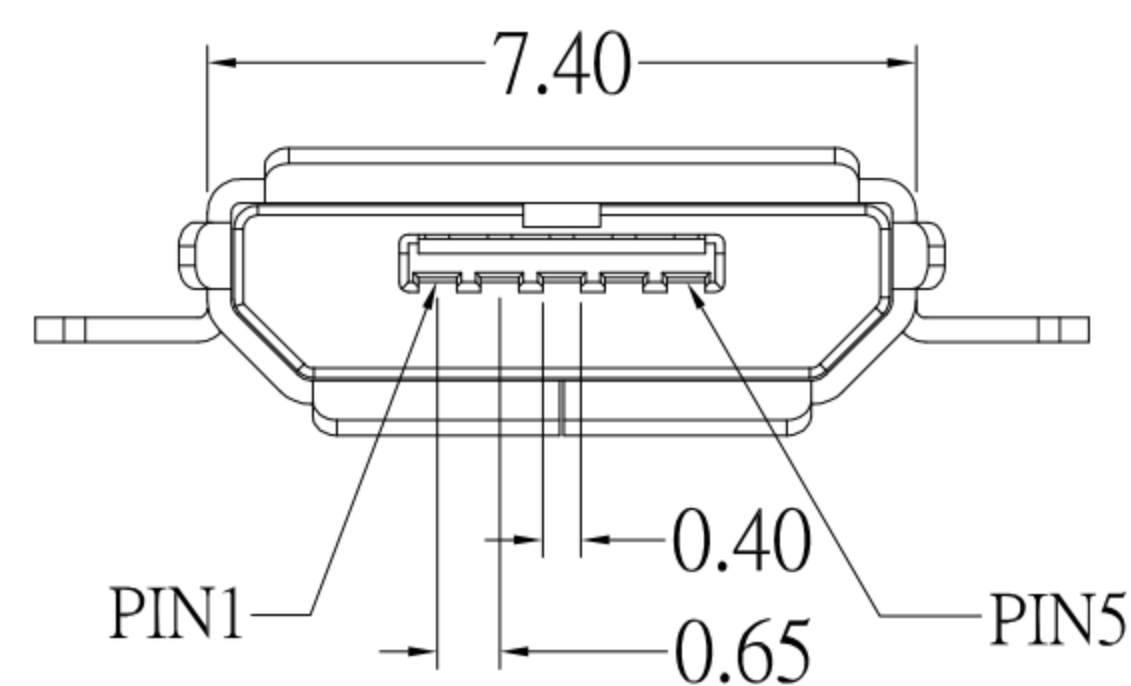


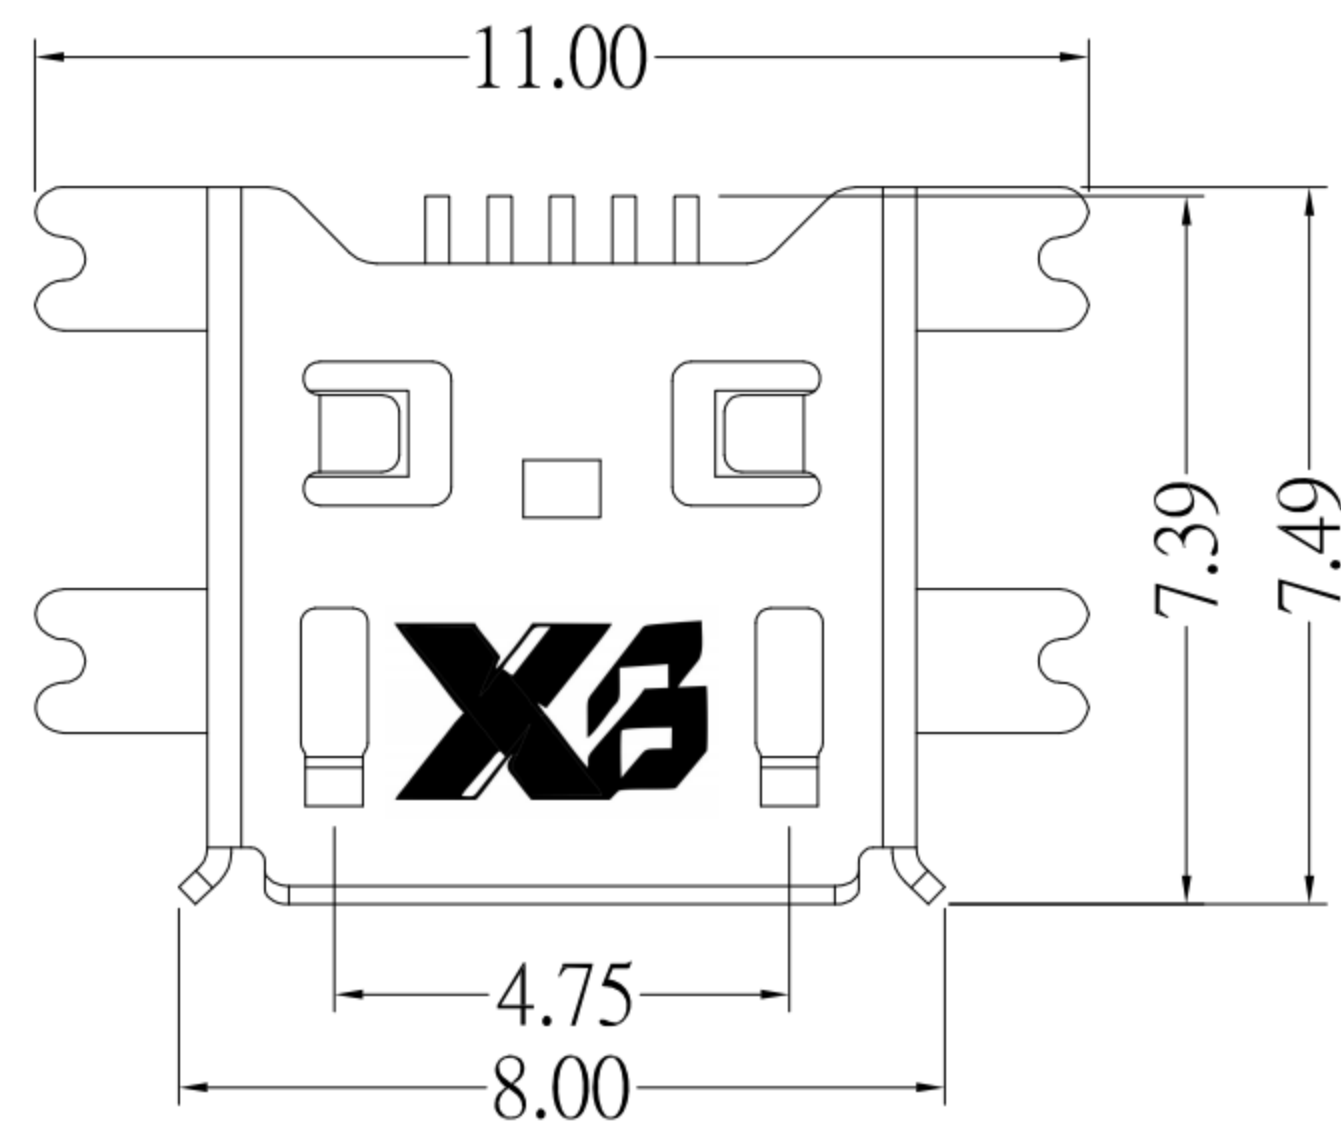

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 milliohms Max
- 4.Dielectric Withstanding Voltage:
300 V AC AT Sec Level
- 5.Insulation Resistance: 100 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.0 kgf (Max)
Unmate force: 0.7 kgf (Min)
- 2.Terminal Retention: 0.5 kgf (Min)

Material:

- 1.Housing:
High Temperature Thermal Plastics,
UL 94V-0 , LCP , Black
- 2.Contact: Phopshor Bronze
- 3.Shell: Brass

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市溪榜电子有限公司


DONG GUAN XI BANG ELECTRONICS CO., LTD

Switch Connector

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	10/24/13
CHECKED BY:	DATE
Jacky Chen	10/24/13
APPROVED BY:	DATE
Tony Kao	10/24/13

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO USB 5PF B TYPE 沉板0.7mm
SCALE	1 : 1	DWG NO.	MRUSB-5B-M3-S175
SHEET NO.	1 of 1	PART NO.	MRUSB-5B-M3-S175

SIZE
A4
VER
R1

1	更新鍍層	Jack	102413
ITEM NO.	DESCRIPTION	DRAWN	DATE