

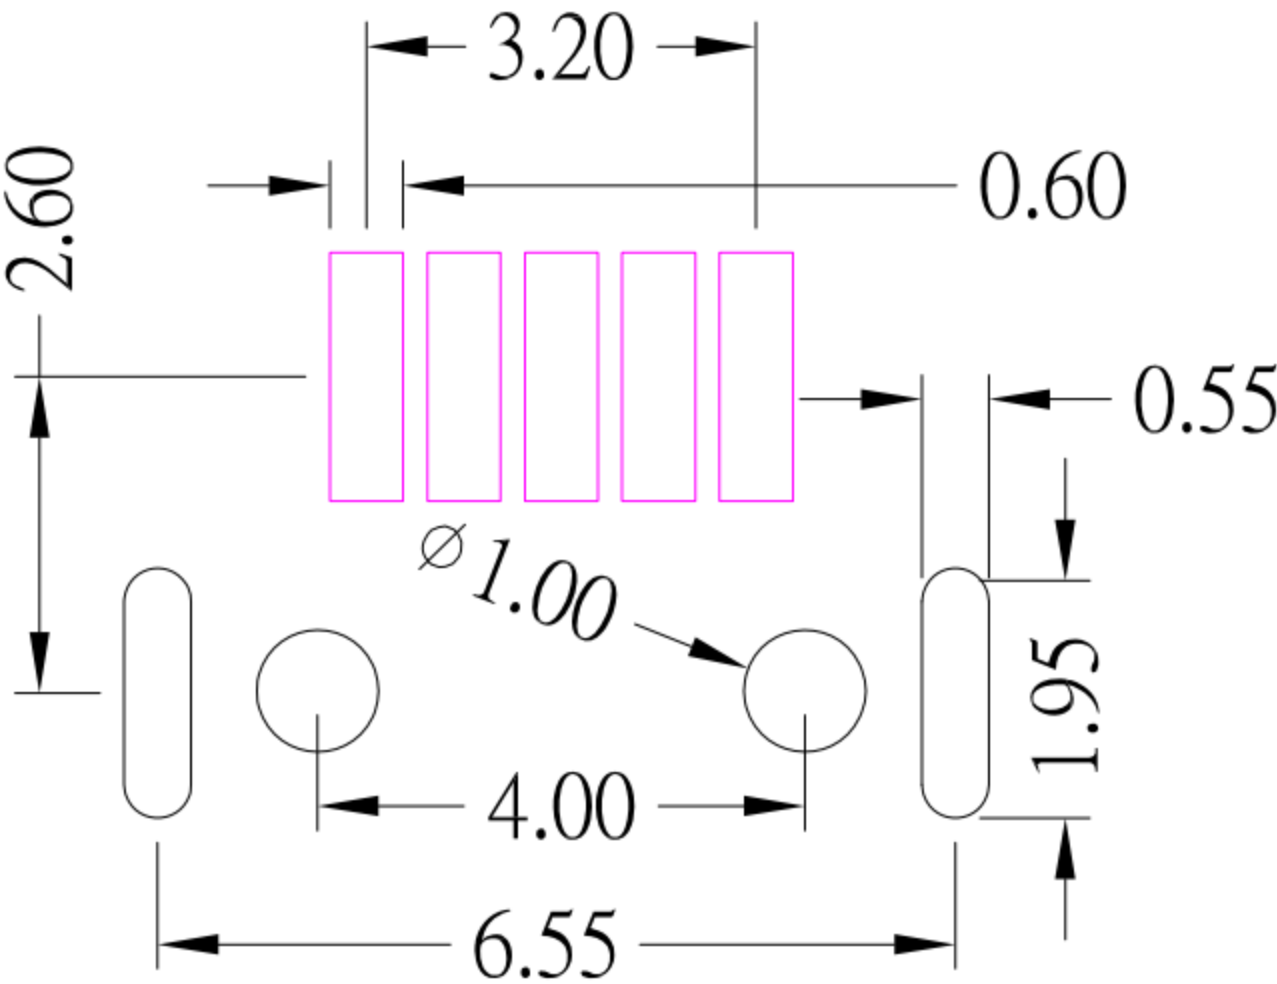
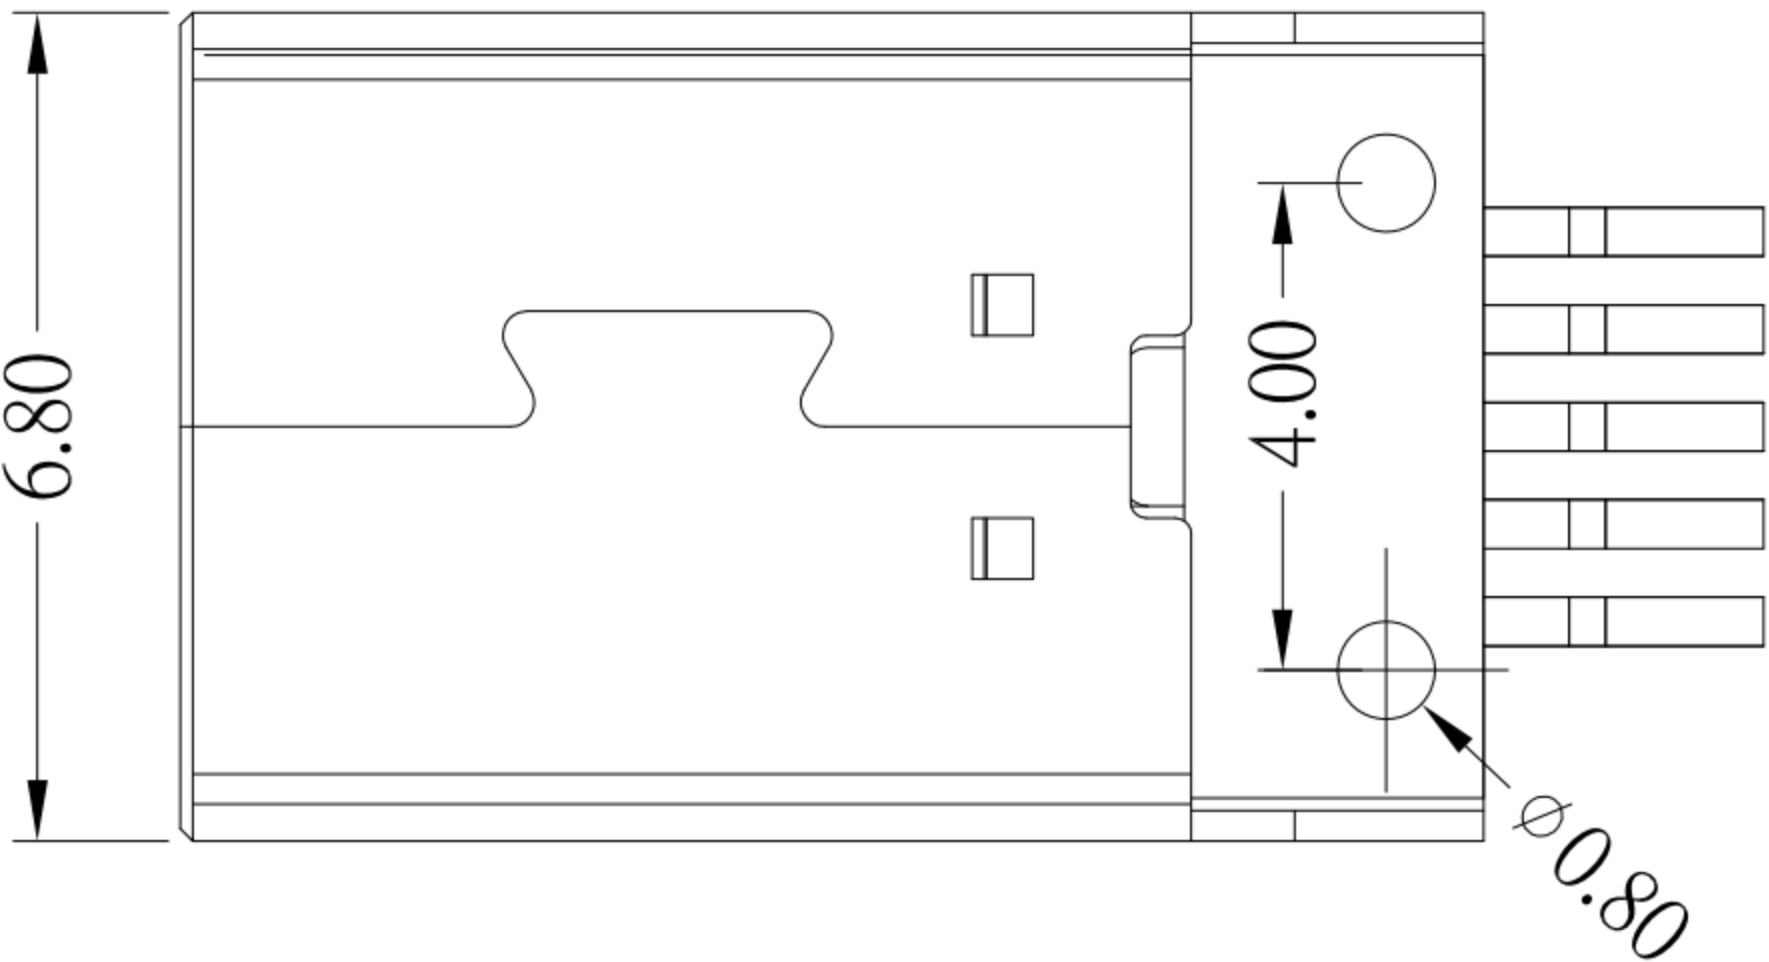
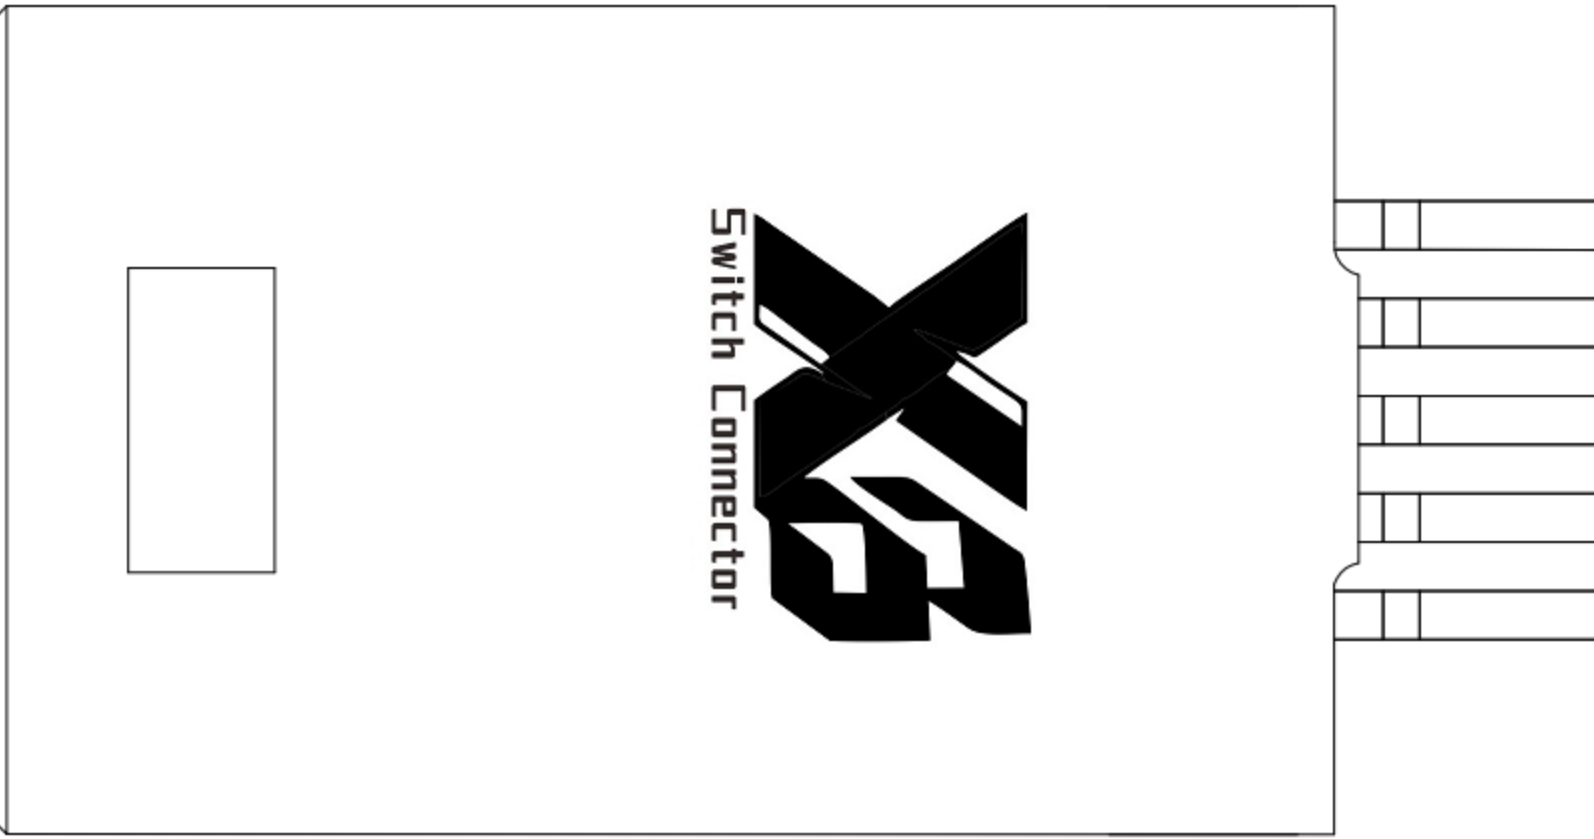


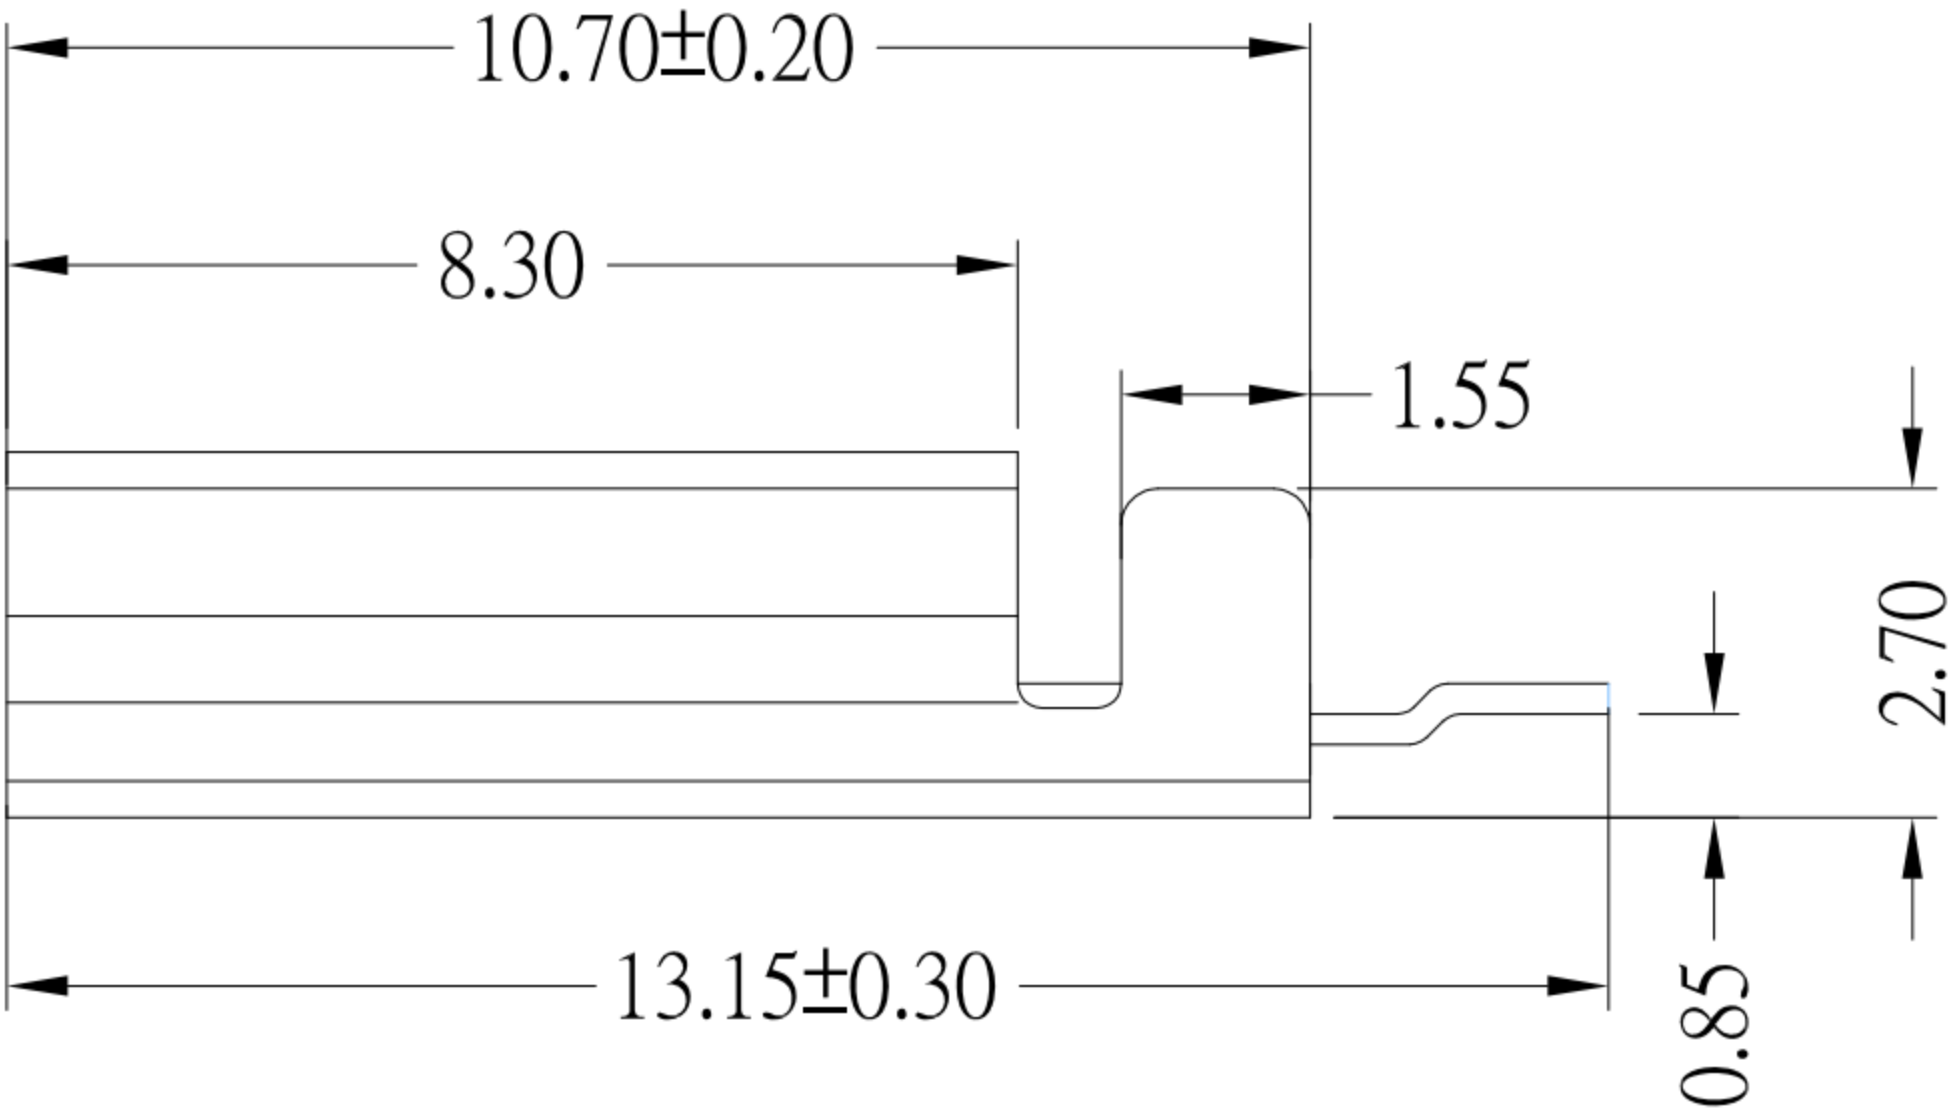

RECOMMANDED P.C.B LAYOUT

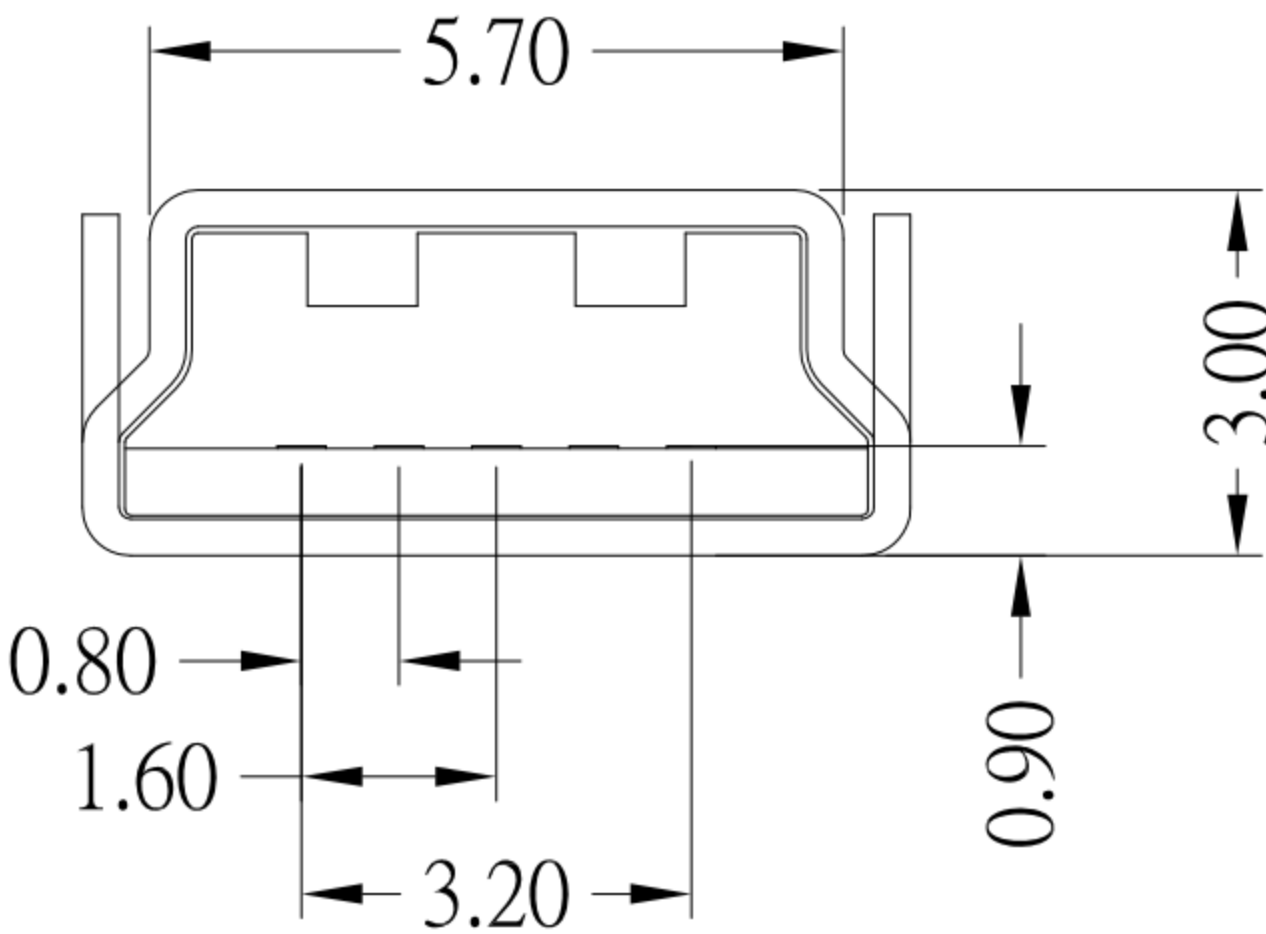

SPECIFICATIONS

Material:

- 1.Housing: LCP
 - 2.Contact: Brass
 - 3.Shell: Spcc
- Finish:
- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
 - 2.Shell: Nickel under Plated surface layer


Electrical Characteristics:

- 1.rating: 30V AC , 1.5 A
- 2.Contact resistance: 30 mΩ Max
- 3.Insulation resistance: 1,000 MΩ Min
- 4.Dielectric withstanding voltage: 500V AC



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONI CS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 Above 5 ~ 30 Above 30 ~ 50 Above 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	---	---------------------------------------	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
Jack Lu	03/02/23					
CHECKED BY:	DATE	FINISH		MODLE	MINI USB 5P Male 板端 SMT帶柱	
Jacky Chen	03/02/23	SCALE	1 : 1	DWG NO.	MUSB-5BPLM1-S236	SIZE
APPROVED BY:	DATE					A4
Tony Kao	03/02/23	SHEET NO.	1 of 1	PART NO.	MUSB-5BPLM1-S236	VER
						R2

2	更新圖面	Jack	030223
1	新增尺寸	Jack	061121
ITEM NO.	DESCRIPTION	DRAWN	DATE