



SUA-110P6x-x-S235

SHELL : COLOR :

Blank : BRASS

I : SPCC

Black: B

White : W

SPECIFICATIONS

Electrical:

- 1.Dielectric Withstanding Voltage: AC 500 V
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Contact Resistance: 30 mΩ Max




Material:

- 1.Housing: PBT ,UL94V-0
- 2.Terminal: Phosphor Bronze
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer


PCB LAYOUT MOUNTING PATTERN

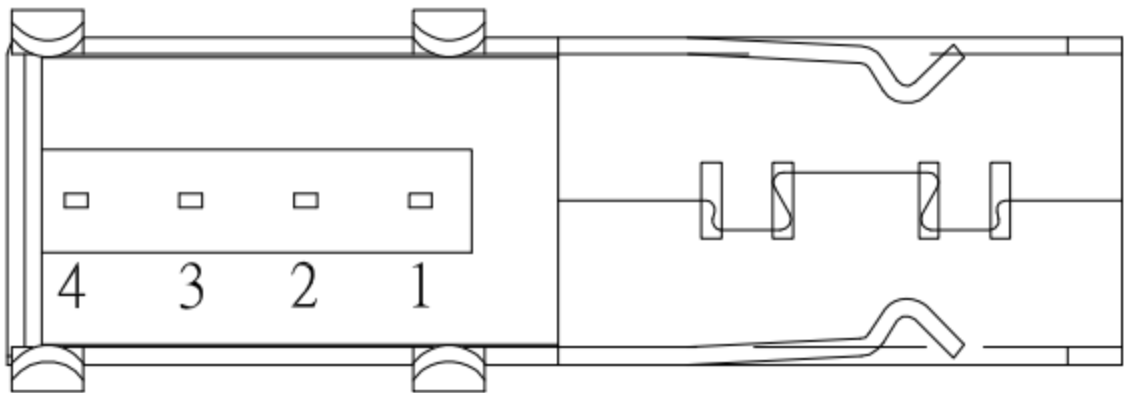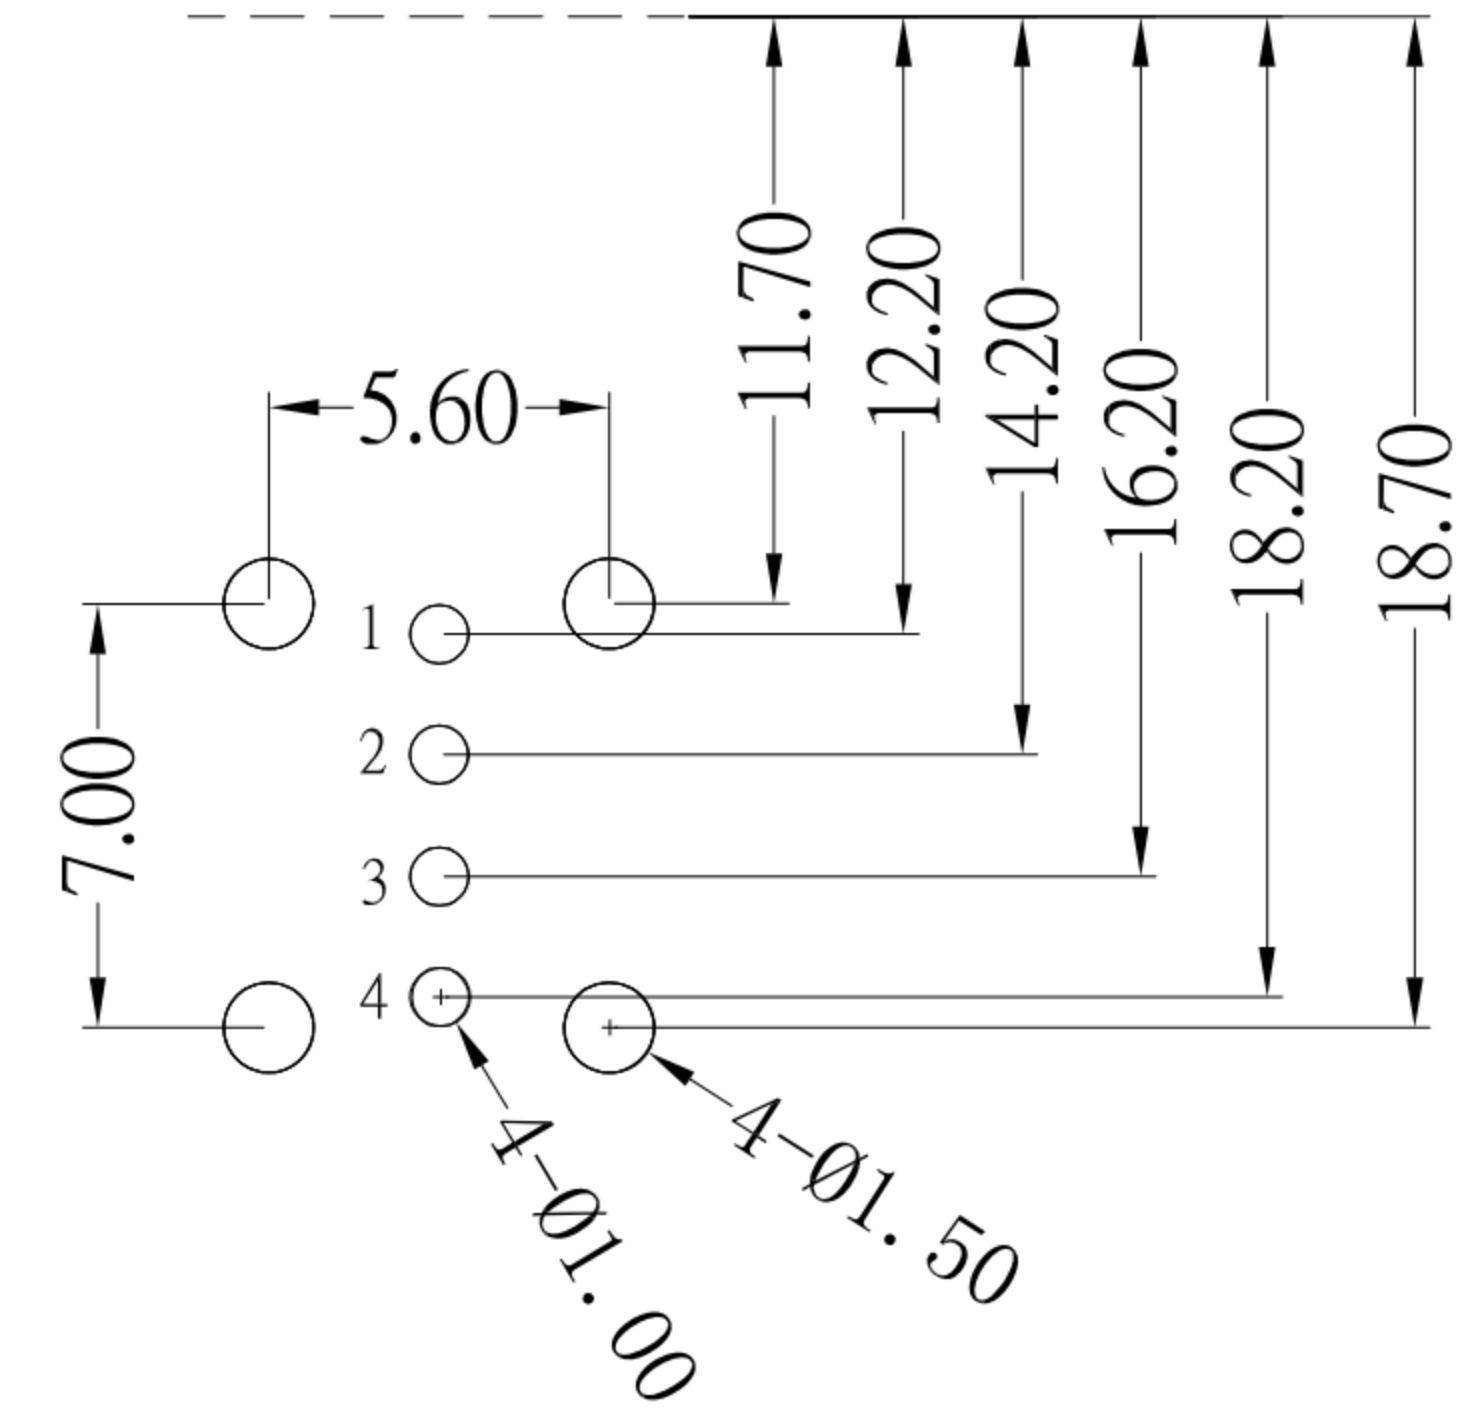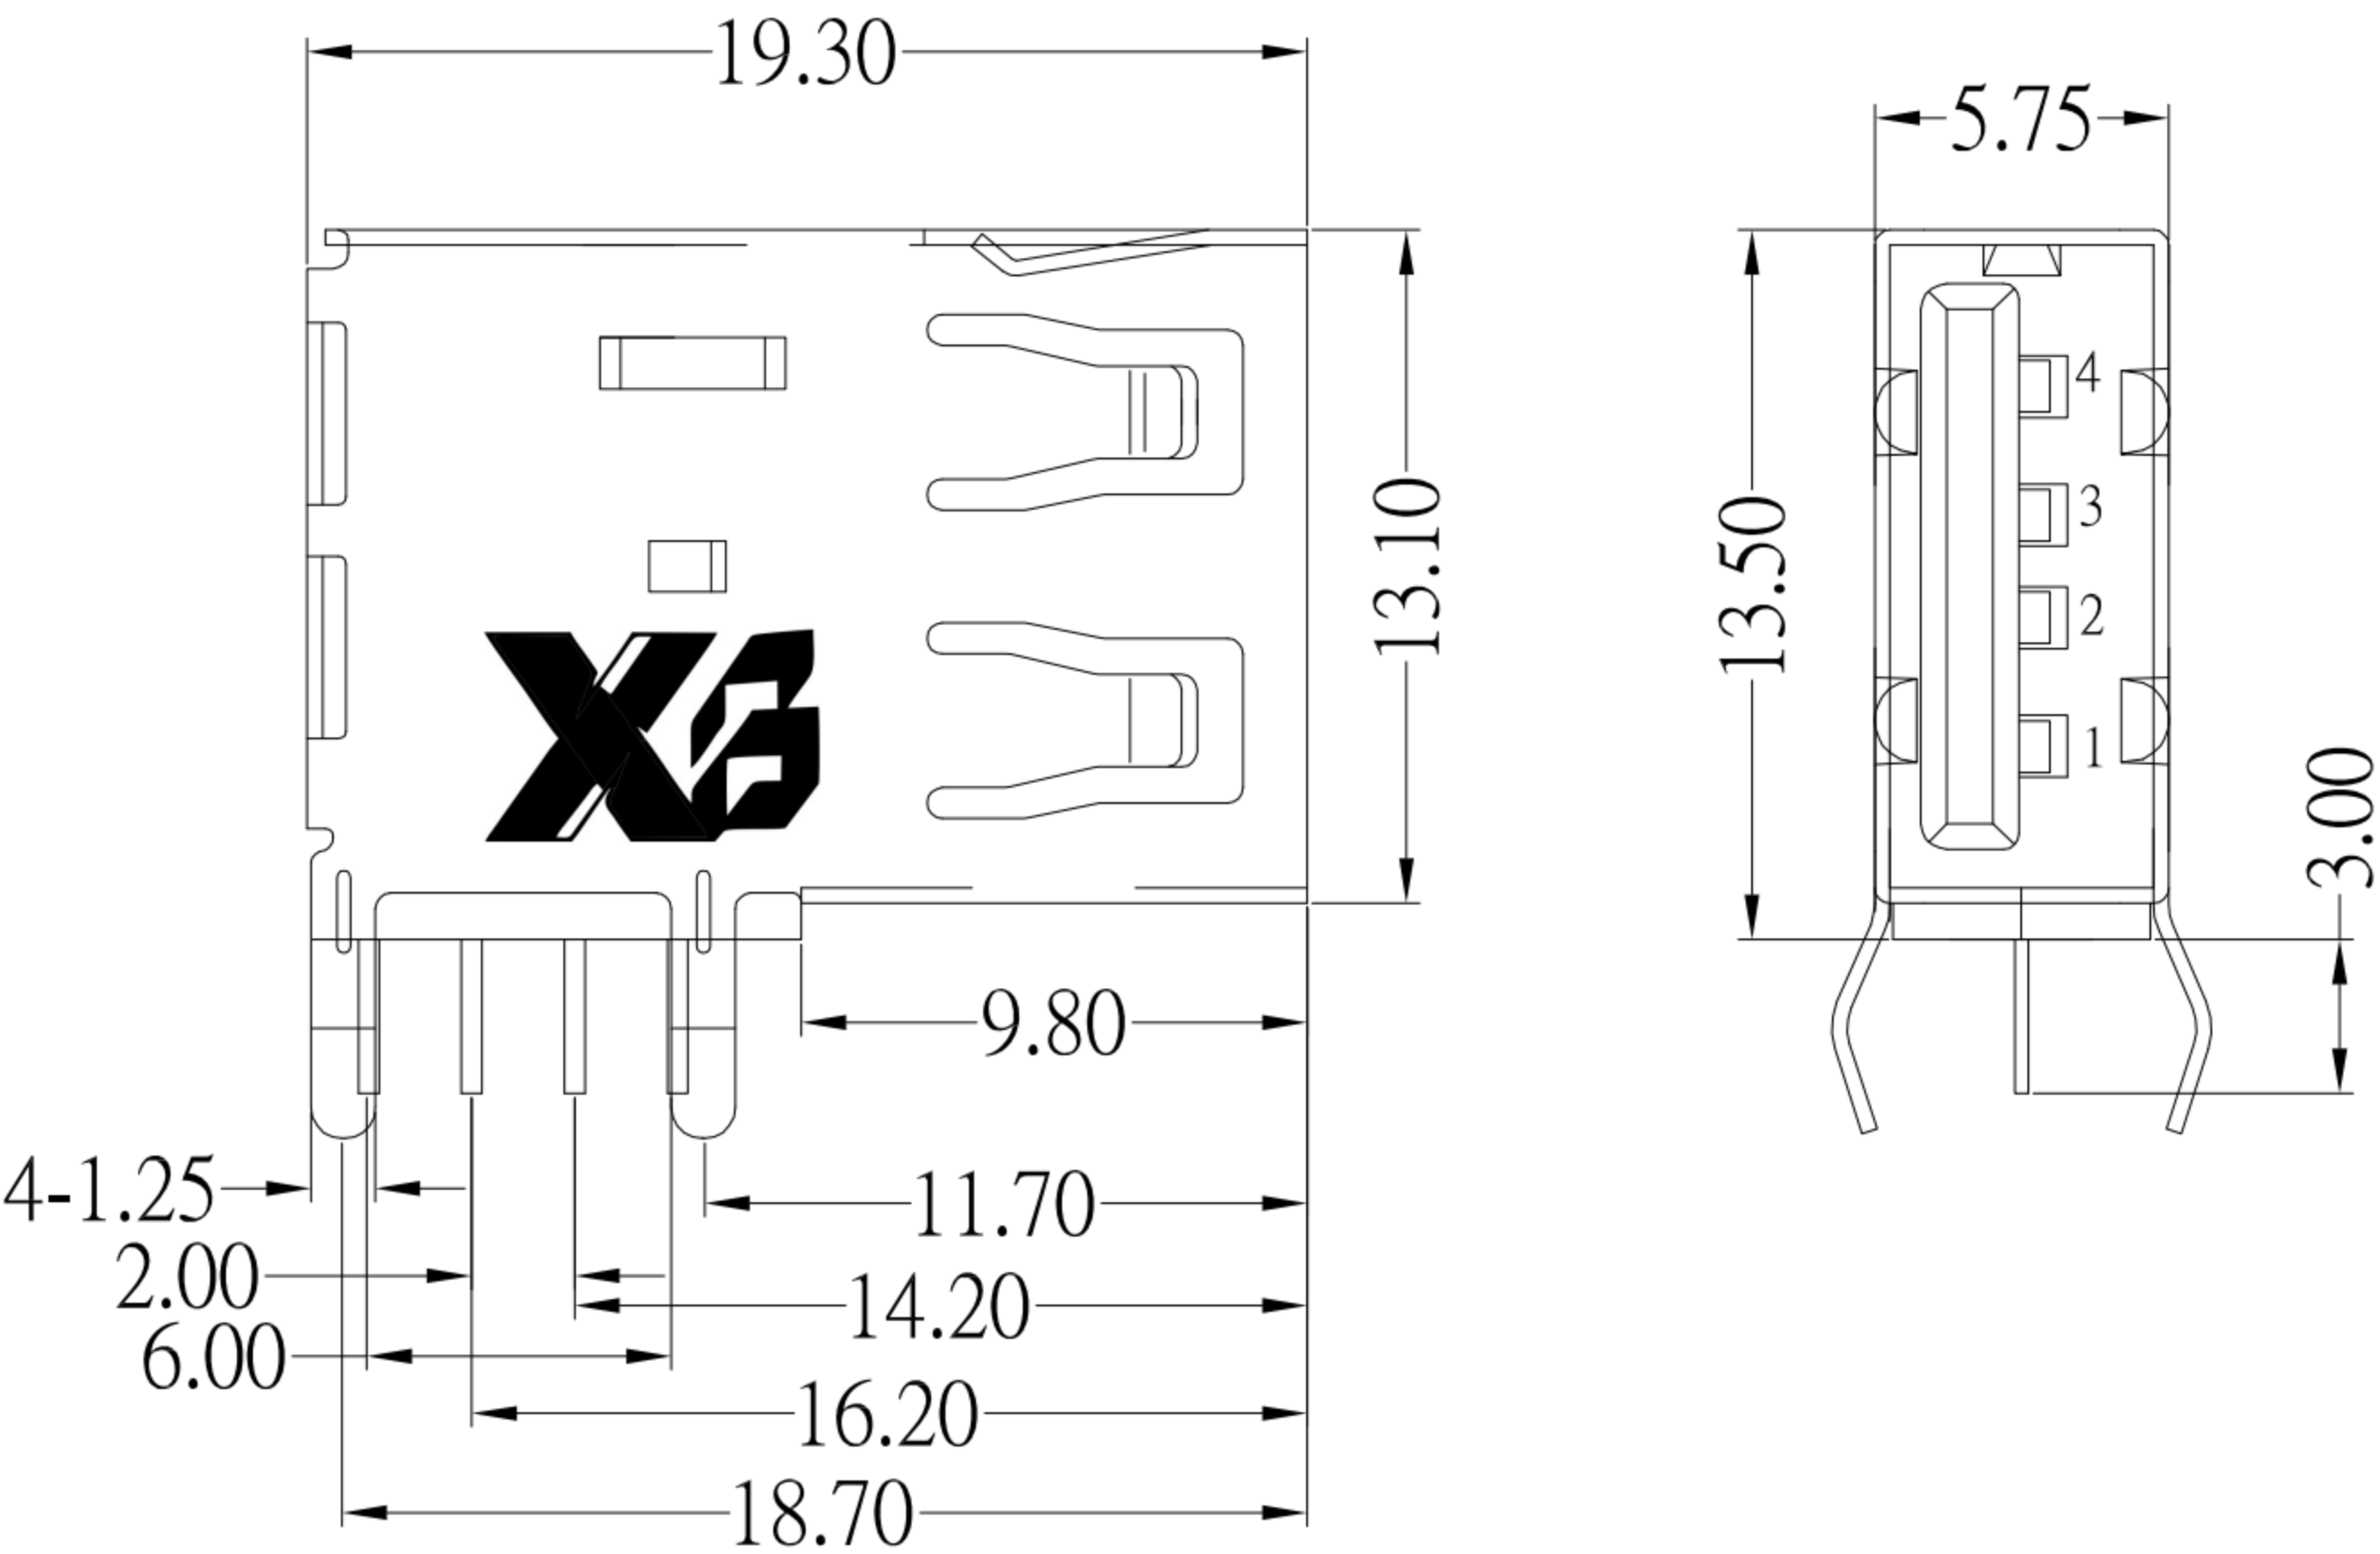



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50 Angle	±0.2 ±0.3 ±0.4 ±0.5 ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	---------------------------------------	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	01/24/18				
CHECKED BY:	DATE	FINISH		MODLE	USB A/F 側插無捲邊有後蓋
Jacky Chen	01/24/18				
APPROVED BY:	DATE	SCALE	1 : 1	DWG NO.	SUA-110P6x-x-S235
Tony Kao	01/24/18	SHEET NO.	1 of 1	PART NO.	SUA-110P6x-x-S235
					SIZE A4
					VER R4