



SUA-110V26I-x-S236

Color :

Black : B

White : W

SPECIFICATIONS

Electrical:





- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30 VDC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MΩ Min

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

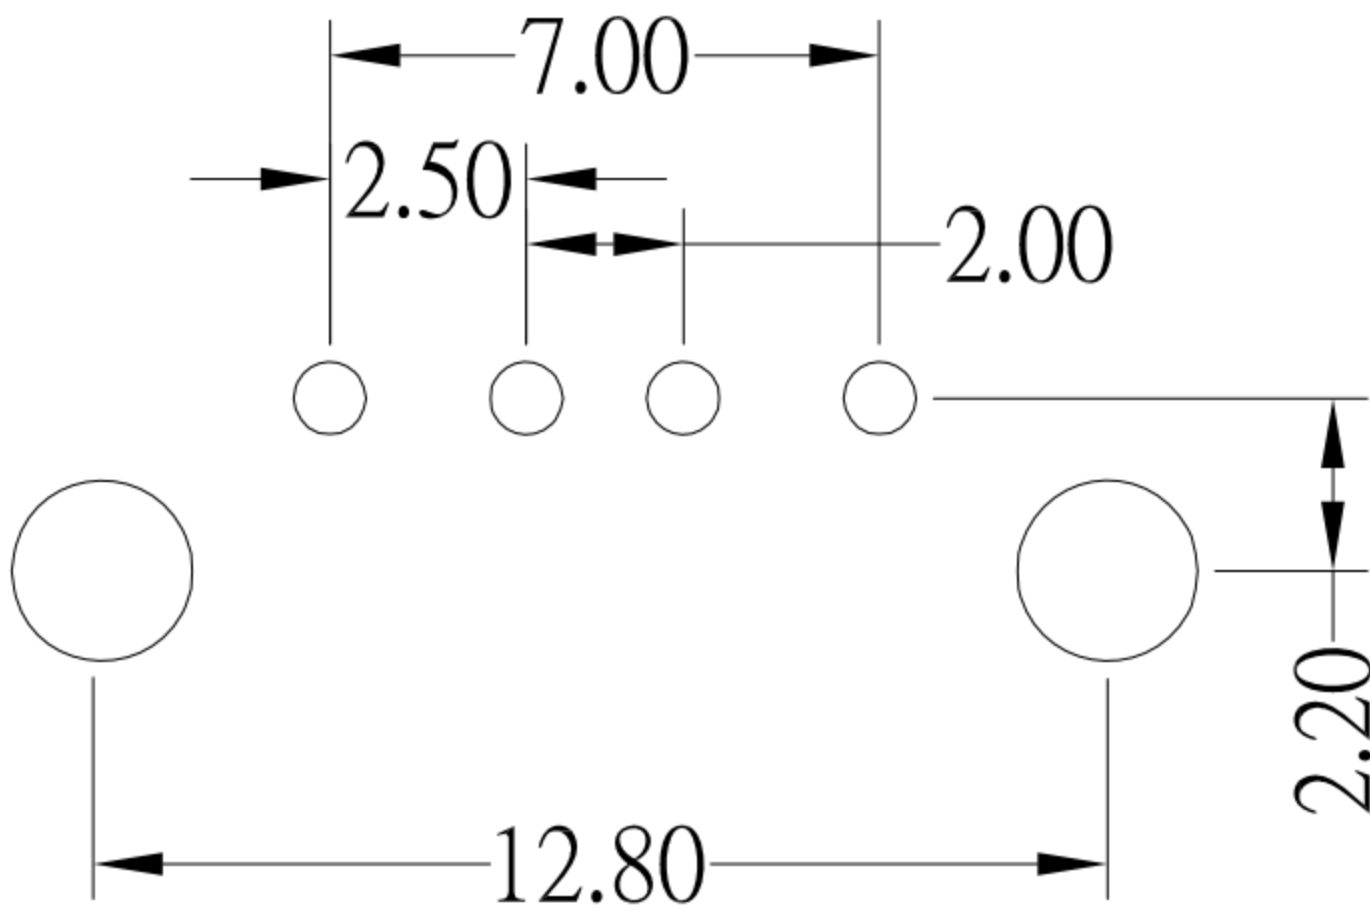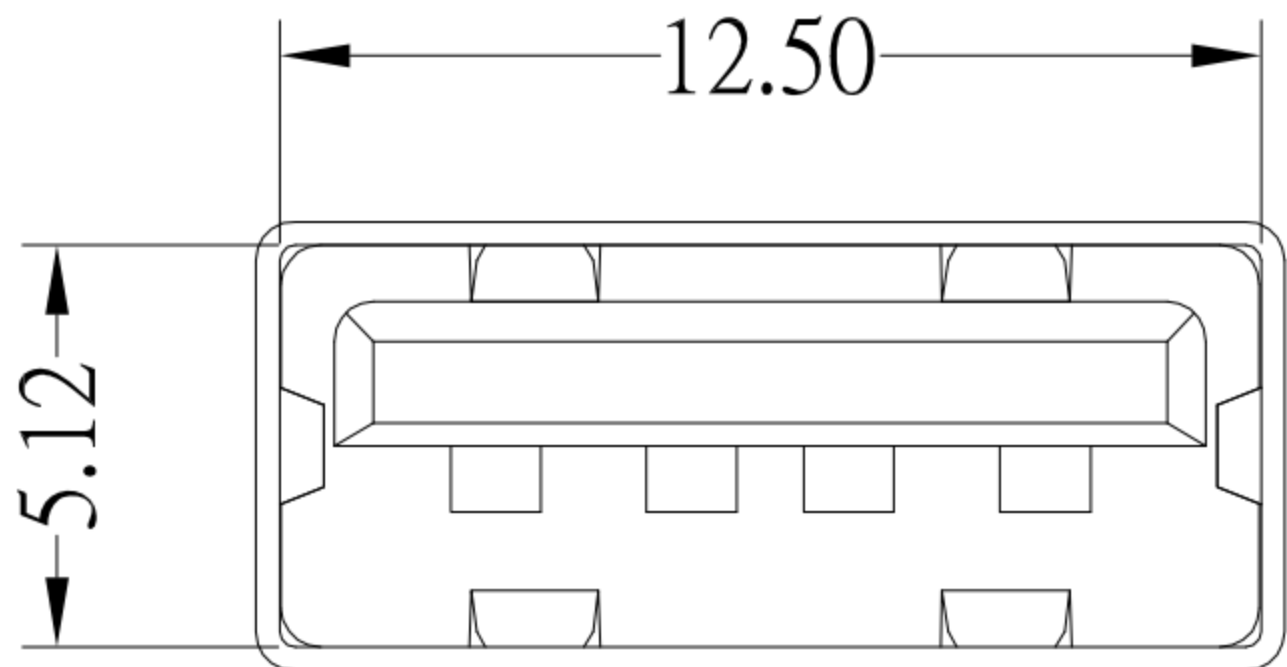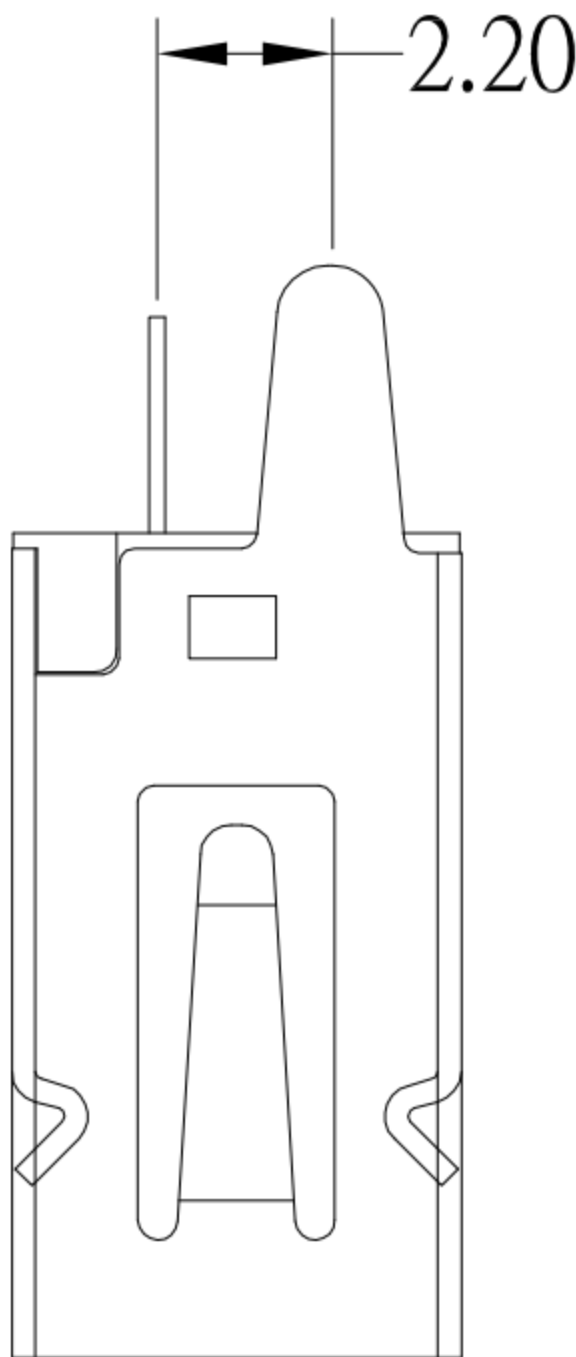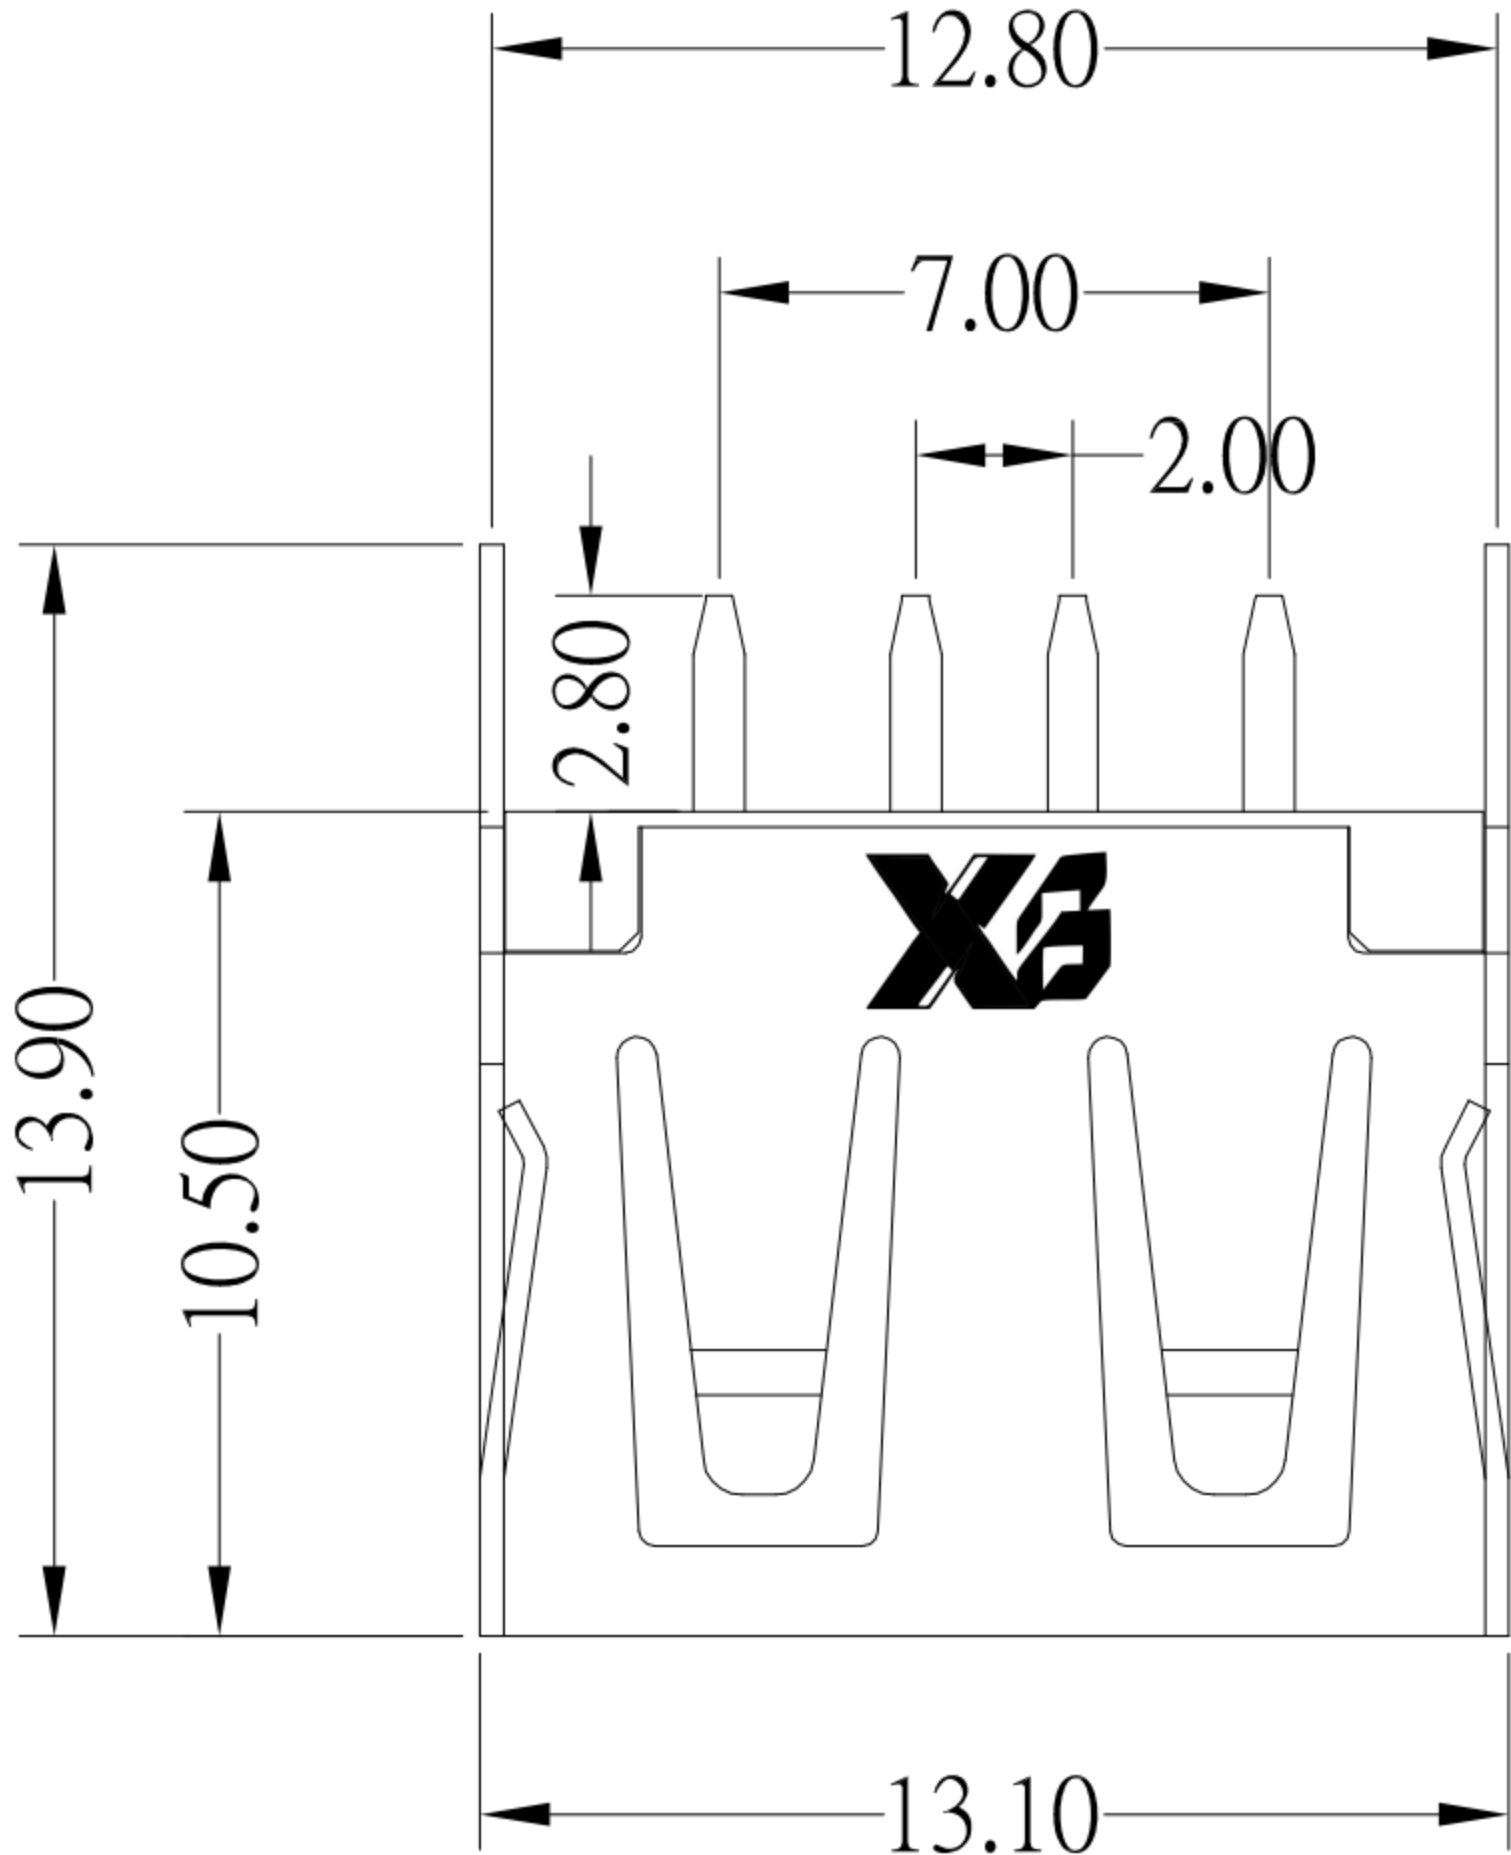

P.C.B LAYOUT MOUNTING PATTERN



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	±0.2	3RD. ANGEL'S		UNITS	MM
	Above 5 ~ 15	±0.3				
	Above 15 ~ 30	±0.4				
	Above 30 ~ 50	±0.5				
	Angle	±0.3°				

1	更新外殼材質只做SPCC	Jack	051121
ITEM NO.	DESCRIPTION	DRAWN	DATE

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	05/11/21			MODLE	USB AF 直立式 插板直腳無捲邊 L10.5mm 腳距 2.20mm
CHECKED BY:	DATE	FINISH		DWG NO.	SUA-110V26I-x-S236
Jacky Chen	05/11/21	SCALE	1 : 1		
APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SUA-110V26I-x-S236
Tony Kao	05/11/21				