



SUA-210HSx-xx-S236

外殼材質：Housing Color：

Blank:BRASS
I:SPCC

Black : B
White : W

鍍層厚度：

Blank : 1u"
2 : 15u"
3 : 30u"

SPECIFICATIONS

Electrical:



- 1.Contact Resistance: 30 mΩ Max
- 2.Insulation Resistance: 1,000 MΩ Min
- 3.Dielectric Withstanding Voltage: 500V AC

Material:





- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: Brass / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

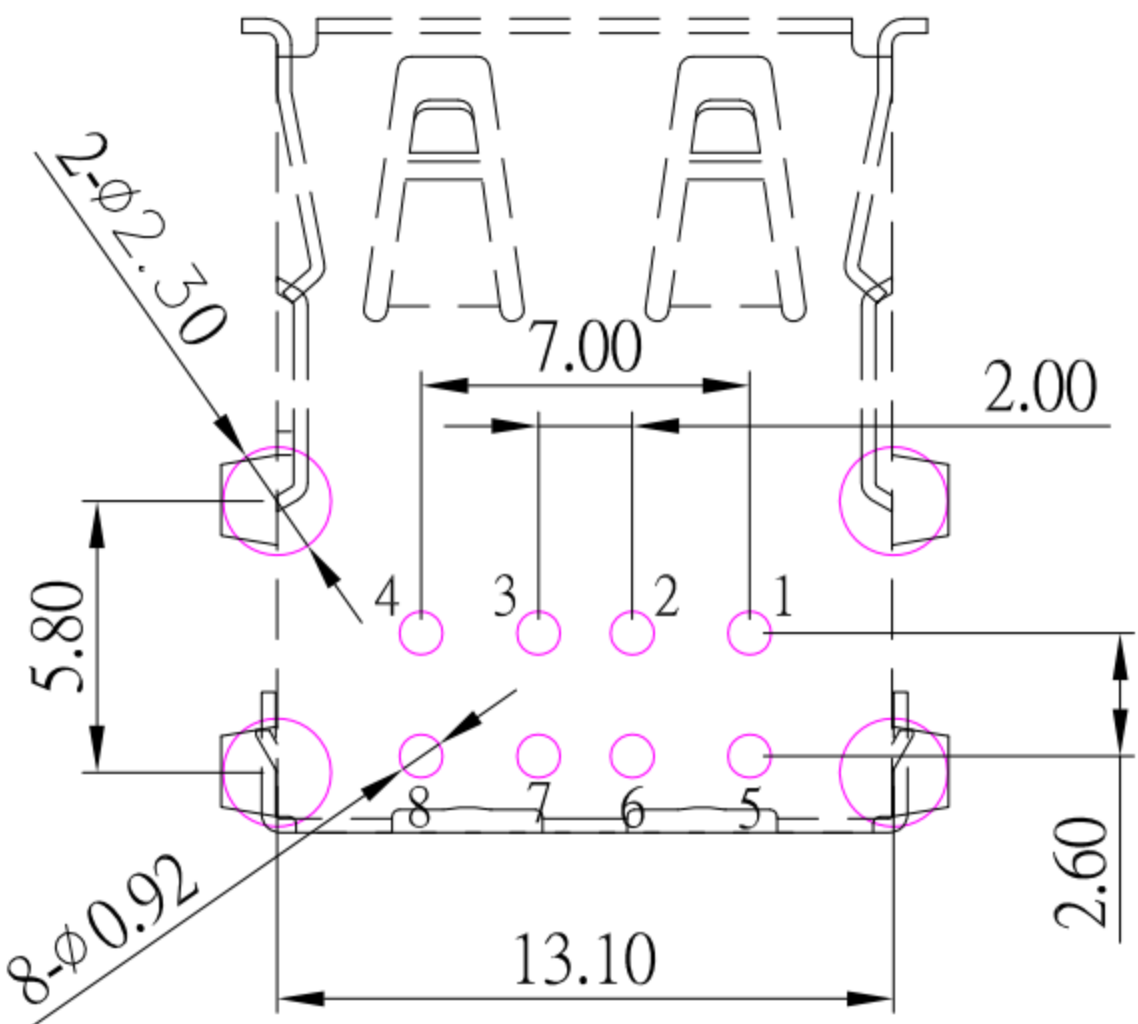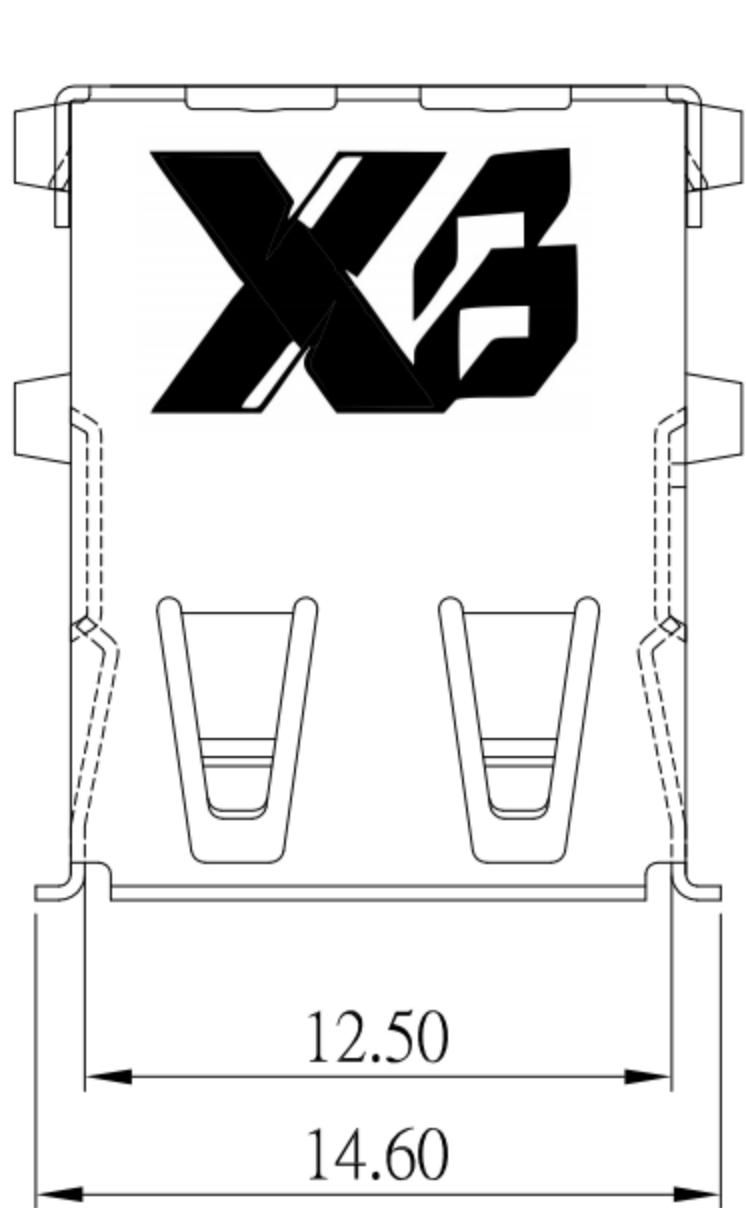


PCB LAYOUT

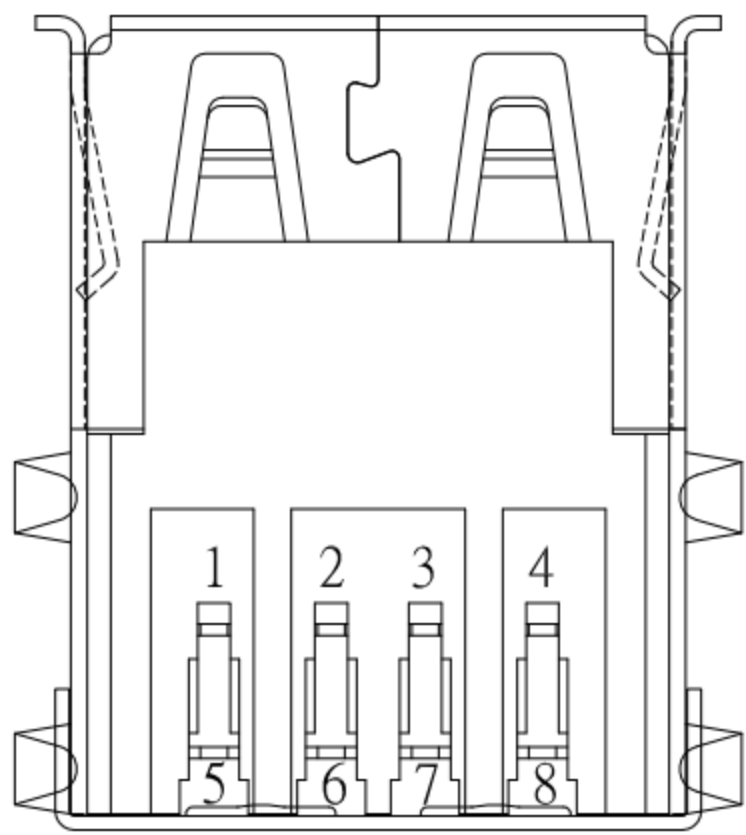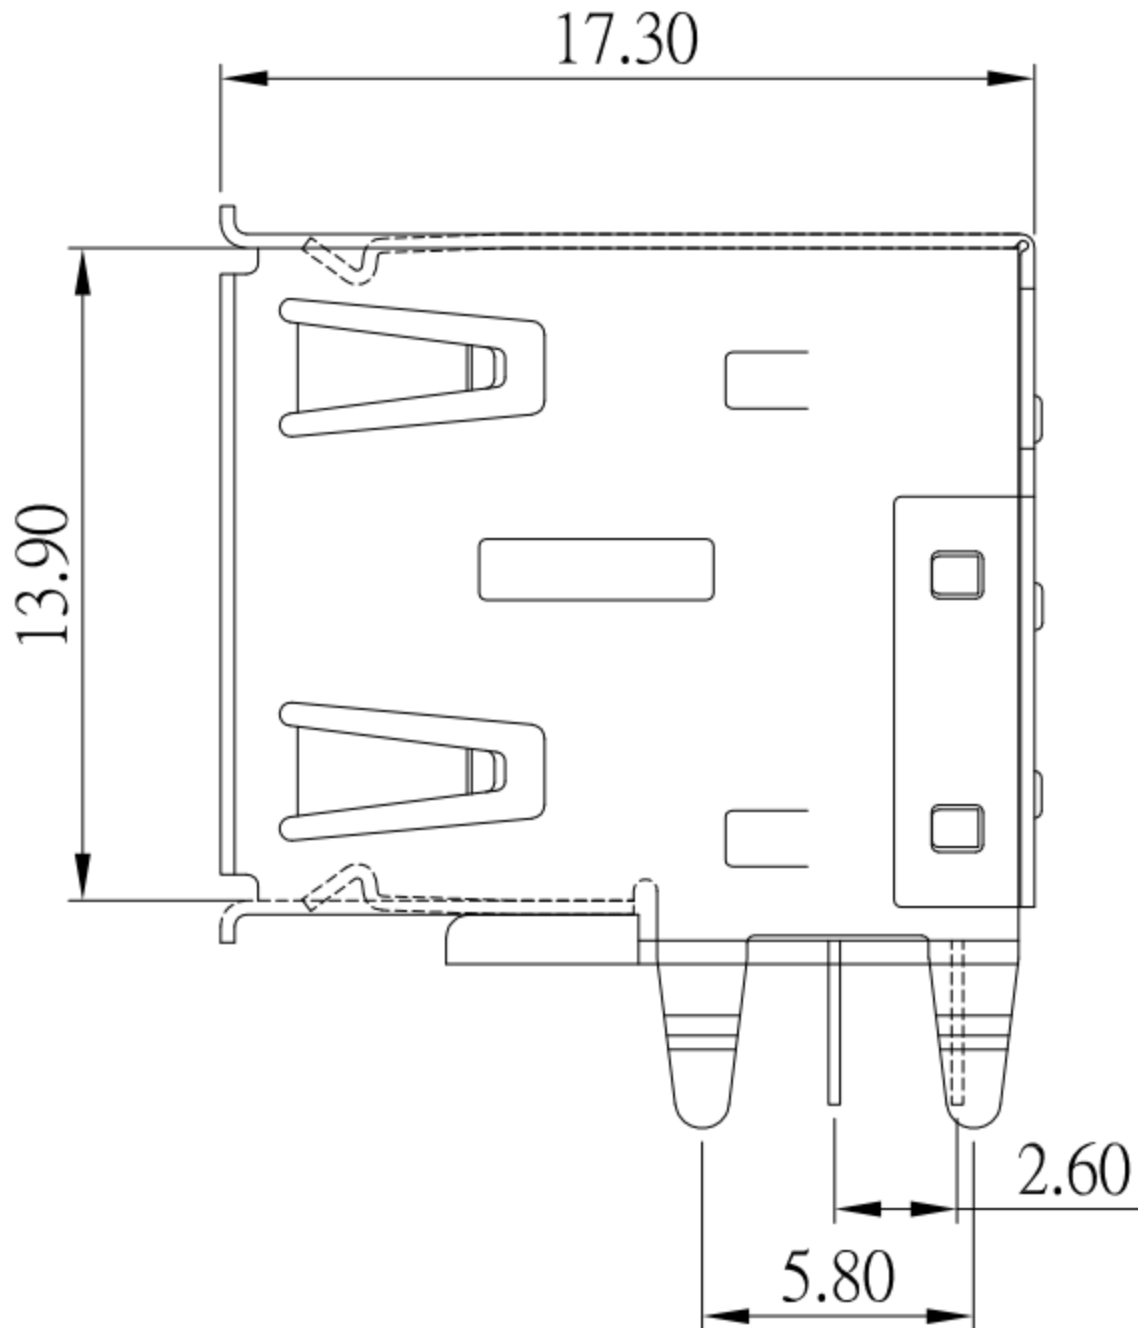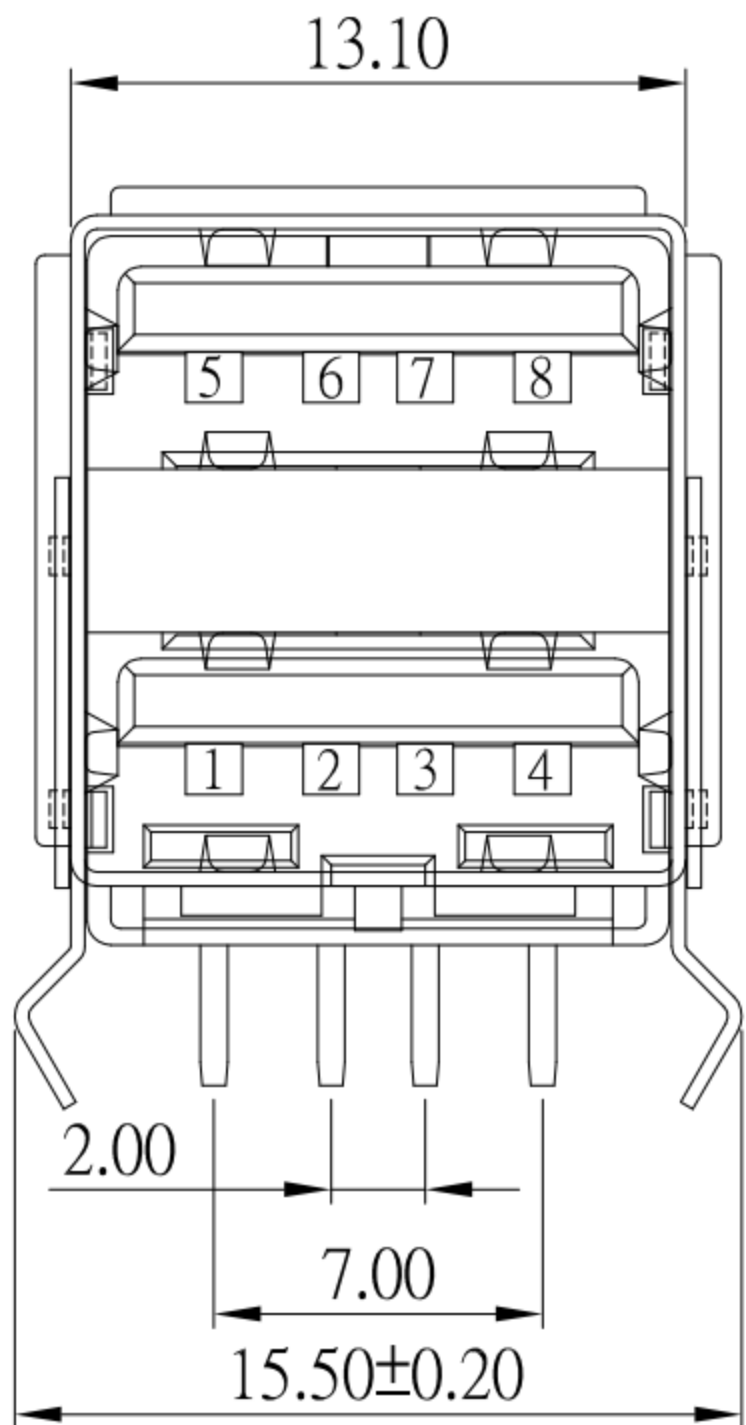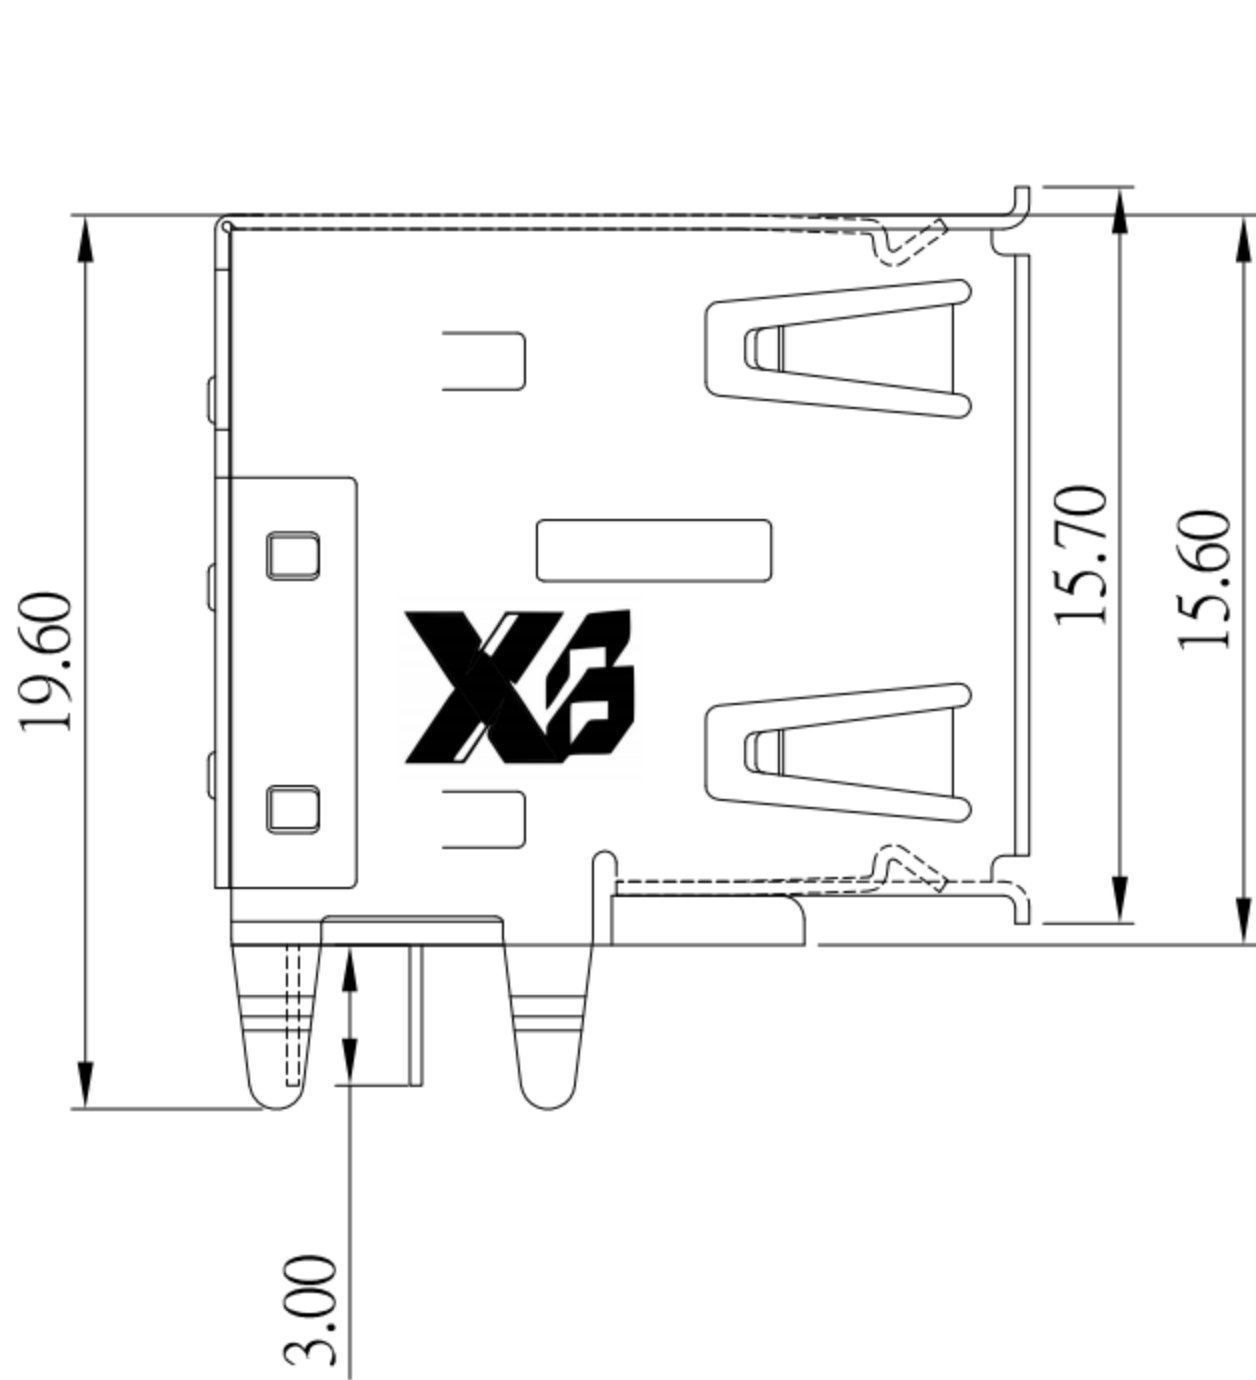

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 05/11/22
CHECKED BY: Jacky Chen
DATE: 05/11/22
APPROVED BY: Tony Kao
DATE: 05/11/22

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	USB A/F 雙層半包外殼平彈
SCALE	DWG NO.	SUA-210HSx-xx-S236
SHEET NO.	PART NO.	SUA-210HSx-xx-S236

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新Contact材質	Jack	051122
2	新增鍍層厚度選項	Jack	041520
1	新增PIN編號	Jack	051619