


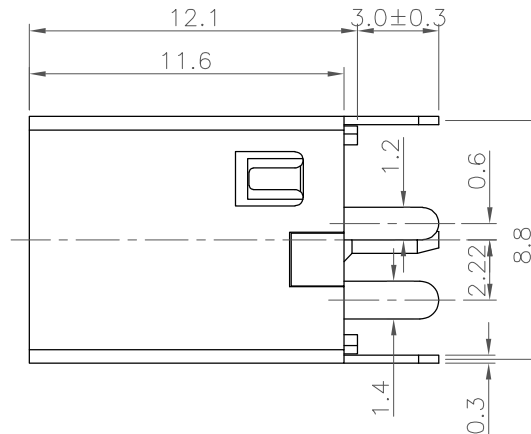
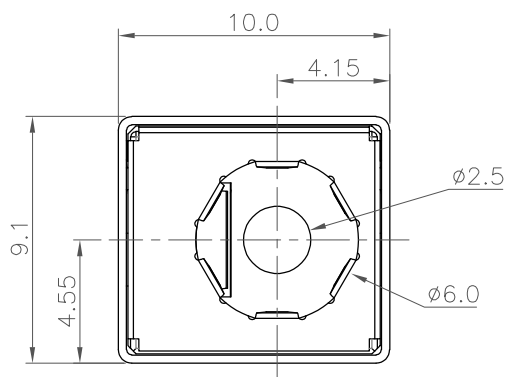
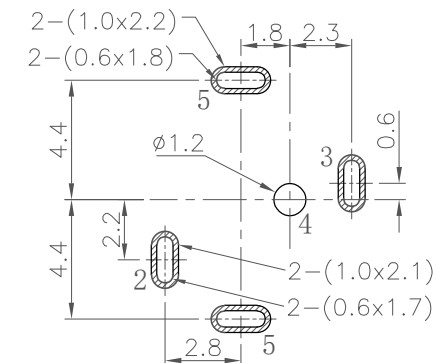




P. C. B LAYOUT
TOP VIEW

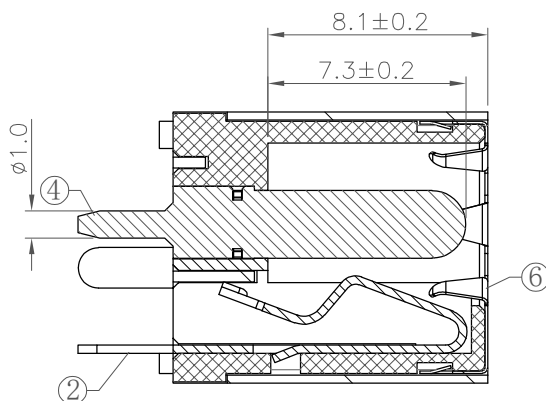

SCHEMATIC



SECTION

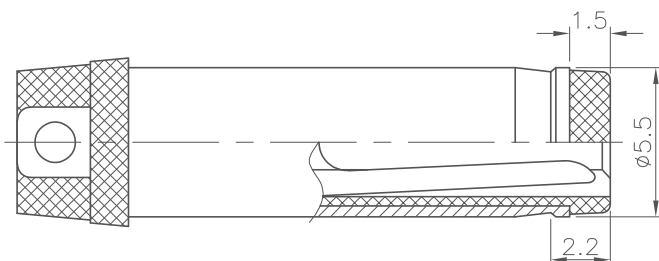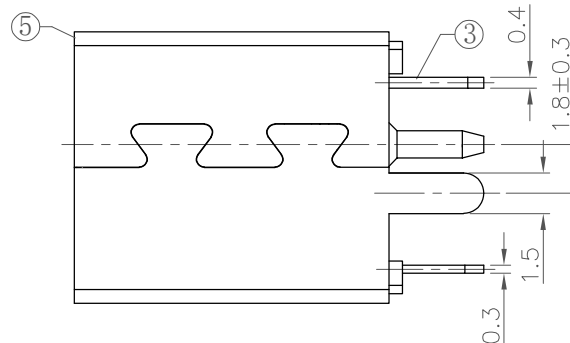

RECOMMENDED PLUG

SPECIFICATION

1. Rating : DC 20V 5.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

6	COAT	1	SUS301	N/A
5	SHELL	1	SPCC	Ni-Plating
4	PIN	1	ZINC ALLOY	Ni-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES


DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	± 0.50	X.	$\pm 2^\circ$
X.X	± 0.30	X.X	$\pm 1^\circ$
X.XX	± 0.20	X.XX	
X.XXX	± 0.10	X.XXX	

3RD ANGLE PROJECTION


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	GAO. PENG 2025.3.28	PART NAME:	$\Phi 5.5$ 立式 H=12.1 DC POWER JACK
CHECK:		PART NO.	XB-DC-550250-0760-20000H
APPROVED	HE. LONG. FEI 2023.3.28	SHEET: 1/1	REV.: A1
		DRAWING NO	




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------





单重:2.5g

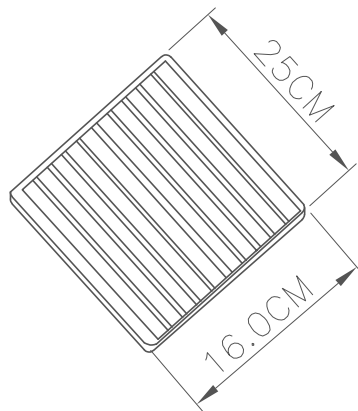

吸塑盒:140 PCS/盘

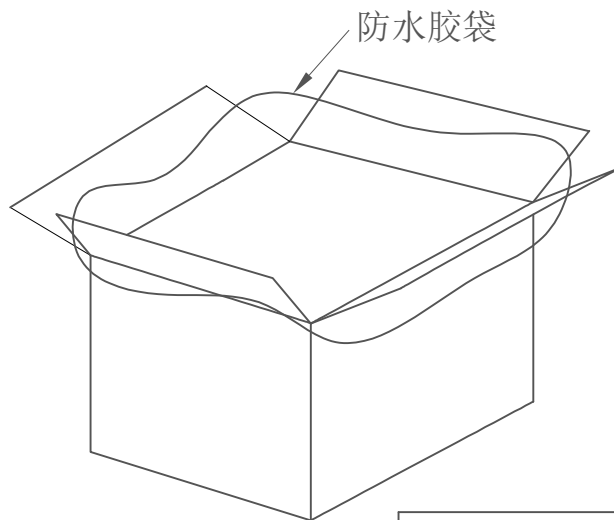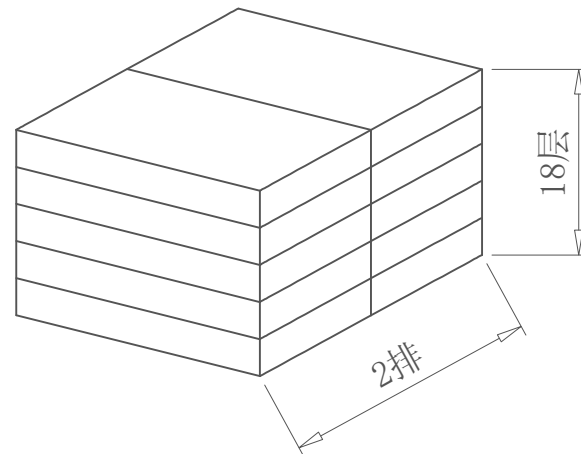

防水胶袋

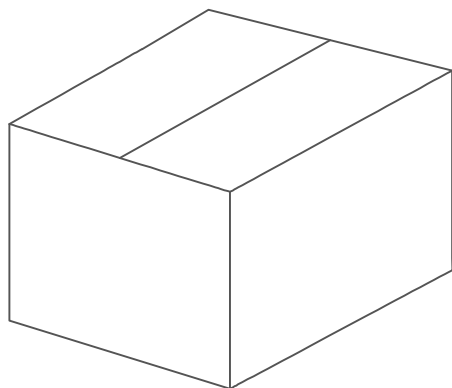

纸箱尺寸: 34*28*20.5 cm

数量: 5040 PCS

净重: 12.6 KG

毛重: 14.7 KG

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—

3RD ANGLE PROJECTION

DESIGN:	GAO. PENG 2020.5.10	PART NAME: Φ5.5立式 H=12.1 DC POWER JACK-包装图	
CHECK:		PART NO. XB-DC-550250-0760-20000H	
APPROVED	HE. LONG. FEI 2020.5.10	SHEET: 1/1	REV.: A1
		DRAWING NO	

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------