

A

B

C

D

E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.05.06





1

2


3

4


5

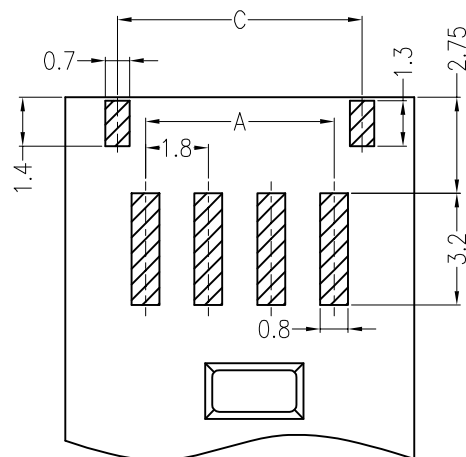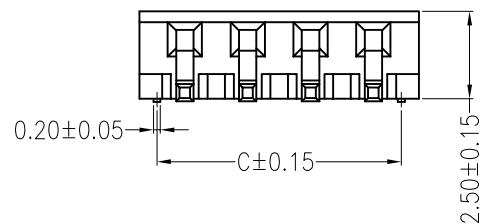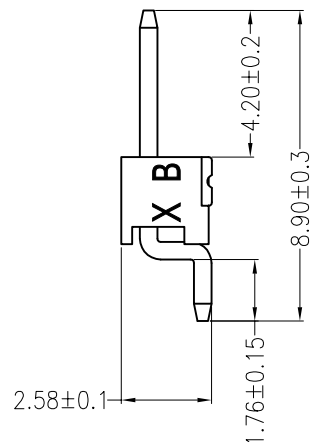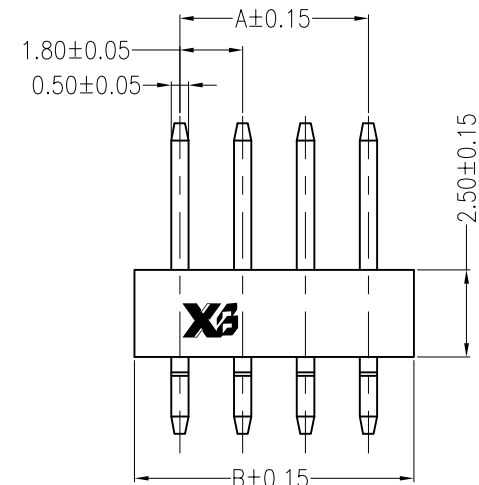

Mating Aluminum plate detail

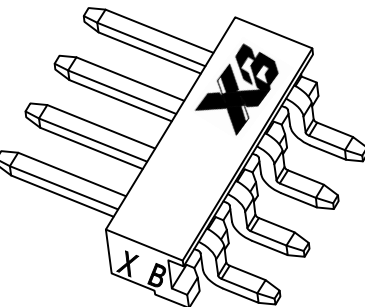

名称	DIM=A	DIM=B	DIM=C	备注
L010A-01		B=2.60	C=1.60	
L010A-02	A=1.80	B=4.40	C=3.40	
L010A-03	A=3.60	B=6.20	C=5.20	
L010A-04	A=5.40	B=8.00	C=7.00	
L010A-03(2)	A=3.60	B=6.20	C=5.20	中间空一针
L010A-04(2)	A=5.40	B=8.00	C=7.00	中间空二针
L010A-04(3)	A=5.40	B=8.00	C=7.00	右边起空第二针

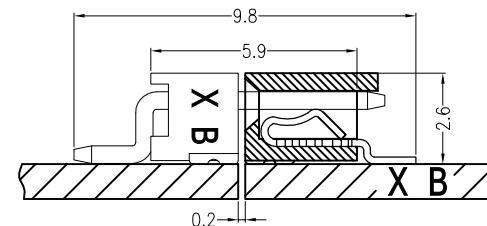

Assembly Layout

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20m\Omega$ 绝缘电阻 (Insulation resistance): $\geq 800M\Omega$

额定电压 (Rated voltage): 125V AC DC

额定电流 (Rated current): 1.0A AC DC

耐电压 (Withstand Voltage): 800V AC/minute

温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

XB-L010A--F2MA-R**

PART No.

No. FOR CIRCUITS:

01~04

PLASTIC MATERIAL:

F2M=LCP (BEIGE)

PACKAGING:

P=PE

R=REEL

PLATING:

A=Sn

C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	01~04PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE: -

1.8mmPITCH 90°WAFER SMT TYPE

X.±0.5	X.±5°	USE:	CUSTOMER
.X±0.3	.X±2°	APPD:	邵敬和
.XX±0.25	.XX±1°	CHKD:	田峰
--	--	DR:	吴丹平
⊕	⊖	UNITS:	mm

PART NO.:

L010A-**-F2MA-R

DWG NO.:

GCCP-0019

SCALE

1 : 1

SHEET

1 / 1