
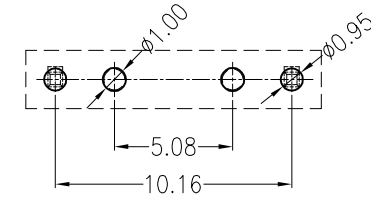
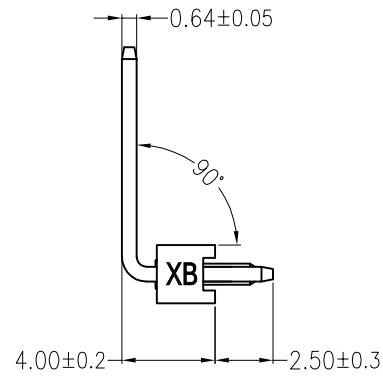


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.06.19

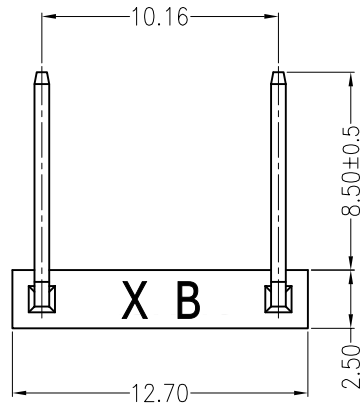




Board Layout

主要技术参数 Main Specifications

线 数 (Poles): 02 to 10
 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐 电 压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L011-10.16-B1MB2-P-3				
PART No.				SPECIAL CODE:
No. FOR CIRCUITS:				3=弯针8.5x2.5x4.0
10.16				PACKAGING:
				P=PE
				Metal code:
				2=Brass
PLASTIC MATERIAL:				PLATING:
B1M=PA46 (BEIGE)				B=MATTE Sn

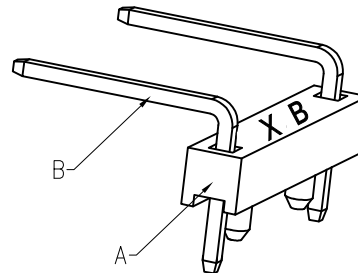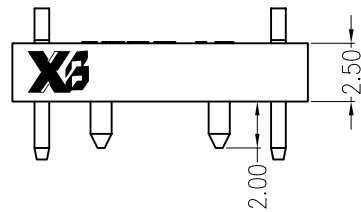

C				
B	CONTACT	2 PCS	Brass	Sn-plated
A	HOUSING	1 PCS	PA46	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
X.±0.5	X.±5°	USE:		PART NO.:
.X±0.3	.X±2°	CUSTOMER		L011-10.16-B1MB2-P-3
.XX±0.25	.XX±1°	APPD: 邵敬和		DWG NO.:
--	--	CHKD: 田峰		GCCP-0498
	UNITS: mm	DR: 吴丹平		SCALE 1 : 1
				SHEET 1 / 1