
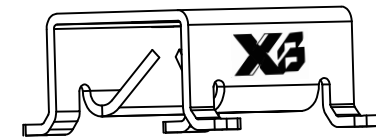

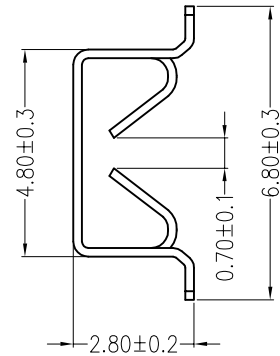


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.08.12

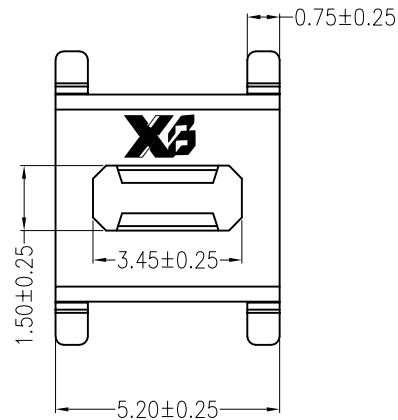


主要技术参数 Main Specifications


板 厚 (thickness): 1.0mm
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 额定电压 (Rated voltage): 250 V AC DC
 额定电流 (Rated current): 1.0A AC DC
 温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

L031B-1.0-000B1-R			
PART No.		PACKAGING:	
No.FOR PCB:		R=REEL	
1.0mm		PACKAGING:	
		1=PHOSPHORBRONZE	
PLASTIC MATERIAL:		PLATING:	
000=No plastic parts		B=MATTE Sn	

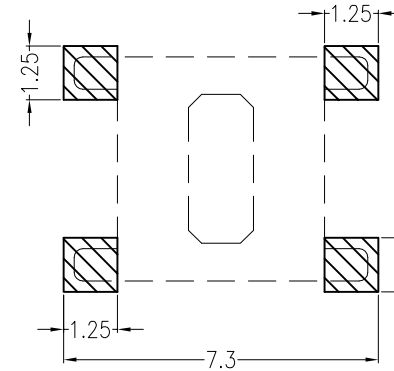

Board Layout

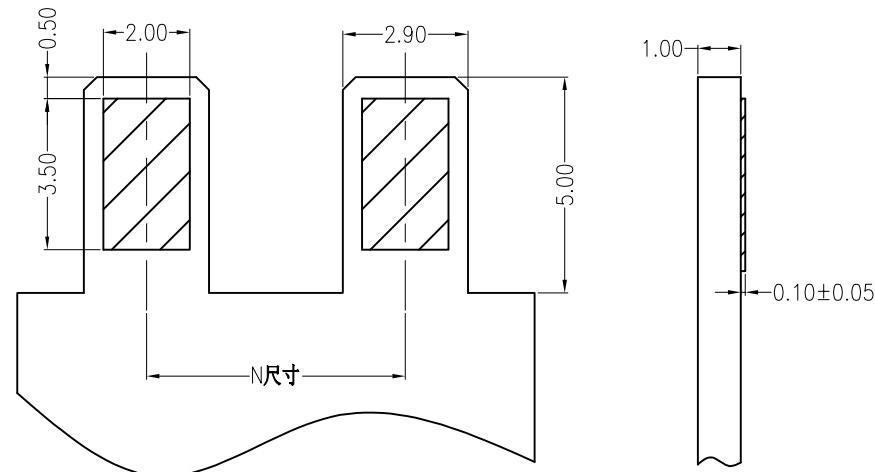

Mating PCB detail

C				
B				
A	CONTACT	1 PCS	PHOSPHORBRONZE	MATTE Sn-plated
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				TITLE: -
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	CUSTOMER	L031B-1.0-000B1-R	
.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	GCCP-1022	
⊕	UNITS: mm	DR: 吴丹平	SCALE	SHEET
			1 : 1	1 / 1